

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291671

Luminaire Tested: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1291671  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,  
E3PHLP1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 274.0 lumens  
Efficiency: N/A  
Efficacy: 30.4 lumens/watt  
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.6  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1291671  
CATALOG NUMBER: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K

### Luminous Intensity Polar Plot

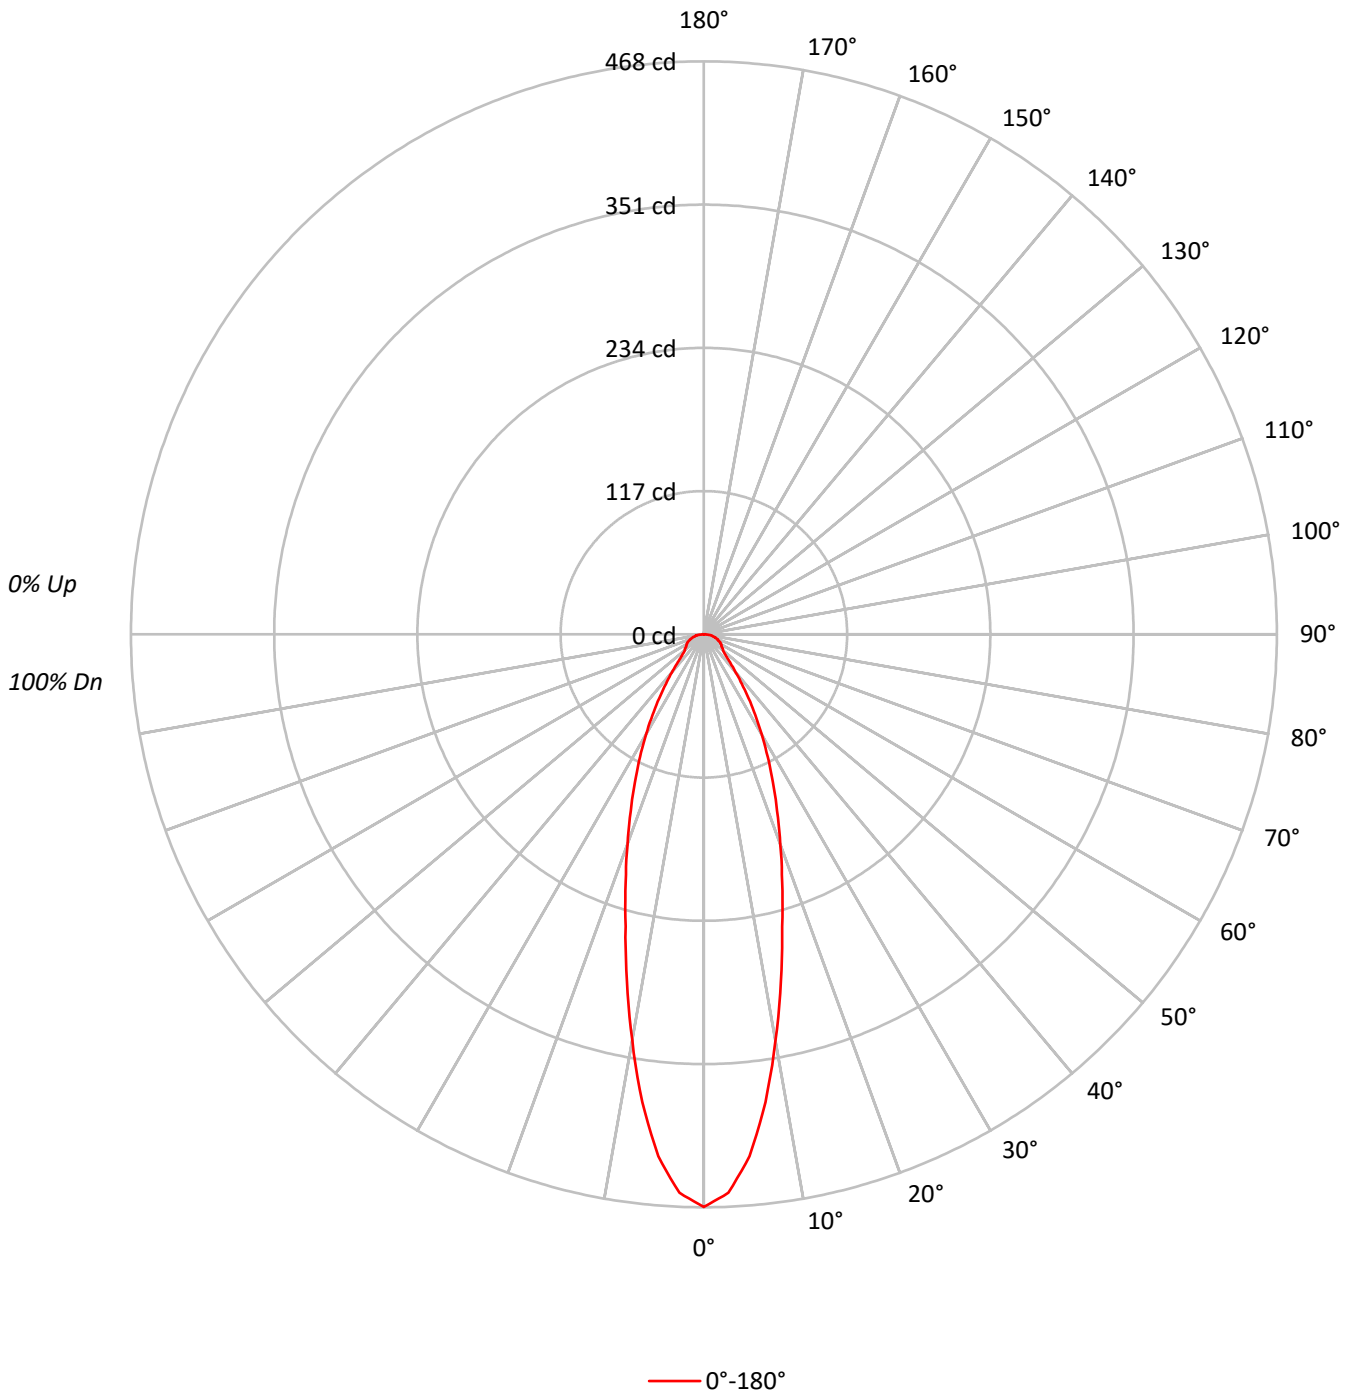



TEST NUMBER: P1291671

CATALOG NUMBER: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	90	90	90	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	81	81	81	81
3	99	91	85	80	96	89	84	80	87	82	78	84	80	77	82	79	76	74	74	74	74
4	93	84	78	73	91	83	77	72	81	76	72	79	74	71	77	73	70	68	68	68	68
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	63	63	63	63
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	59	59	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52	52	52	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49	49	49	49
10	69	59	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	102558
5°	94167
10°	75038
15°	56073
20°	42587
25°	32252
30°	23852
35°	17052
40°	11650
45°	8156
50°	6959
55°	6805
60°	7061
65°	7472
70°	7629
75°	7879
80°	8587
85°	8554

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 82.5°  
 Luminance: 9912 cd/sqm



TEST NUMBER: P1291671

CATALOG NUMBER: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	37.9	13.8
10°-20°	69.3	25.3
20°-30°	61.4	22.4
30°-40°	40.2	14.7
40°-50°	21.5	7.8
50°-60°	16.2	5.9
60°-70°	14.0	5.1
70°-80°	9.6	3.5
80°-90°	3.9	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	168.6	61.5
0°-40°	208.8	76.2
0°-60°	246.5	90.0
0°-90°	274.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	274.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	468	
5°	428	38
15°	247	69
25°	133	61
35°	64	40
45°	26	21
55°	18	16
65°	14	14
75°	9	10
85°	3	4
90°	0	



TEST NUMBER: P1291671  
CATALOG NUMBER: P3AS09R15W2N902750DE010 E3PHLP1MW\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	467.7
2.5°	456.6
5°	427.8
7.5°	385.3
10°	337.0
12.5°	290.3
15°	247.0
17.5°	212.2
20°	182.5
22.5°	156.2
25°	133.3
27.5°	112.9
30°	94.2
32.5°	78.1
35°	63.7
37.5°	50.9
40°	40.7
42.5°	32.3
45°	26.3
47.5°	22.9
50°	20.4
52.5°	19.5
55°	17.8
57.5°	17.0
60°	16.1
62.5°	15.3
65°	14.4
67.5°	12.7
70°	11.9
72.5°	10.2
75°	9.3
77.5°	7.6
80°	6.8
82.5°	5.9
85°	3.4
87.5°	1.7
90°	0.0

(END OF REPORT)