

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291777

Luminaire Tested: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291777
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 229.0 lumens
Efficiency: N/A
Efficacy: 25.4 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291777
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

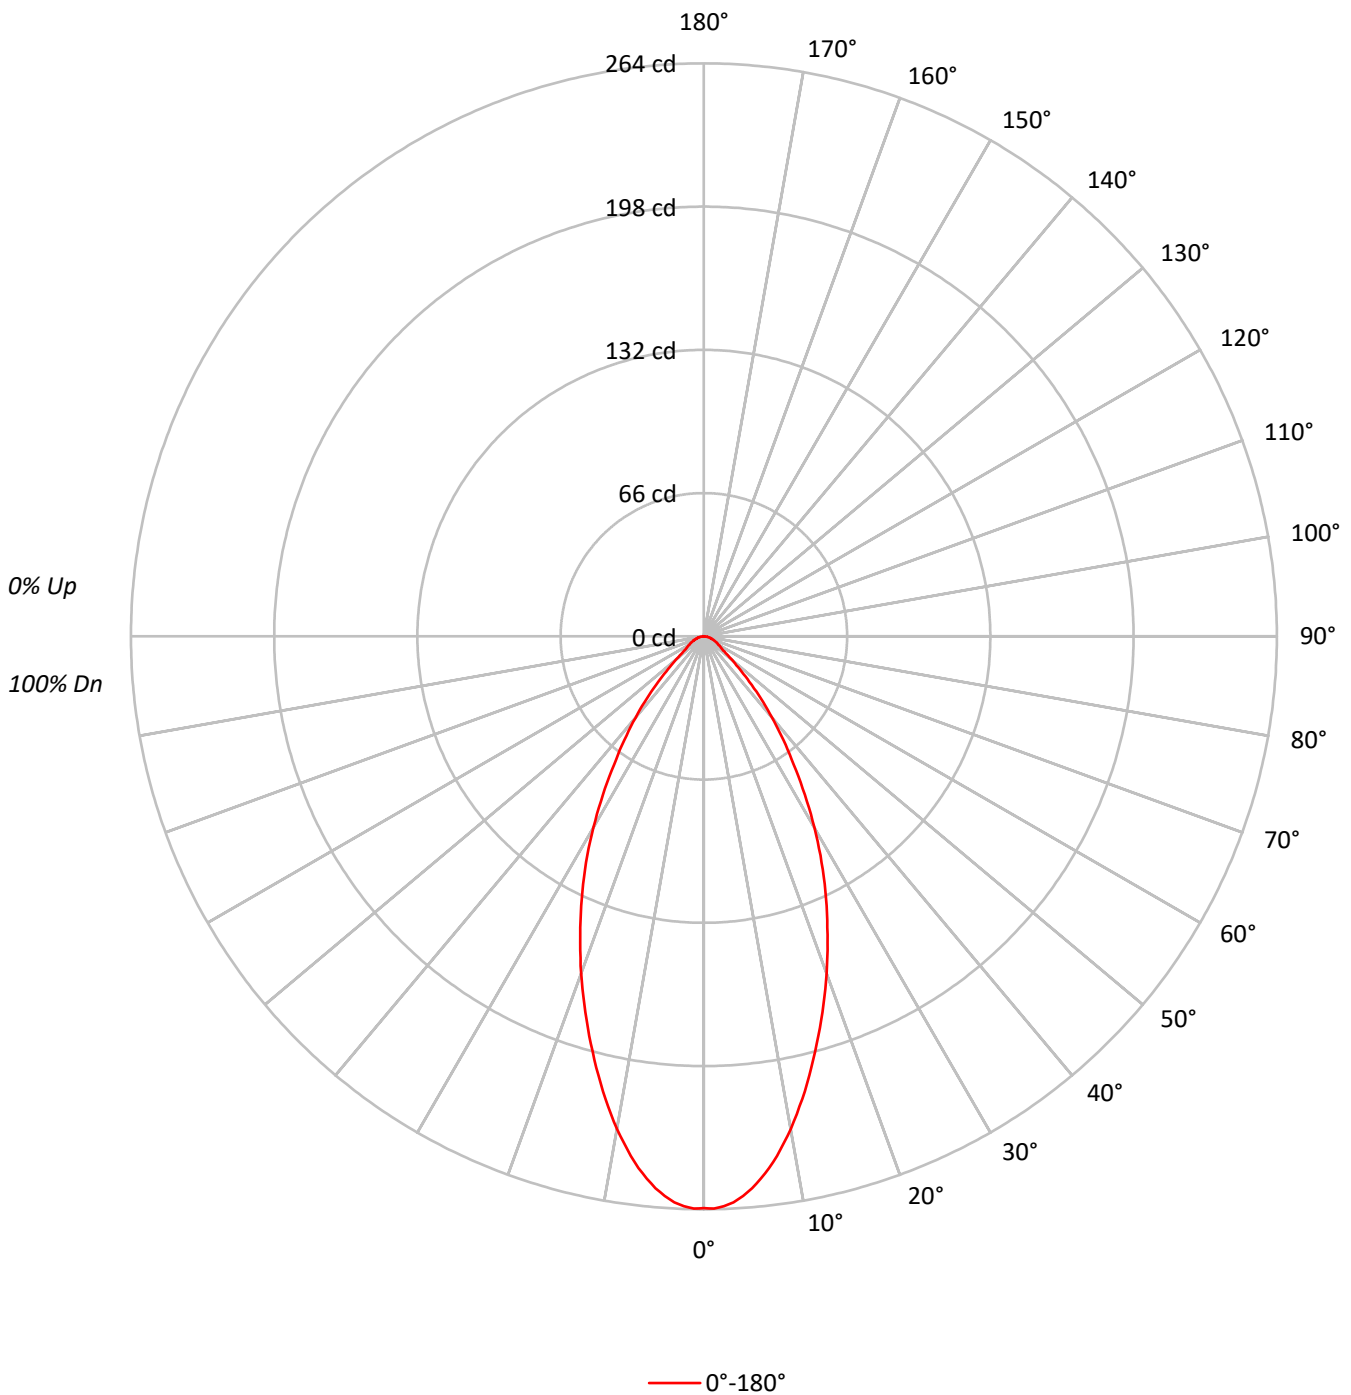



TEST NUMBER: P1291777
 CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			83
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			76
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	72	67	75	70	67	74	69	66	65			65
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60			60
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56			56
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52			52
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49			49
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	57759
5°	56196
10°	51346
15°	44972
20°	38597
25°	32228
30°	25776
35°	19327
40°	14026
45°	9179
50°	5731
55°	3900
60°	3421
65°	3165
70°	2949
75°	2711
80°	2526
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 9179 cd/sqm



TEST NUMBER: P1291777

CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.6	10.3
10°-20°	55.2	24.1
20°-30°	60.8	26.6
30°-40°	45.6	19.9
40°-50°	23.6	10.3
50°-60°	9.8	4.3
60°-70°	6.1	2.6
70°-80°	3.4	1.5
80°-90°	1.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	139.6	61.0
0°-40°	185.2	80.8
0°-60°	218.6	95.4
0°-90°	229.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	229.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	263	
5°	255	24
15°	198	55
25°	133	61
35°	72	46
45°	30	24
55°	10	10
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1291777
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	263.4
1°	263.7
2°	262.8
3°	261.1
4°	258.5
5°	255.3
6°	251.2
7°	246.9
8°	241.7
9°	236.1
10°	230.6
12.5°	214.7
15°	198.1
17.5°	181.6
20°	165.4
22.5°	148.8
25°	133.2
27.5°	117.5
30°	101.8
32.5°	86.5
35°	72.2
37.5°	60.1
40°	49.0
42.5°	38.9
45°	29.6
47.5°	22.3
50°	16.8
52.5°	12.5
55°	10.2
57.5°	9.0
60°	7.8
62.5°	7.0
65°	6.1
67.5°	5.2
70°	4.6
72.5°	3.8
75°	3.2
77.5°	2.6
80°	2.0
82.5°	1.5
85°	0.9
87.5°	0.3
90°	0.0

(END OF REPORT)