

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291807

Luminaire Tested: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291807
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 467.0 lumens
Efficiency: N/A
Efficacy: 51.9 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291807
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K

Luminous Intensity Polar Plot

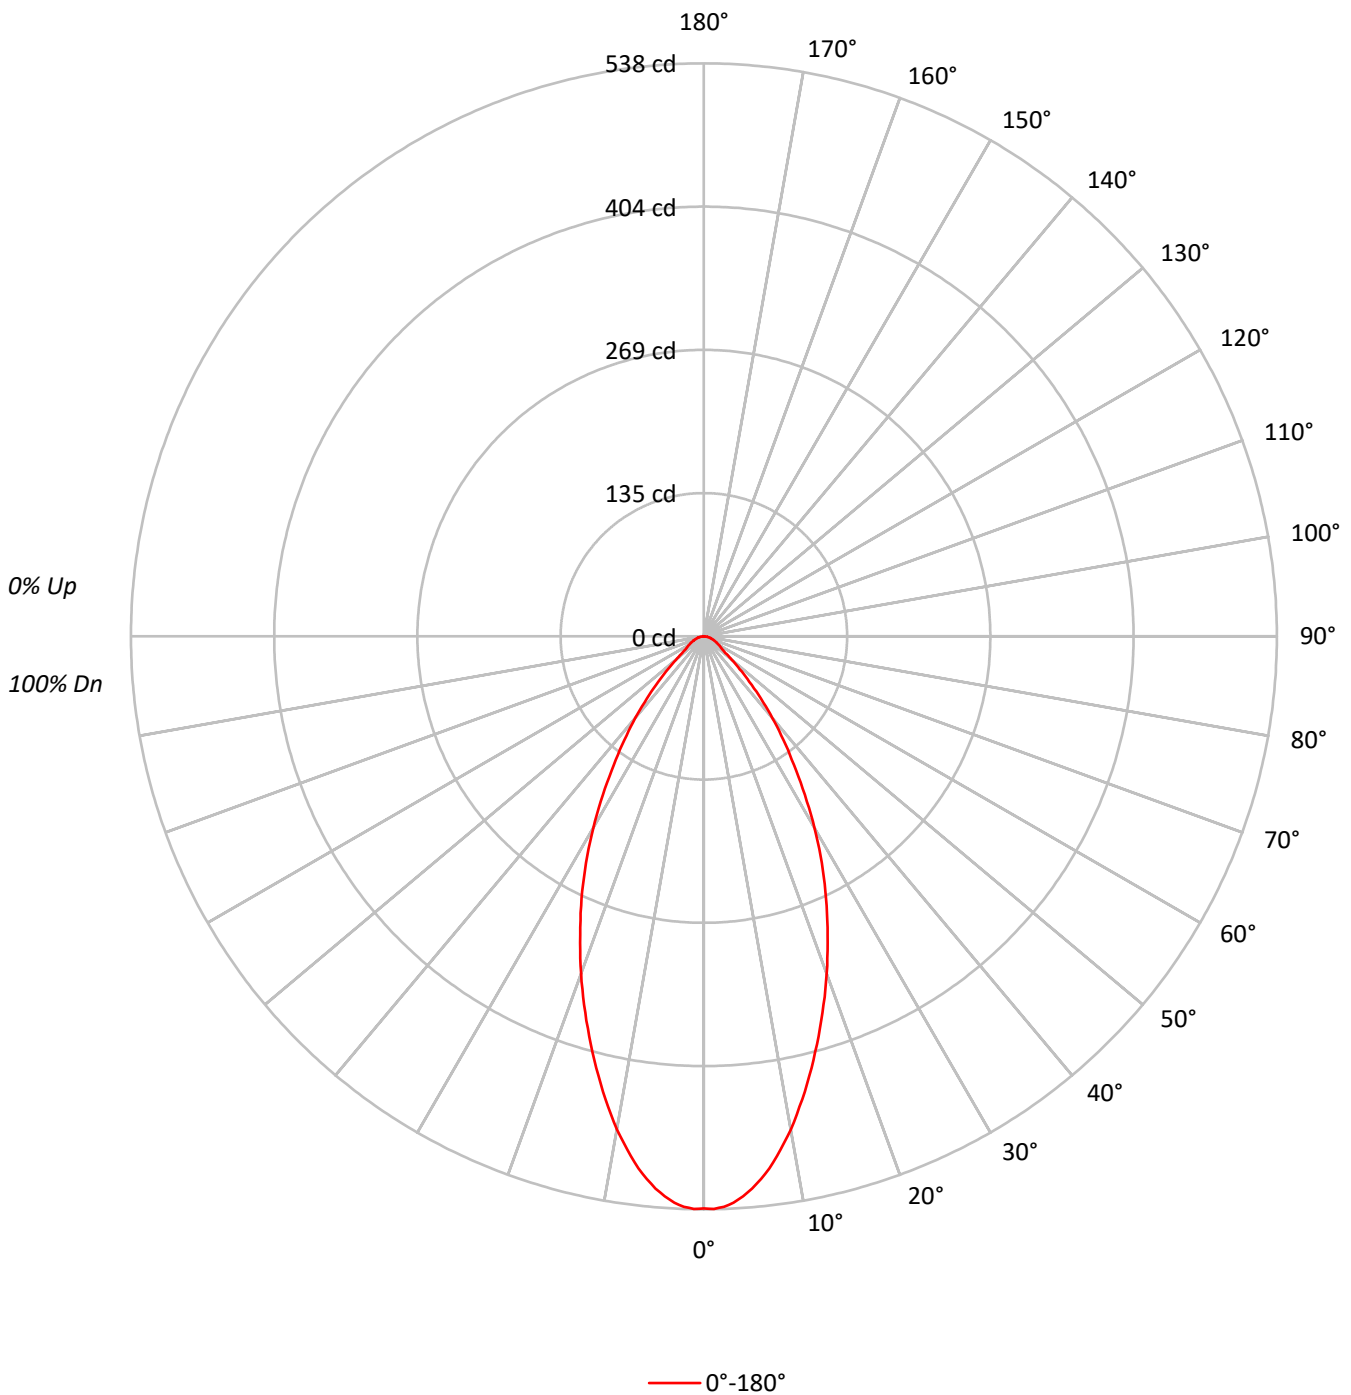



TEST NUMBER: P1291807

CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 113 | 109 | 106 | 104 | 110 | 107 | 105 | 102 | 103 | 101 | 99 | 99 | 98 | 96 | 96 | 95 | 93 | 91 | 91 | 91 | 91 |
| 2 | 106 | 100 | 96 | 92 | 104 | 99 | 95 | 91 | 95 | 92 | 89 | 92 | 90 | 87 | 90 | 87 | 85 | 83 | 83 | 83 | 83 |
| 3 | 100 | 93 | 87 | 83 | 98 | 91 | 86 | 82 | 89 | 84 | 81 | 86 | 82 | 79 | 84 | 81 | 78 | 76 | 76 | 76 | 76 |
| 4 | 94 | 86 | 80 | 75 | 92 | 85 | 79 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 78 | 75 | 72 | 70 | 70 | 70 | 70 |
| 5 | 89 | 80 | 73 | 68 | 87 | 79 | 73 | 68 | 77 | 72 | 67 | 75 | 71 | 67 | 74 | 69 | 66 | 65 | 65 | 65 | 65 |
| 6 | 84 | 74 | 68 | 63 | 83 | 73 | 67 | 63 | 72 | 66 | 62 | 70 | 66 | 62 | 69 | 65 | 61 | 60 | 60 | 60 | 60 |
| 7 | 80 | 69 | 63 | 58 | 78 | 69 | 63 | 58 | 67 | 62 | 58 | 66 | 61 | 57 | 65 | 61 | 57 | 56 | 56 | 56 | 56 |
| 8 | 76 | 65 | 59 | 54 | 74 | 65 | 58 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 61 | 57 | 53 | 52 | 52 | 52 | 52 |
| 9 | 72 | 61 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 54 | 50 | 59 | 54 | 50 | 58 | 53 | 50 | 49 | 49 | 49 | 49 |
| 10 | 68 | 58 | 52 | 48 | 67 | 57 | 51 | 47 | 57 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 46 | 46 | 46 | 46 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 117798 |
| 5° | 114594 |
| 10° | 104719 |
| 15° | 91737 |
| 20° | 78687 |
| 25° | 65713 |
| 30° | 52590 |
| 35° | 39431 |
| 40° | 28625 |
| 45° | 18700 |
| 50° | 11701 |
| 55° | 7914 |
| 60° | 7017 |
| 65° | 6434 |
| 70° | 6091 |
| 75° | 5507 |
| 80° | 5177 |
| 85° | 4529 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18700 cd/sqm



TEST NUMBER: P1291807

CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 48.0 | 10.3 |
| 10°-20° | 112.6 | 24.1 |
| 20°-30° | 124.1 | 26.6 |
| 30°-40° | 92.9 | 19.9 |
| 40°-50° | 48.2 | 10.3 |
| 50°-60° | 19.9 | 4.3 |
| 60°-70° | 12.4 | 2.6 |
| 70°-80° | 6.9 | 1.5 |
| 80°-90° | 2.0 | 0.4 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 284.7 | 61.0 |
| 0°-40° | 377.6 | 80.9 |
| 0°-60° | 445.7 | 95.4 |
| 0°-90° | 467.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 467.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 537 | |
| 5° | 521 | 48 |
| 15° | 404 | 113 |
| 25° | 272 | 124 |
| 35° | 147 | 93 |
| 45° | 60 | 48 |
| 55° | 21 | 20 |
| 65° | 12 | 12 |
| 75° | 6 | 7 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P1291807
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|-------|
| 0° | 537.2 |
| 1° | 537.8 |
| 2° | 536.0 |
| 3° | 532.5 |
| 4° | 527.1 |
| 5° | 520.6 |
| 6° | 512.3 |
| 7° | 503.5 |
| 8° | 492.8 |
| 9° | 481.6 |
| 10° | 470.3 |
| 12.5° | 437.8 |
| 15° | 404.1 |
| 17.5° | 370.4 |
| 20° | 337.2 |
| 22.5° | 303.5 |
| 25° | 271.6 |
| 27.5° | 239.6 |
| 30° | 207.7 |
| 32.5° | 176.3 |
| 35° | 147.3 |
| 37.5° | 122.5 |
| 40° | 100.0 |
| 42.5° | 79.3 |
| 45° | 60.3 |
| 47.5° | 45.6 |
| 50° | 34.3 |
| 52.5° | 25.4 |
| 55° | 20.7 |
| 57.5° | 18.3 |
| 60° | 16.0 |
| 62.5° | 14.2 |
| 65° | 12.4 |
| 67.5° | 10.6 |
| 70° | 9.5 |
| 72.5° | 7.7 |
| 75° | 6.5 |
| 77.5° | 5.3 |
| 80° | 4.1 |
| 82.5° | 3.0 |
| 85° | 1.8 |
| 87.5° | 0.6 |
| 90° | 0.0 |

(END OF REPORT)