

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291814

Luminaire Tested: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291814
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 178.0 lumens
Efficiency: N/A
Efficacy: 19.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291814
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K

Luminous Intensity Polar Plot

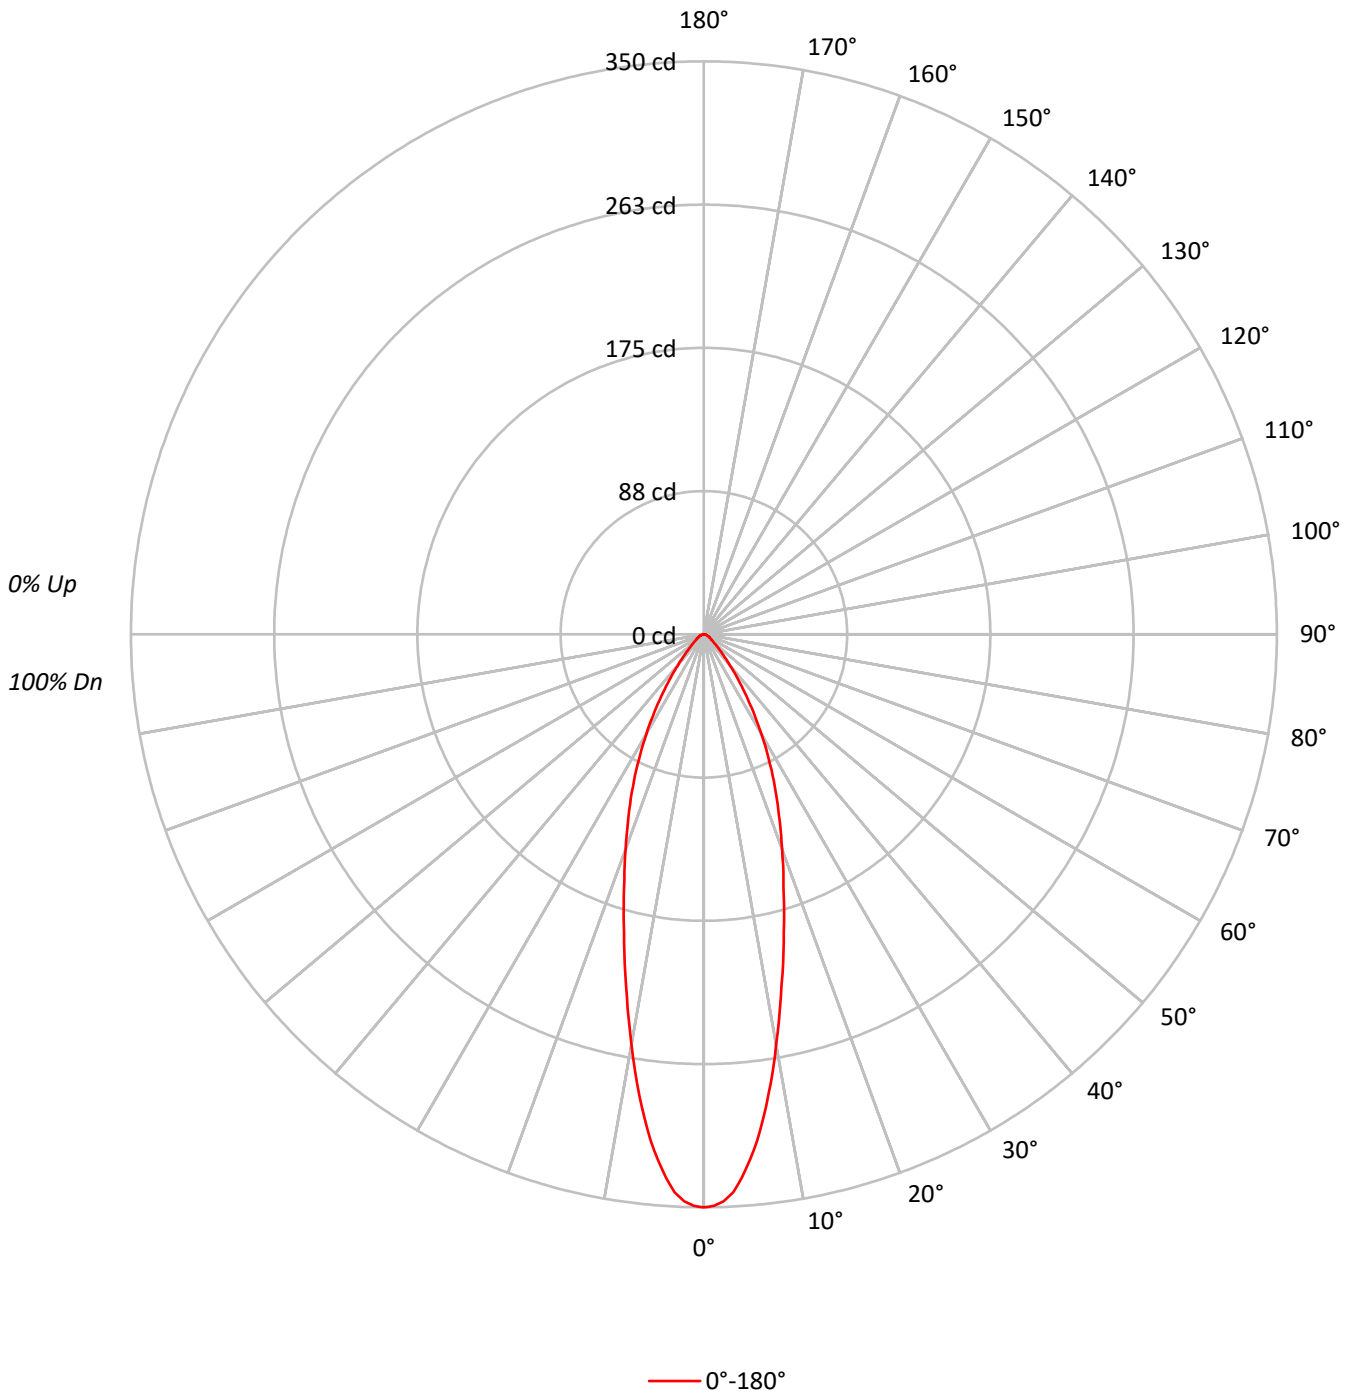



TEST NUMBER: P1291814
 CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	106	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86	86	86	86
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80	80	80
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75	75	75	75
5	93	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	79	73	69	77	72	69	76	71	68	74	71	68	66	66	66	66
7	84	75	69	65	83	74	69	65	73	68	64	72	67	64	71	67	64	62	62	62	62
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59	59	59	59
9	77	68	62	58	76	67	62	58	66	61	58	65	61	57	64	60	57	56	56	56	56
10	74	64	59	55	73	64	59	55	63	58	55	62	58	55	62	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	76748
5°	70944
10°	56646
15°	42793
20°	32576
25°	24824
30°	17775
35°	11618
40°	7128
45°	4311
50°	2866
55°	2217
60°	1886
65°	1660
70°	1475
75°	1440
80°	1137
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4311 cd/sqm



TEST NUMBER: P1291814

CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.5	16.0
10°-20°	52.7	29.6
20°-30°	46.9	26.3
30°-40°	27.8	15.6
40°-50°	11.4	6.4
50°-60°	5.3	3.0
60°-70°	3.3	1.8
70°-80°	1.7	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	128.1	72.0
0°-40°	155.9	87.6
0°-60°	172.6	97.0
0°-90°	178.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	178.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	350	
5°	322	29
15°	188	53
25°	103	47
35°	43	28
45°	14	11
55°	6	5
65°	3	3
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P1291814
CATALOG NUMBER: P3AS09R15W2N902765DE010 E3DLP1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	350.0
1°	349.2
2°	346.6
3°	341.4
4°	332.7
5°	322.3
6°	311.0
7°	297.7
8°	283.8
9°	269.7
10°	254.4
12.5°	219.4
15°	188.5
17.5°	161.9
20°	139.6
22.5°	120.0
25°	102.6
27.5°	85.8
30°	70.2
32.5°	56.1
35°	43.4
37.5°	33.2
40°	24.9
42.5°	18.5
45°	13.9
47.5°	10.7
50°	8.4
52.5°	6.9
55°	5.8
57.5°	4.9
60°	4.3
62.5°	3.8
65°	3.2
67.5°	2.9
70°	2.3
72.5°	2.0
75°	1.7
77.5°	1.2
80°	0.9
82.5°	0.6
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)