

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291899

Luminaire Tested: P3AS09R20W2N902750DE010 E3D1LI_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291899
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R20W2N902750DE010 E3D1LI_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI ,
E3D1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 663.1 lumens
Efficiency: N/A
Efficacy: 73.7 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291899
CATALOG NUMBER: P3AS09R20W2N902750DE010 E3D1LI_2700K

Luminous Intensity Polar Plot

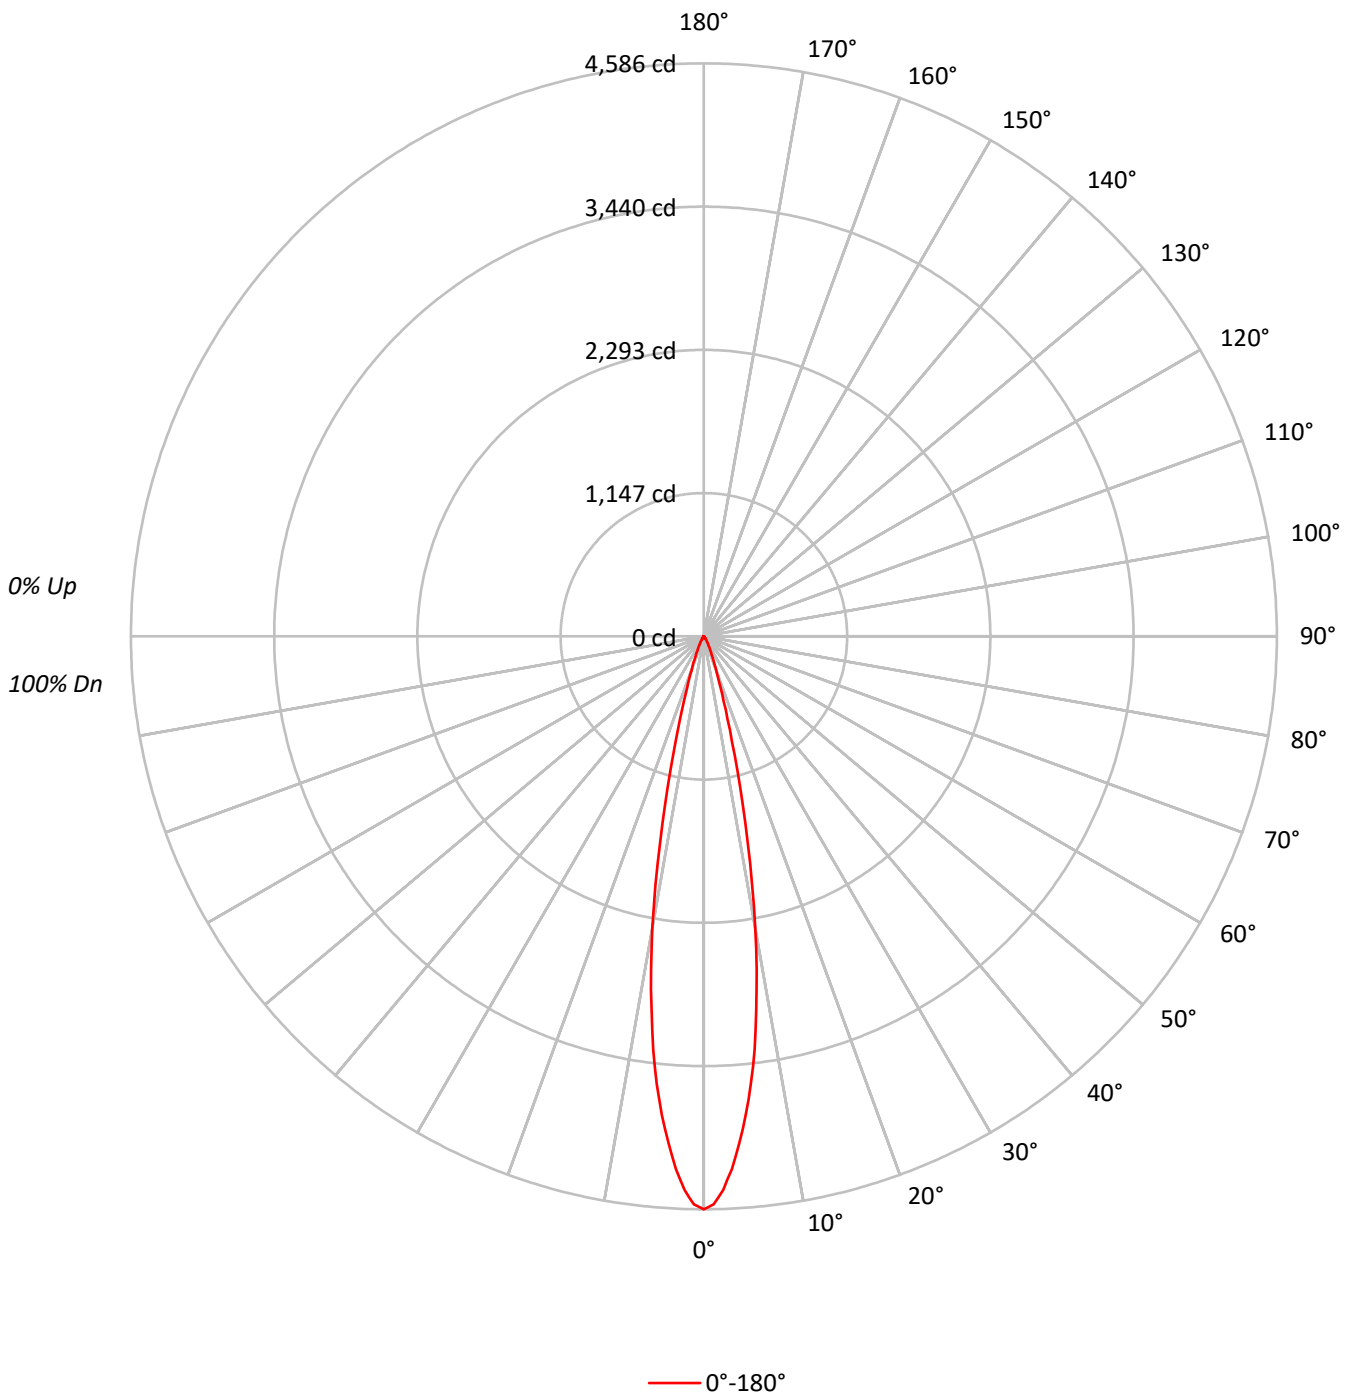



TEST NUMBER: P1291899

CATALOG NUMBER: P3AS09R20W2N902750DE010 E3D1LI_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 99 | 100 |
| 1 | 115 | 114 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99 | 97 | 97 | 97 | 97 |
| 2 | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 101 | 101 | 100 | 98 | 99 | 98 | 96 | 95 | 95 | 95 | 95 |
| 3 | 109 | 105 | 102 | 99 | 107 | 104 | 101 | 98 | 101 | 99 | 97 | 99 | 97 | 95 | 97 | 95 | 94 | 93 | 93 | 93 | 93 |
| 4 | 106 | 101 | 98 | 95 | 105 | 100 | 97 | 95 | 99 | 96 | 94 | 97 | 94 | 93 | 95 | 93 | 92 | 91 | 91 | 91 | 91 |
| 5 | 104 | 98 | 95 | 92 | 102 | 98 | 94 | 92 | 96 | 93 | 91 | 95 | 92 | 90 | 93 | 91 | 90 | 89 | 89 | 89 | 89 |
| 6 | 101 | 96 | 92 | 89 | 100 | 95 | 92 | 89 | 94 | 91 | 89 | 93 | 90 | 88 | 92 | 89 | 88 | 87 | 87 | 87 | 87 |
| 7 | 99 | 93 | 90 | 87 | 98 | 93 | 89 | 87 | 92 | 89 | 86 | 91 | 88 | 86 | 90 | 87 | 86 | 85 | 85 | 85 | 85 |
| 8 | 97 | 91 | 87 | 85 | 96 | 91 | 87 | 85 | 90 | 87 | 85 | 89 | 86 | 84 | 88 | 86 | 84 | 83 | 83 | 83 | 83 |
| 9 | 95 | 89 | 85 | 83 | 94 | 89 | 85 | 83 | 88 | 85 | 83 | 87 | 84 | 82 | 87 | 84 | 82 | 81 | 81 | 81 | 81 |
| 10 | 93 | 87 | 84 | 81 | 92 | 87 | 83 | 81 | 86 | 83 | 81 | 86 | 83 | 81 | 85 | 83 | 81 | 80 | 80 | 80 | 80 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1005709 |
| 5° | 846773 |
| 10° | 528892 |
| 15° | 197731 |
| 20° | 67859 |
| 25° | 28284 |
| 30° | 13319 |
| 35° | 5970 |
| 40° | 2834 |
| 45° | 1458 |
| 50° | 546 |
| 55° | 115 |
| 60° | 132 |
| 65° | 156 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1458 cd/sqm



TEST NUMBER: P1291899

CATALOG NUMBER: P3AS09R20W2N902750DE010 E3D1LI_2700K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 319.9 | 48.2 |
| 10°-20° | 263.5 | 39.7 |
| 20°-30° | 59.9 | 9.0 |
| 30°-40° | 15.3 | 2.3 |
| 40°-50° | 3.8 | 0.6 |
| 50°-60° | 0.5 | 0.1 |
| 60°-70° | 0.2 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 643.3 | 97.0 |
| 0°-40° | 658.5 | 99.3 |
| 0°-60° | 662.9 | 100.0 |
| 0°-90° | 663.1 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 663.1 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 4586 | |
| 5° | 3847 | 320 |
| 15° | 871 | 264 |
| 25° | 117 | 60 |
| 35° | 22 | 15 |
| 45° | 5 | 4 |
| 55° | 0 | 1 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P1291899

CATALOG NUMBER: P3AS09R20W2N902750DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 4586.4 |
| 1° | 4547.6 |
| 2° | 4433.0 |
| 3° | 4268.6 |
| 4° | 4067.0 |
| 5° | 3846.9 |
| 6° | 3601.6 |
| 7° | 3331.0 |
| 8° | 3015.3 |
| 9° | 2702.4 |
| 10° | 2375.3 |
| 11° | 2027.1 |
| 12° | 1679.5 |
| 13° | 1385.0 |
| 14° | 1103.5 |
| 15° | 871.0 |
| 16° | 687.5 |
| 17° | 542.3 |
| 18° | 435.8 |
| 19° | 354.4 |
| 20° | 290.8 |
| 21° | 243.2 |
| 22° | 203.0 |
| 23° | 168.8 |
| 24° | 140.8 |
| 25° | 116.9 |
| 27.5° | 76.5 |
| 30° | 52.6 |
| 32.5° | 32.4 |
| 35° | 22.3 |
| 37.5° | 14.3 |
| 40° | 9.9 |
| 42.5° | 6.7 |
| 45° | 4.7 |
| 47.5° | 3.1 |
| 50° | 1.6 |
| 52.5° | 0.8 |
| 55° | 0.3 |
| 57.5° | 0.3 |
| 60° | 0.3 |
| 62.5° | 0.3 |
| 65° | 0.3 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |



TEST NUMBER: P1291899
CATALOG NUMBER: P3AS09R20W2N902750DE010 E3D1LI_2700K

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)