

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292185

Luminaire Tested: P3AS09R25W2N902750DE010 E3D1LI\_2700K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292185  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R25W2N902750DE010 E3D1LI\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,  
E3D1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 714.0 lumens  
Efficiency: N/A  
Efficacy: 79.3 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292185  
CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1LI\_2700K

### Luminous Intensity Polar Plot

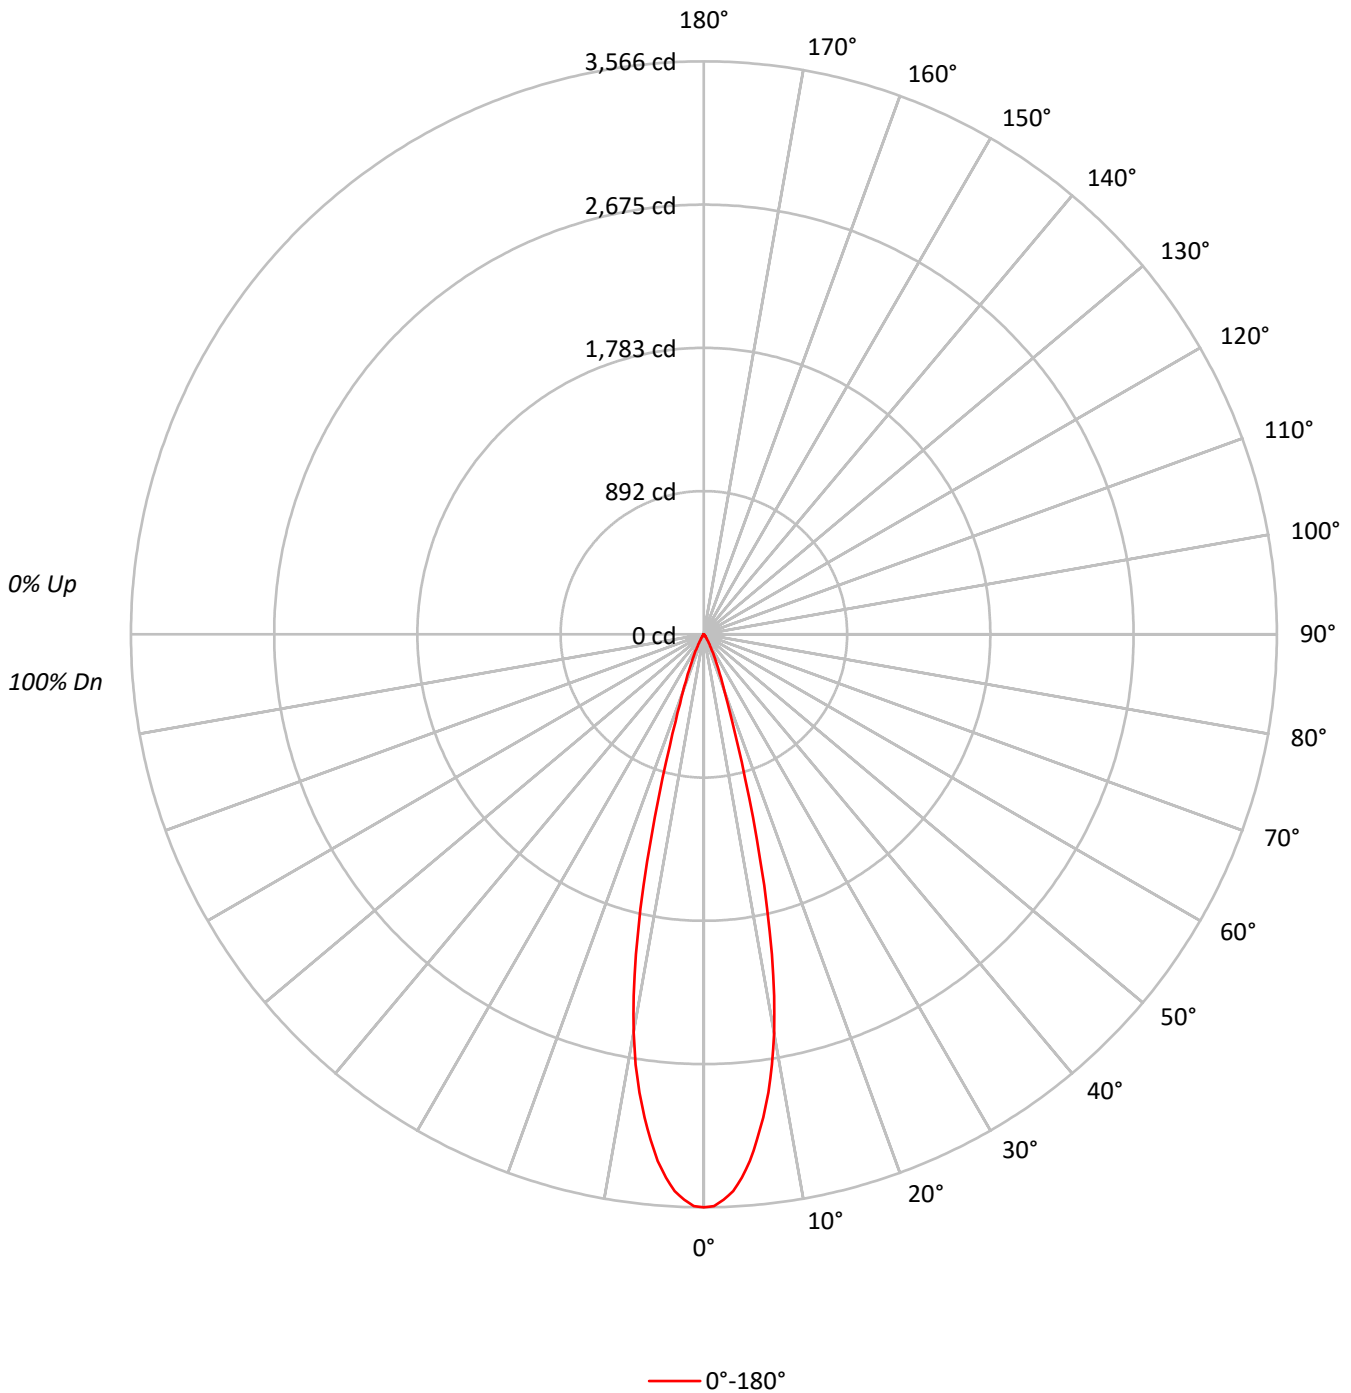



TEST NUMBER: P1292185

CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1LI\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	94	94	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	106	101	97	94	104	100	96	94	98	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	90	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	87	85	90	87	84	89	86	84	88	86	84	83	83	83	83
8	95	89	85	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	86	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	79	90	84	81	79	84	81	78	83	80	78	83	80	78	77	77	77	77

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	781955
5°	724387
10°	560466
15°	267697
20°	88254
25°	37212
30°	14433
35°	6237
40°	2061
45°	961
50°	341
55°	191
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 961 cd/sqm



TEST NUMBER: P1292185

CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1LI\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	289.3	40.5
10°-20°	329.0	46.1
20°-30°	76.5	10.7
30°-40°	16.0	2.2
40°-50°	2.6	0.4
50°-60°	0.4	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	694.7	97.3
0°-40°	710.8	99.5
0°-60°	713.8	100.0
0°-90°	714.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	714.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3566	
5°	3291	289
15°	1179	329
25°	154	76
35°	23	16
45°	3	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1292185

CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1LI\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3566.0
1°	3558.8
2°	3521.8
3°	3469.7
4°	3390.3
5°	3290.9
6°	3163.2
7°	3029.6
8°	2879.8
9°	2710.7
10°	2517.1
11°	2292.6
12°	2035.0
13°	1752.9
14°	1457.7
15°	1179.2
16°	932.7
17°	726.7
18°	571.6
19°	457.2
20°	378.2
21°	316.1
22°	265.3
23°	221.6
24°	185.4
25°	153.8
27.5°	91.1
30°	57.0
32.5°	36.5
35°	23.3
37.5°	14.0
40°	7.2
42.5°	4.7
45°	3.1
47.5°	1.8
50°	1.0
52.5°	0.5
55°	0.5
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.0
72.5°	0.0



TEST NUMBER: P1292185  
CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1LI\_2700K

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)