

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292202

Luminaire Tested: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292202  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R25W2N902750DE010 E3D1WMH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3500K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 800.0 lumens  
Efficiency: N/A  
Efficacy: 88.9 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292202  
CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

### Luminous Intensity Polar Plot

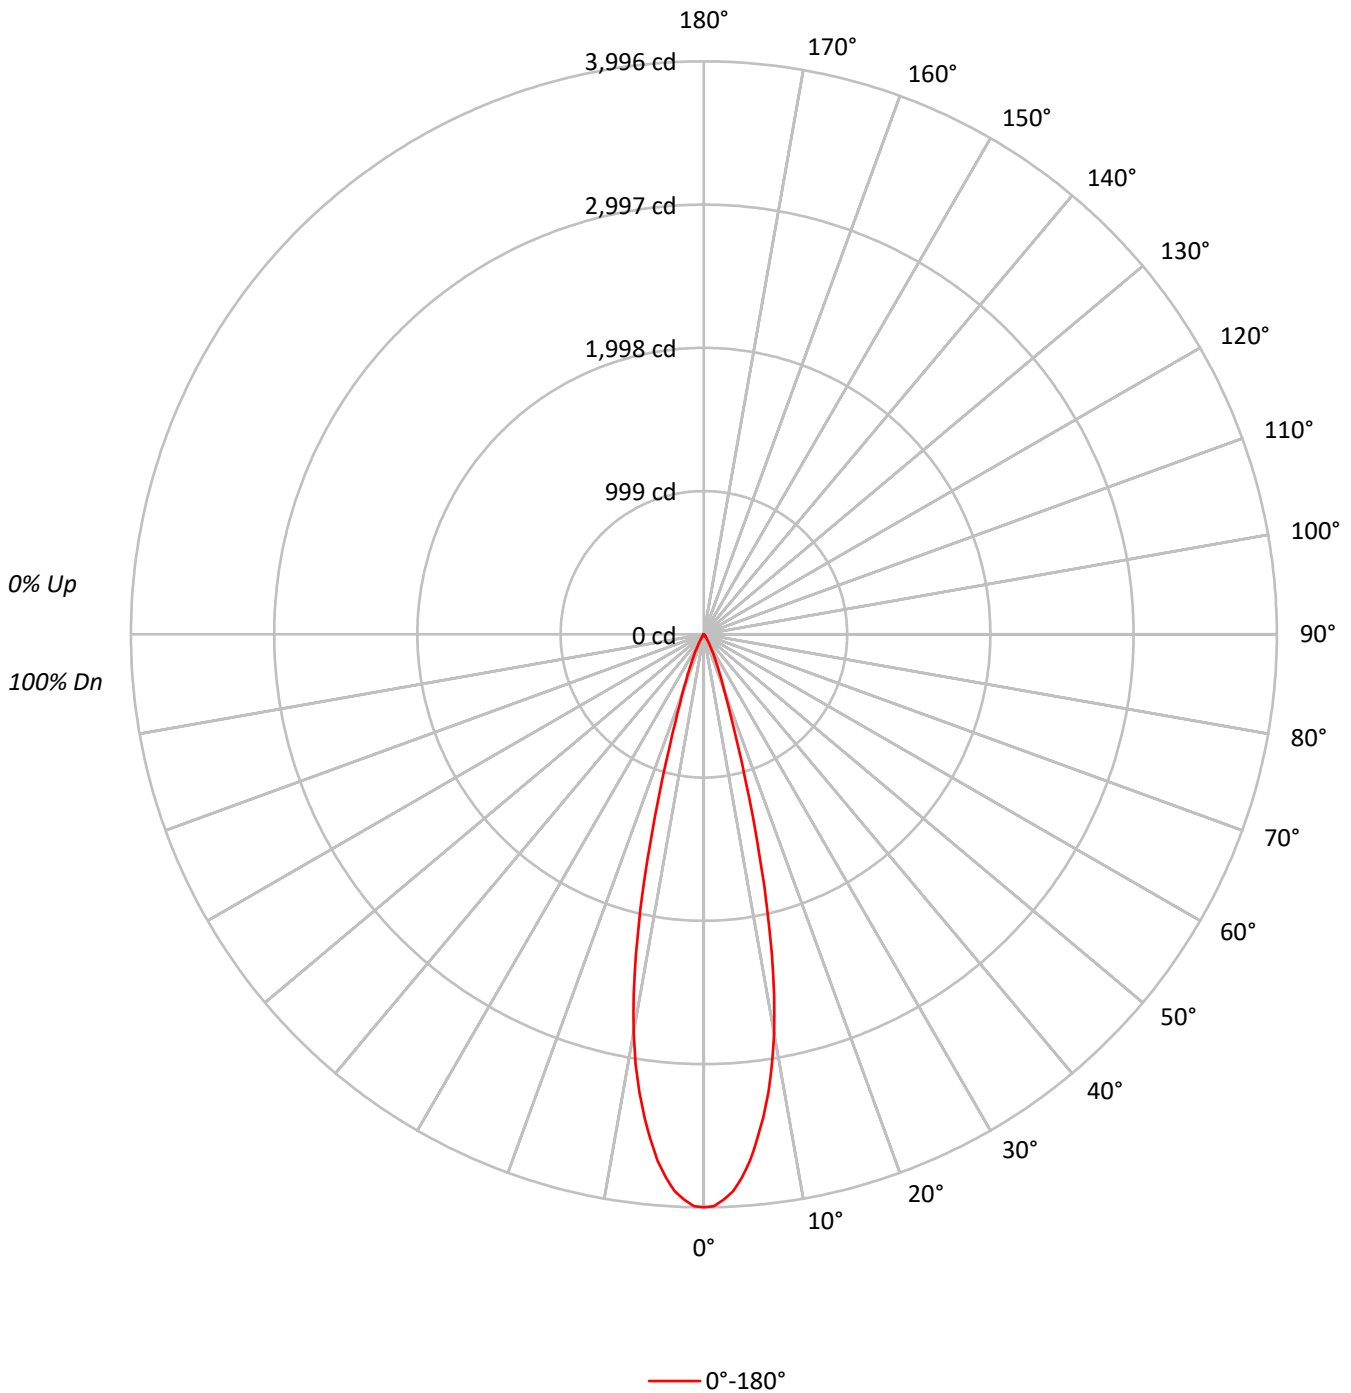



TEST NUMBER: P1292202

CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	106	101	97	94	104	100	96	94	98	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	91	101	96	93	90	95	92	90	93	91	89	92	90	88	87	87	87	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	85	85	85	85
7	98	92	88	85	97	91	87	85	90	87	84	89	86	84	88	86	84	83	83	83	83
8	95	89	85	83	94	89	85	83	88	85	82	87	84	82	86	84	82	81	81	81	81
9	93	87	83	81	92	86	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	79	90	84	81	79	84	81	78	83	80	78	83	80	78	77	77	77	77

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	876158
5°	811620
10°	627955
15°	299934
20°	98895
25°	41688
30°	16154
35°	6987
40°	2319
45°	1085
50°	409
55°	229
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1085 cd/sqm



TEST NUMBER: P1292202

CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	324.1	40.5
10°-20°	368.6	46.1
20°-30°	85.7	10.7
30°-40°	18.0	2.2
40°-50°	2.9	0.4
50°-60°	0.5	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	778.4	97.3
0°-40°	796.4	99.5
0°-60°	799.8	100.0
0°-90°	800.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3996	
5°	3687	324
15°	1321	369
25°	172	86
35°	26	18
45°	4	3
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1292202  
CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3995.6
1°	3987.4
2°	3946.0
3°	3887.7
4°	3798.6
5°	3687.2
6°	3544.2
7°	3394.6
8°	3226.6
9°	3037.2
10°	2820.2
11°	2568.8
12°	2280.2
13°	1964.0
14°	1633.3
15°	1321.2
16°	1045.1
17°	814.2
18°	640.4
19°	512.2
20°	423.8
21°	354.2
22°	297.3
23°	248.3
24°	207.7
25°	172.3
27.5°	102.1
30°	63.8
32.5°	40.9
35°	26.1
37.5°	15.7
40°	8.1
42.5°	5.2
45°	3.5
47.5°	2.0
50°	1.2
52.5°	0.6
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.0
72.5°	0.0



TEST NUMBER: P1292202  
CATALOG NUMBER: P3AS09R25W2N902750DE010 E3D1WMH\_3500K

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)