

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292366

Luminaire Tested: P3AS09R25W2N902765DE010 E3D1WH_3500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292366
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R25W2N902765DE010 E3D1WH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3500K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 800.0 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292366
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3D1WH_3500K

Luminous Intensity Polar Plot

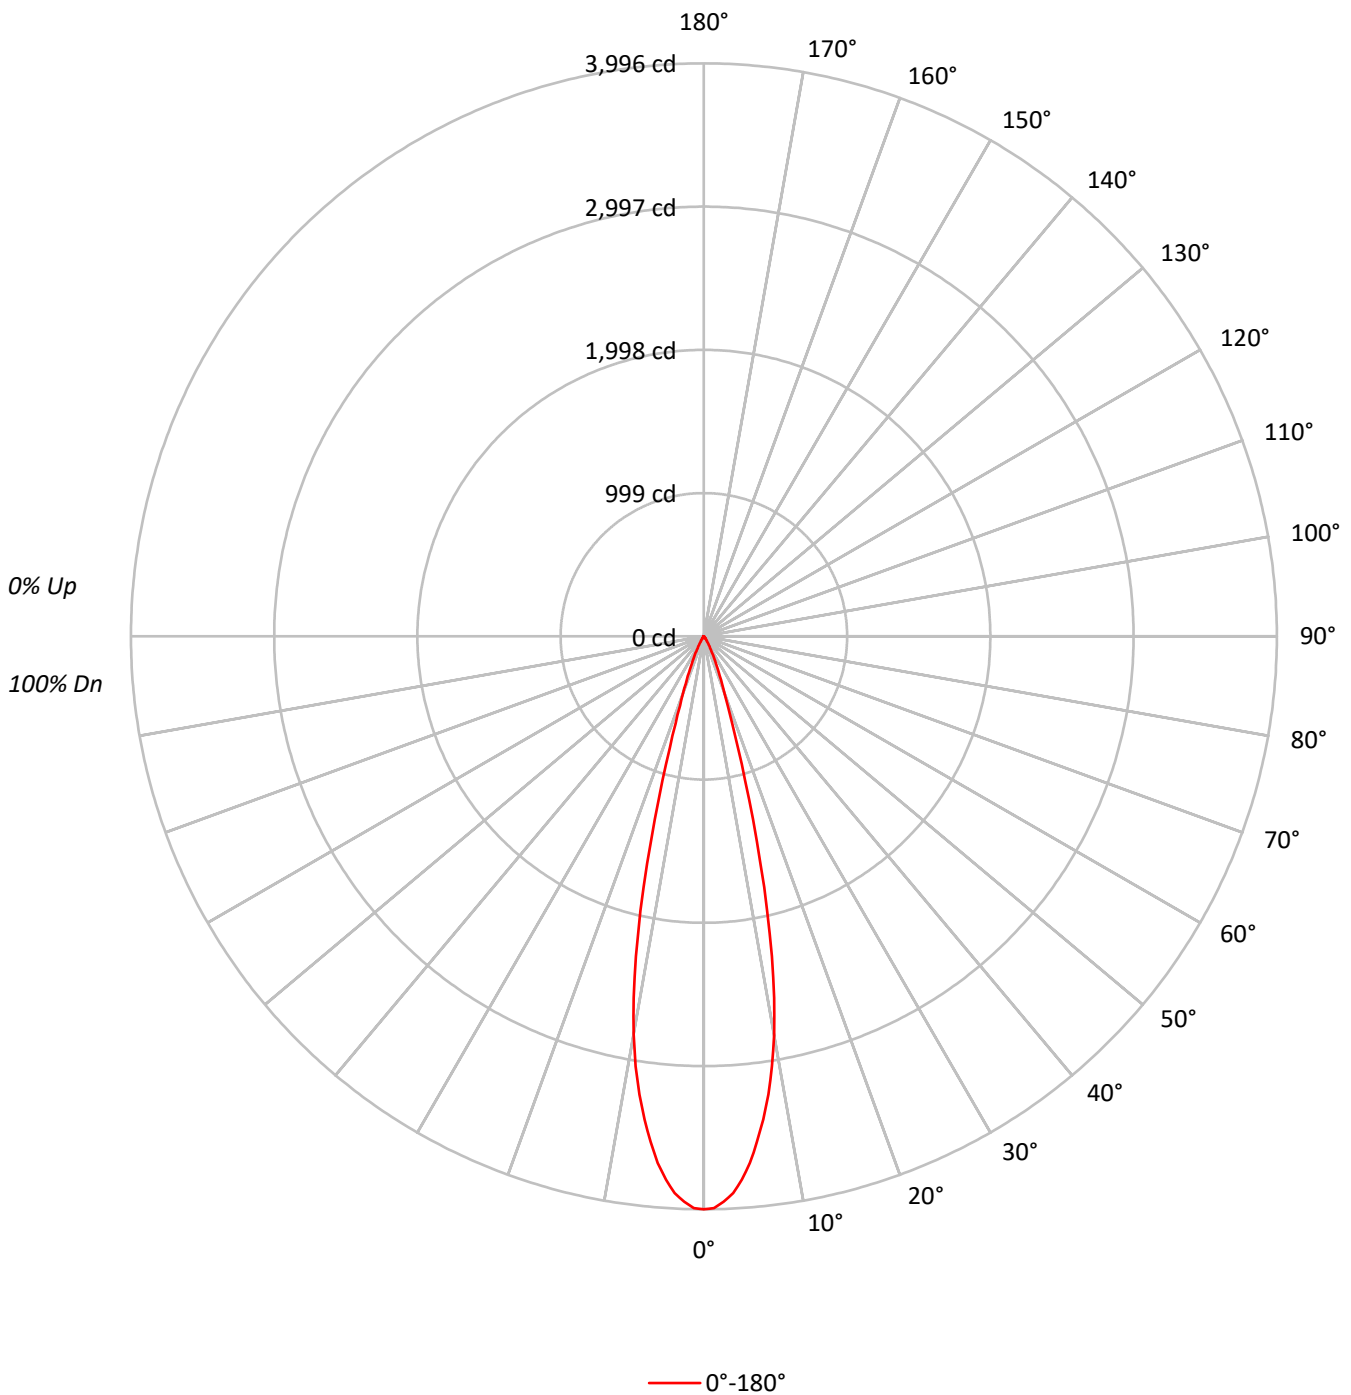



TEST NUMBER: P1292366

CATALOG NUMBER: P3AS09R25W2N902765DE010 E3D1WH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.1	40.5
10°-20°	368.6	46.1
20°-30°	85.7	10.7
30°-40°	18.0	2.2
40°-50°	2.9	0.4
50°-60°	0.5	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	778.4	97.3
0°-40°	796.4	99.5
0°-60°	799.8	100.0
0°-90°	800.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3996	
5°	3687	324
15°	1321	369
25°	172	86
35°	26	18
45°	4	3
55°	1	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1292366
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3D1WH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	3995.6
1°	3987.4
2°	3946.0
3°	3887.7
4°	3798.6
5°	3687.2
6°	3544.2
7°	3394.6
8°	3226.6
9°	3037.2
10°	2820.2
11°	2568.8
12°	2280.2
13°	1964.0
14°	1633.3
15°	1321.2
16°	1045.1
17°	814.2
18°	640.4
19°	512.2
20°	423.8
21°	354.2
22°	297.3
23°	248.3
24°	207.7
25°	172.3
27.5°	102.1
30°	63.8
32.5°	40.9
35°	26.1
37.5°	15.7
40°	8.1
42.5°	5.2
45°	3.5
47.5°	2.0
50°	1.2
52.5°	0.6
55°	0.6
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.0
72.5°	0.0



TEST NUMBER: P1292366
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3D1WH_3500K

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)