

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292437

Luminaire Tested: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292437
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R25W2N902765DE010 E3DLD1WH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 468.0 lumens
Efficiency: N/A
Efficacy: 52.0 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292437
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

Luminous Intensity Polar Plot

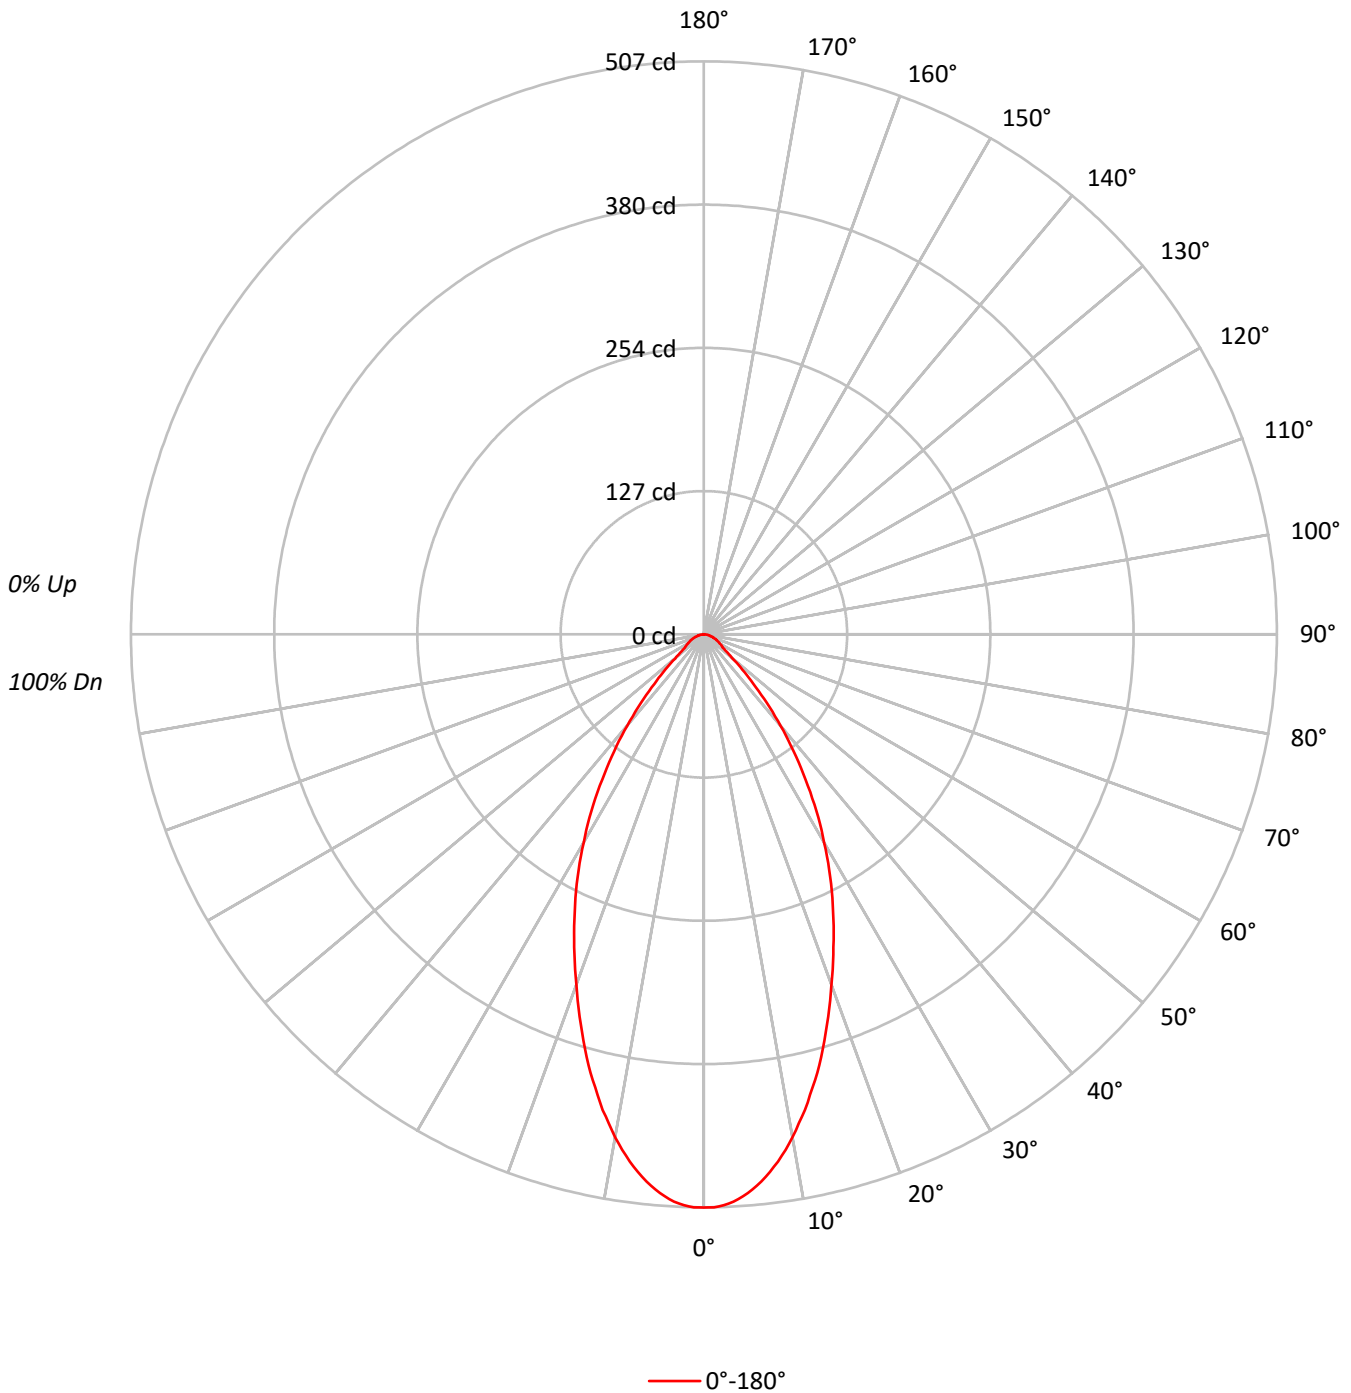



TEST NUMBER: P1292437

CATALOG NUMBER: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83			83
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	83	80	78	76			76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70			70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64			64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59			59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55			55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51			51
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48			48
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	111219
5°	108562
10°	100599
15°	89603
20°	77007
25°	65447
30°	53882
35°	41974
40°	30199
45°	19165
50°	11326
55°	7799
60°	7149
65°	6641
70°	5963
75°	5422
80°	5177
85°	4277

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19165 cd/sqm



TEST NUMBER: P1292437

CATALOG NUMBER: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.7	9.8
10°-20°	109.6	23.4
20°-30°	123.8	26.5
30°-40°	97.9	20.9
40°-50°	49.5	10.6
50°-60°	19.8	4.2
60°-70°	12.7	2.7
70°-80°	7.0	1.5
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	279.1	59.6
0°-40°	377.1	80.6
0°-60°	446.3	95.4
0°-90°	468.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	468.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	507	
5°	493	46
15°	395	110
25°	270	124
35°	157	98
45°	62	49
55°	20	20
65°	13	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1292437
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	507.2
1°	507.2
2°	505.5
3°	502.6
4°	498.5
5°	493.2
6°	486.8
7°	479.3
8°	471.1
9°	461.8
10°	451.8
11°	440.8
12°	430.3
13°	418.0
14°	406.4
15°	394.7
17.5°	362.1
20°	330.0
22.5°	299.7
25°	270.5
27.5°	242.0
30°	212.8
32.5°	185.4
35°	156.8
37.5°	130.6
40°	105.5
42.5°	82.2
45°	61.8
47.5°	46.1
50°	33.2
52.5°	25.1
55°	20.4
57.5°	18.7
60°	16.3
62.5°	14.6
65°	12.8
67.5°	11.1
70°	9.3
72.5°	8.2
75°	6.4
77.5°	5.2
80°	4.1
82.5°	2.9
85°	1.7
87.5°	0.6



TEST NUMBER: P1292437
CATALOG NUMBER: P3AS09R25W2N902765DE010 E3DLD1WH_3000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)