

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292510

Luminaire Tested: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292510  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,  
E3CB1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 753.0 lumens  
Efficiency: N/A  
Efficacy: 83.7 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292510  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

### Luminous Intensity Polar Plot

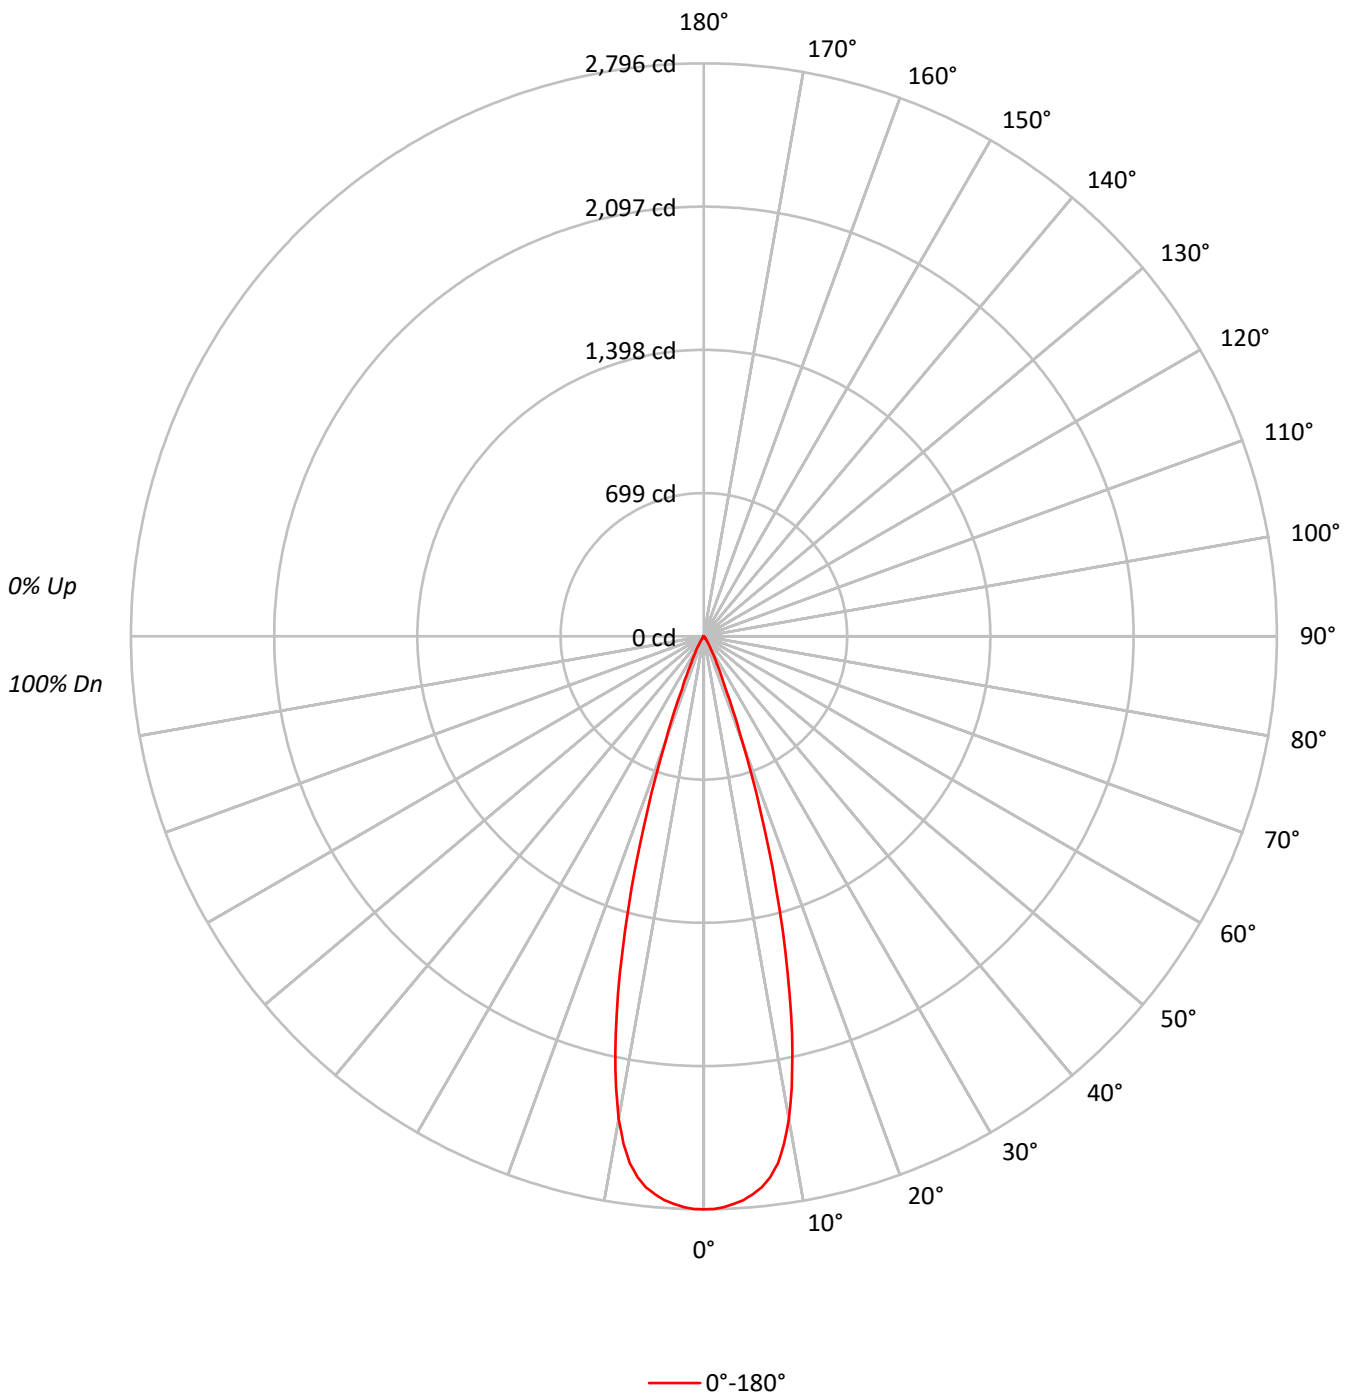



TEST NUMBER: P1292510  
 CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	93	92
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	91	90	89
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	88	87	86
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	86	85	84
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	83	82	81
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	80	79
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	77
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	76	75	74
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	74	73	72

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	613196
5°	601605
10°	532566
15°	337414
20°	128088
25°	37913
30°	14964
35°	4604
40°	2032
45°	744
50°	614
55°	459
60°	526
65°	623
70°	385
75°	508
80°	758
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 758 cd/sqm



TEST NUMBER: P1292510

CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	251.2	33.4
10°-20°	391.6	52.0
20°-30°	90.9	12.1
30°-40°	14.1	1.9
40°-50°	2.4	0.3
50°-60°	1.1	0.2
60°-70°	1.0	0.1
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	733.7	97.4
0°-40°	747.8	99.3
0°-60°	751.4	99.8
0°-90°	753.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	753.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2796	
5°	2733	251
15°	1486	392
25°	157	91
35°	17	14
45°	2	2
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1292510  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2796.4
1°	2794.6
2°	2786.9
3°	2773.9
4°	2757.4
5°	2733.1
6°	2702.9
7°	2658.0
8°	2596.5
9°	2506.0
10°	2391.8
11°	2244.6
12°	2078.4
13°	1893.8
14°	1691.0
15°	1486.3
17.5°	972.4
20°	548.9
22.5°	280.3
25°	156.7
27.5°	96.4
30°	59.1
32.5°	31.9
35°	17.2
37.5°	11.2
40°	7.1
42.5°	4.1
45°	2.4
47.5°	1.8
50°	1.8
52.5°	1.2
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1292510  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CB1MMS\_4000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)