

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292522

Luminaire Tested: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292522  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,  
E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 673.0 lumens  
Efficiency: N/A  
Efficacy: 74.8 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292522  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

### Luminous Intensity Polar Plot

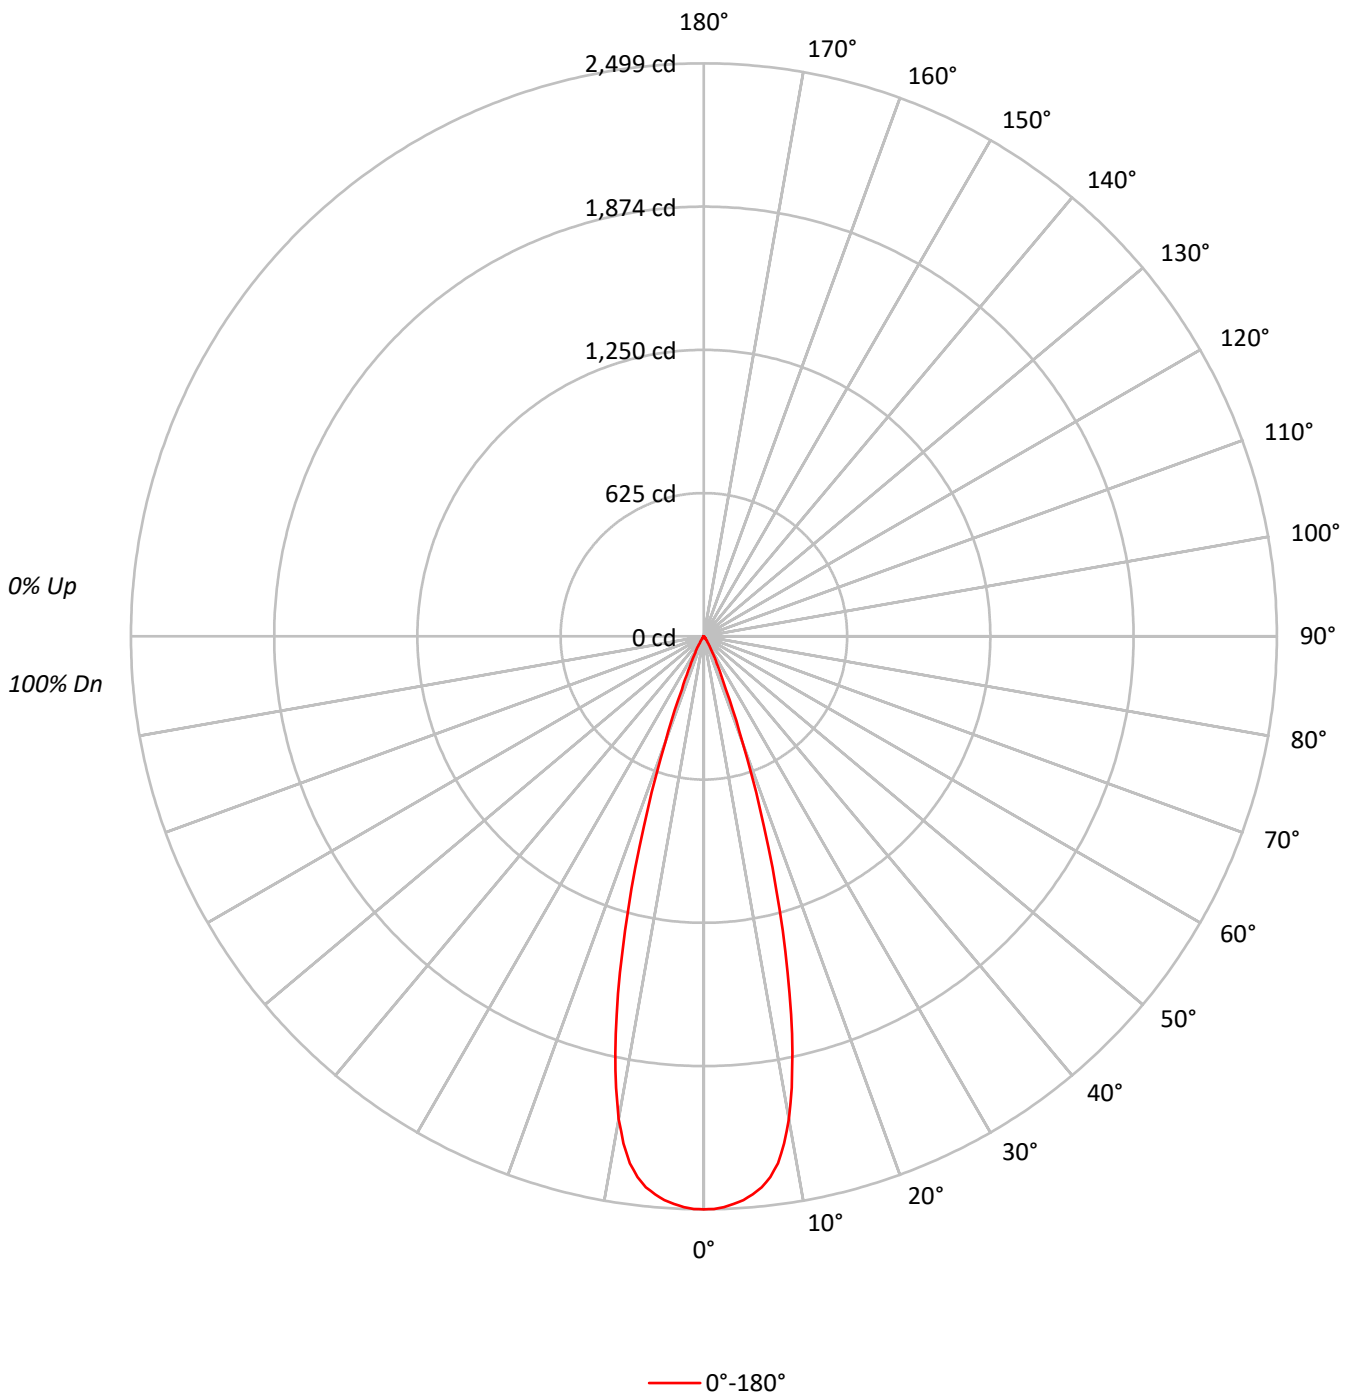



TEST NUMBER: P1292522  
 CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	98	96	95	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	95	94	92	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	94	92	93	91	89	91
4	105	100	96	93	103	99	95	92	97	94	91	95	92	90	93	91	89	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	87	91	88	87	85
6	99	93	89	86	98	92	88	86	91	88	85	90	87	85	89	86	84	89	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79
9	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	79	77	82	79	77	77
10	89	83	79	76	88	82	78	76	82	78	76	81	78	76	80	77	75	80	77	75	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	548048
5°	537683
10°	475988
15°	301568
20°	114483
25°	33897
30°	13394
35°	4096
40°	1803
45°	651
50°	546
55°	421
60°	482
65°	571
70°	321
75°	424
80°	631
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 651 cd/sqm



TEST NUMBER: P1292522

CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	224.6	33.4
10°-20°	350.0	52.0
20°-30°	81.3	12.1
30°-40°	12.6	1.9
40°-50°	2.1	0.3
50°-60°	1.0	0.2
60°-70°	0.9	0.1
70°-80°	0.5	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	655.8	97.4
0°-40°	668.4	99.3
0°-60°	671.5	99.8
0°-90°	673.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	673.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2499	
5°	2443	225
15°	1328	350
25°	140	81
35°	15	13
45°	2	2
55°	1	1
65°	1	1
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P1292522  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2499.3
1°	2497.7
2°	2490.8
3°	2479.2
4°	2464.4
5°	2442.7
6°	2415.8
7°	2375.6
8°	2320.6
9°	2239.8
10°	2137.7
11°	2006.1
12°	1857.6
13°	1692.6
14°	1511.3
15°	1328.4
17.5°	869.0
20°	490.6
22.5°	250.6
25°	140.1
27.5°	86.2
30°	52.9
32.5°	28.5
35°	15.3
37.5°	10.0
40°	6.3
42.5°	3.7
45°	2.1
47.5°	1.6
50°	1.6
52.5°	1.1
55°	1.1
57.5°	1.1
60°	1.1
62.5°	1.1
65°	1.1
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1292522  
CATALOG NUMBER: P3AS09R30W2N902750DE010 E3CD1MMS\_2700K

CANDELA DISTRIBUTION (continued):

90° |  $\frac{0^\circ}{0.0}$

(END OF REPORT)