

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292728

Luminaire Tested: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292728
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R30W2N902765DE010 E3DL1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 274.0 lumens
Efficiency: N/A
Efficacy: 30.4 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292728
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

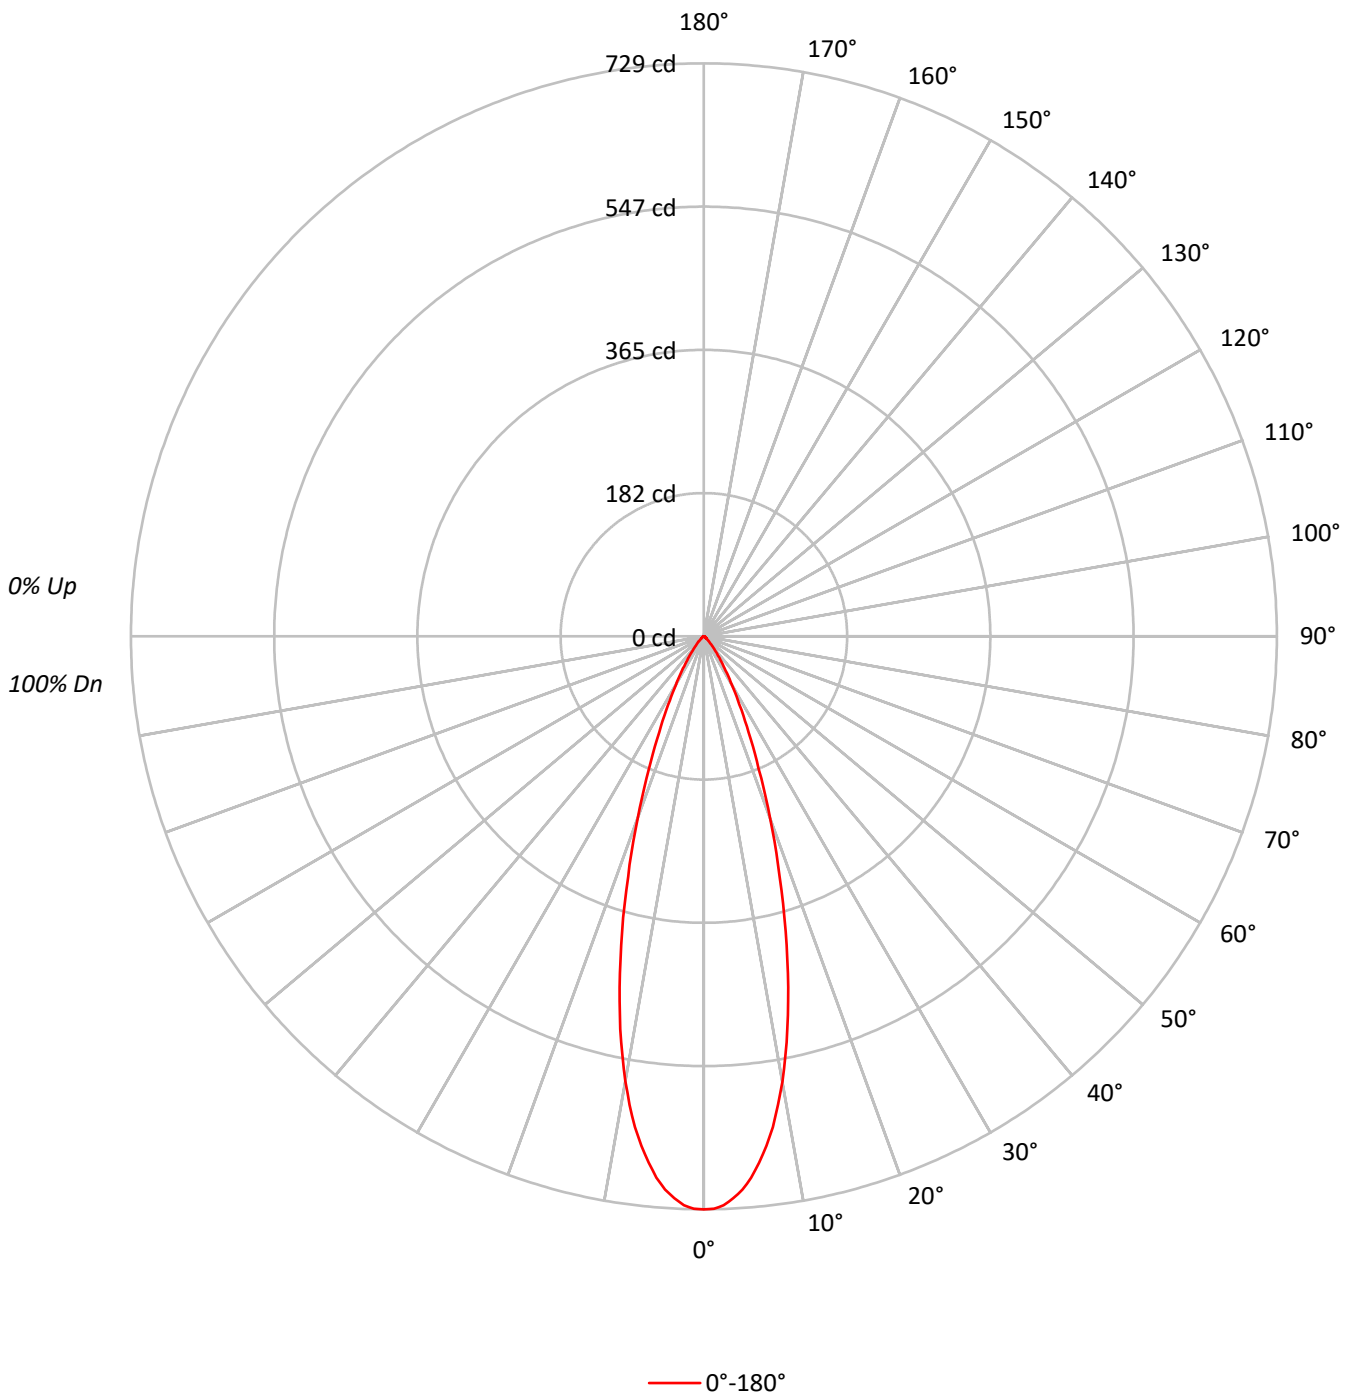



TEST NUMBER: P1292728

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	75	75	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	78	75	73	71	71	71	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	69	69	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	66	66	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	63	63	63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	159878
5°	152190
10°	128009
15°	92305
20°	57265
25°	32566
30°	18079
35°	9851
40°	5181
45°	2822
50°	1501
55°	994
60°	921
65°	934
70°	833
75°	678
80°	631
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2822 cd/sqm



TEST NUMBER: P1292728

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.3	22.7
10°-20°	110.7	40.4
20°-30°	64.0	23.3
30°-40°	24.3	8.9
40°-50°	7.5	2.7
50°-60°	2.5	0.9
60°-70°	1.7	0.6
70°-80°	0.9	0.3
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	236.9	86.4
0°-40°	261.1	95.3
0°-60°	271.1	98.9
0°-90°	274.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	274.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	729	
5°	691	62
15°	407	111
25°	135	64
35°	37	24
45°	9	7
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1292728

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	729.1
1°	728.6
2°	724.2
3°	715.9
4°	705.6
5°	691.4
6°	673.2
7°	653.0
8°	630.5
9°	603.6
10°	574.9
11°	543.8
12°	510.9
13°	476.5
14°	441.6
15°	406.6
17.5°	320.7
20°	245.4
22.5°	182.0
25°	134.6
27.5°	97.8
30°	71.4
32.5°	51.5
35°	36.8
37.5°	25.6
40°	18.1
42.5°	12.7
45°	9.1
47.5°	6.2
50°	4.4
52.5°	3.1
55°	2.6
57.5°	2.3
60°	2.1
62.5°	1.8
65°	1.8
67.5°	1.6
70°	1.3
72.5°	1.0
75°	0.8
77.5°	0.8
80°	0.5
82.5°	0.5
85°	0.3
87.5°	0.0



TEST NUMBER: P1292728
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)