

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292731

Luminaire Tested: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292731  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 4000K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 307.0 lumens  
Efficiency: N/A  
Efficacy: 34.1 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292731  
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

### Luminous Intensity Polar Plot

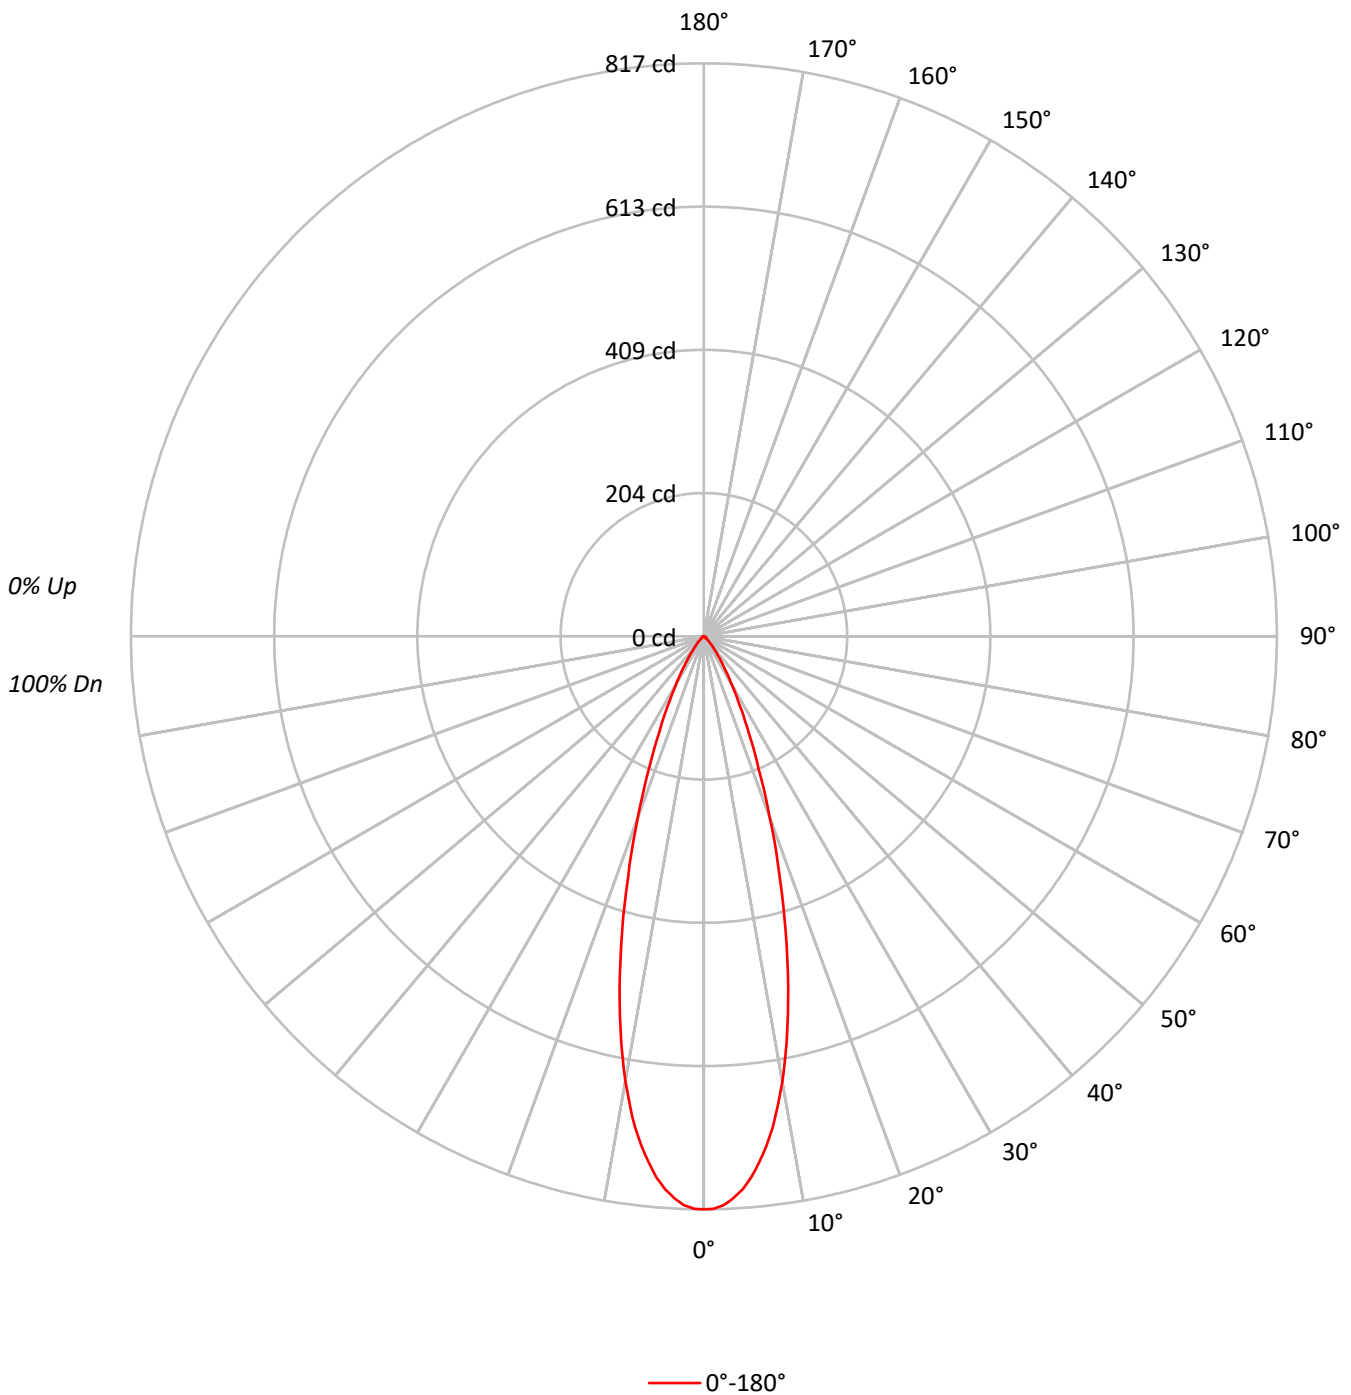



TEST NUMBER: P1292731

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20		
RC	80				70				50				30				10		0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10		0
RCR																			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97		95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92		90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87		86
4	101	95	90	86	99	94	89	86	92	88	85	90	87	84	88	85	83		82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79		78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76		75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	78	75	73		71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70		69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67		66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65		63

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	179152
5°	170504
10°	143418
15°	103429
20°	64149
25°	36486
30°	20256
35°	11029
40°	5811
45°	3163
50°	1672
55°	1109
60°	1009
65°	1038
70°	962
75°	763
80°	758
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3163 cd/sqm



TEST NUMBER: P1292731

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	69.7	22.7
10°-20°	124.0	40.4
20°-30°	71.7	23.3
30°-40°	27.2	8.9
40°-50°	8.4	2.7
50°-60°	2.8	0.9
60°-70°	1.9	0.6
70°-80°	1.1	0.3
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	265.4	86.4
0°-40°	292.6	95.3
0°-60°	303.7	98.9
0°-90°	307.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	307.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	817	
5°	775	70
15°	456	124
25°	151	72
35°	41	27
45°	10	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1292731  
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	817.0
1°	816.4
2°	811.5
3°	802.2
4°	790.6
5°	774.6
6°	754.3
7°	731.7
8°	706.5
9°	676.3
10°	644.1
11°	609.3
12°	572.5
13°	533.9
14°	494.8
15°	455.6
17.5°	359.3
20°	274.9
22.5°	203.9
25°	150.8
27.5°	109.6
30°	80.0
32.5°	57.7
35°	41.2
37.5°	28.7
40°	20.3
42.5°	14.2
45°	10.2
47.5°	7.0
50°	4.9
52.5°	3.5
55°	2.9
57.5°	2.6
60°	2.3
62.5°	2.0
65°	2.0
67.5°	1.7
70°	1.5
72.5°	1.2
75°	0.9
77.5°	0.9
80°	0.6
82.5°	0.6
85°	0.3
87.5°	0.0



TEST NUMBER: P1292731  
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DL1GPH\_4000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)