

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292813

Luminaire Tested: P3AS09R30W2N902765DE010 E3DLP1LI_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292813
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R30W2N902765DE010 E3DLP1LI_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,
E3DLP1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 376.0 lumens
Efficiency: N/A
Efficacy: 41.8 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292813
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DLP1LI_3000K

Luminous Intensity Polar Plot

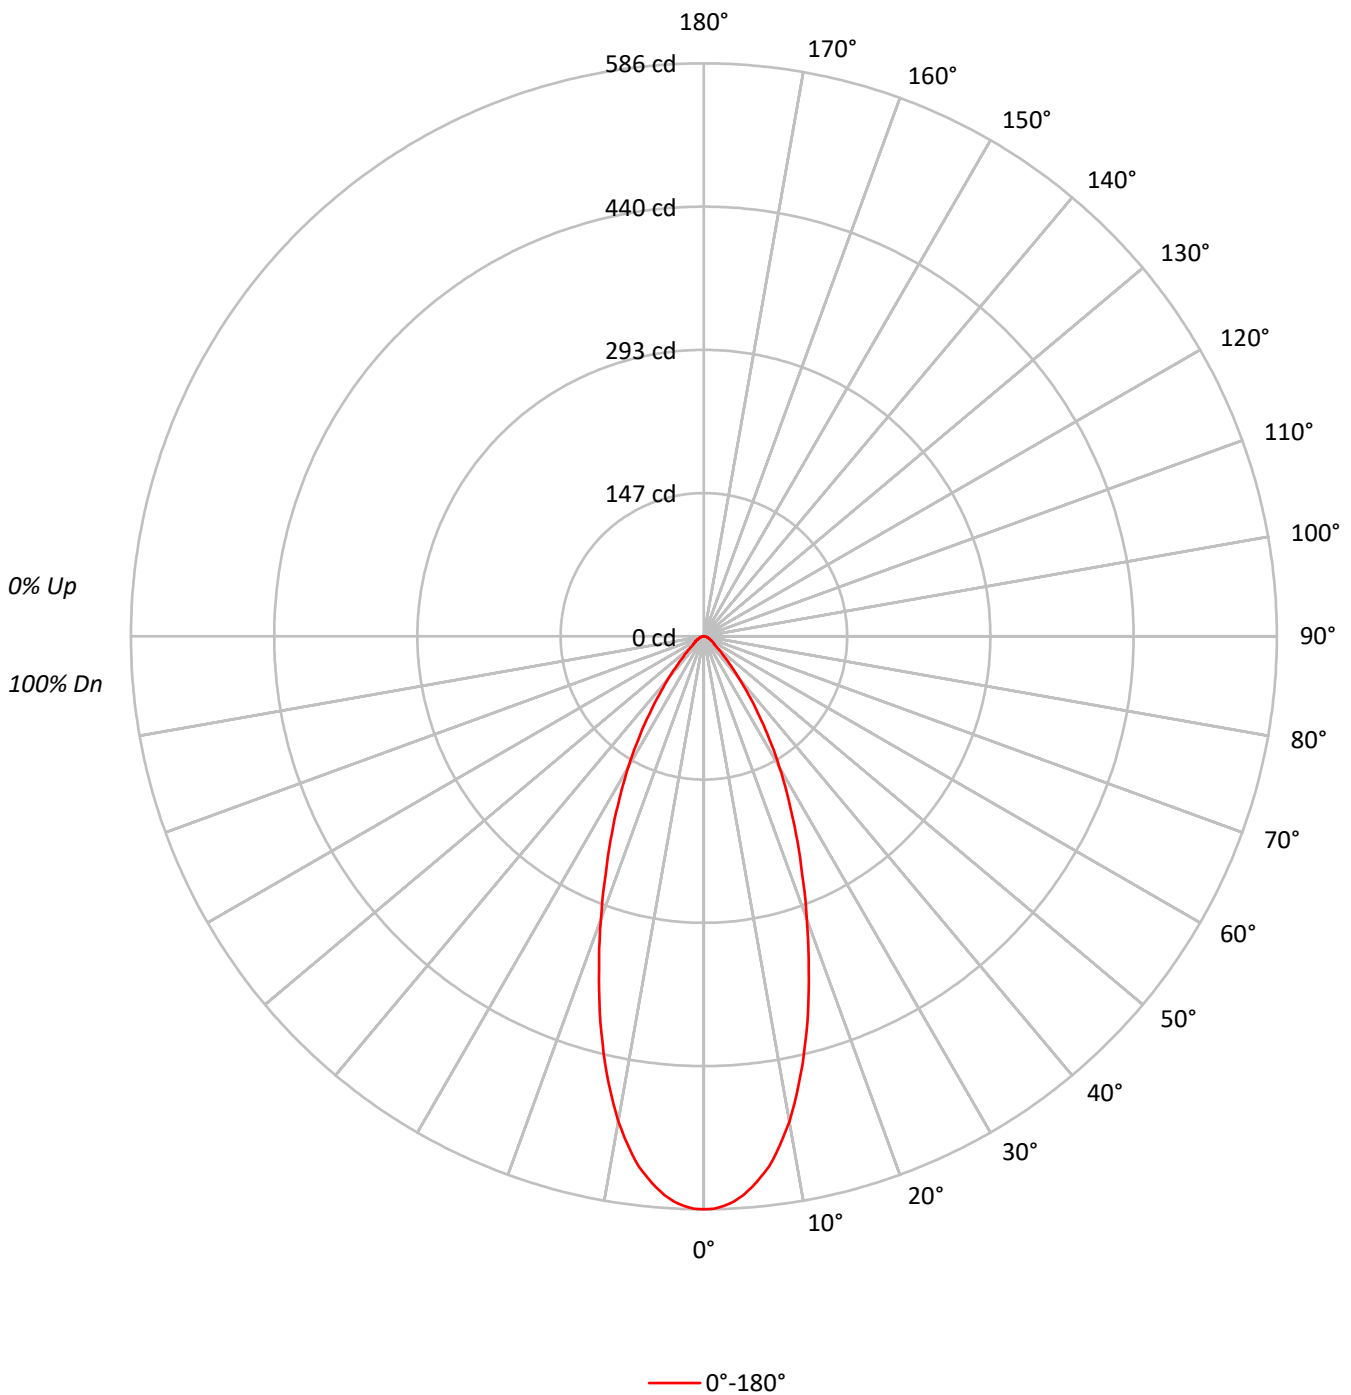



TEST NUMBER: P1292813

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DLP1LI_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.0	13.8
10°-20°	112.6	29.9
20°-30°	102.4	27.2
30°-40°	61.9	16.5
40°-50°	24.8	6.6
50°-60°	11.0	2.9
60°-70°	6.6	1.8
70°-80°	3.6	1.0
80°-90°	1.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	267.0	71.0
0°-40°	328.9	87.5
0°-60°	364.7	97.0
0°-90°	376.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	376.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	586	
5°	566	52
15°	409	113
25°	223	102
35°	97	62
45°	30	25
55°	12	11
65°	6	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1292813
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DLP1LI_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	585.9
1°	585.4
2°	583.0
3°	578.9
4°	573.1
5°	565.5
6°	556.2
7°	546.3
8°	533.5
9°	518.9
10°	503.7
11°	486.2
12°	467.6
13°	448.9
14°	428.5
15°	408.7
17.5°	356.8
20°	307.8
22.5°	262.4
25°	222.7
27.5°	186.6
30°	154.5
32.5°	124.8
35°	97.4
37.5°	74.6
40°	56.0
42.5°	40.8
45°	30.3
47.5°	22.7
50°	16.9
52.5°	13.4
55°	12.2
57.5°	10.5
60°	9.3
62.5°	7.6
65°	6.4
67.5°	5.8
70°	4.7
72.5°	4.1
75°	3.5
77.5°	2.9
80°	1.7
82.5°	1.2
85°	1.2
87.5°	0.6



TEST NUMBER: P1292813
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3DLP1LI_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)