

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292841

Luminaire Tested: P3AS09R30W2N902765DE010 E3PH1MW\_6500K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292841  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R30W2N902765DE010 E3PH1MW\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 6500K CCT AND, 90CRI ,  
E3PH1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 606.0 lumens  
Efficiency: N/A  
Efficacy: 67.3 lumens/watt  
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292841  
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3PH1MW\_6500K

### Luminous Intensity Polar Plot

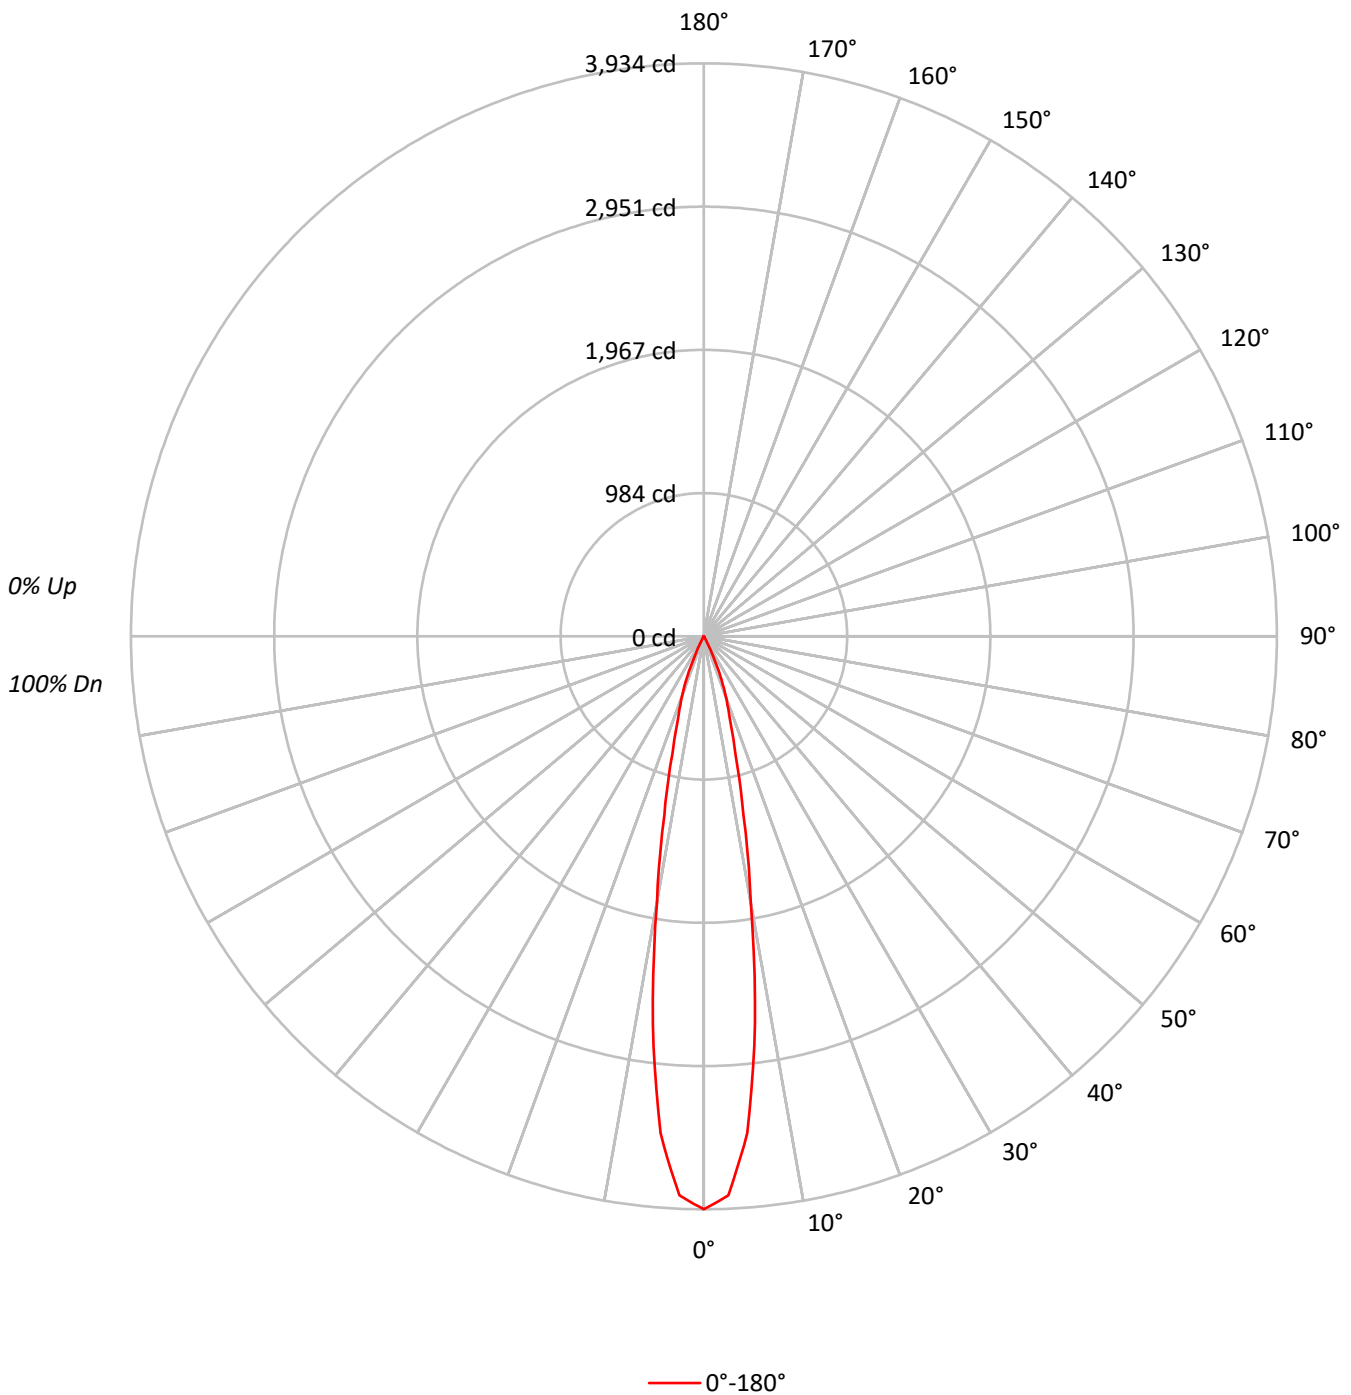



TEST NUMBER: P1292841

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3PH1MW\_6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95	94	94	93
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	92	91	90
4	106	101	98	95	105	100	97	95	98	96	94	97	94	92	95	93	91	89	88	87	86
5	104	98	95	92	102	97	94	91	96	93	91	94	92	90	93	91	89	88	87	86	85
6	101	95	92	89	100	95	91	89	94	91	88	92	90	88	91	89	87	86	85	84	83
7	99	93	89	87	98	92	89	86	91	88	86	90	88	86	89	87	85	84	83	82	81
8	96	91	87	84	96	90	87	84	89	86	84	88	86	84	88	85	83	82	81	80	79
9	94	89	85	82	94	88	85	82	87	84	82	87	84	82	86	84	82	81	80	79	78
10	92	87	83	81	92	86	83	81	86	82	80	85	82	80	84	82	80	79	78	77	76

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	862562
5°	753465
10°	413330
15°	190171
20°	102489
25°	34744
30°	4507
35°	669
40°	229
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 0 cd/sqm



TEST NUMBER: P1292841

CATALOG NUMBER: P3AS09R30W2N902765DE010 E3PH1MW\_6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	274.2	45.3
10°-20°	251.3	41.5
20°-30°	77.3	12.8
30°-40°	2.9	0.5
40°-50°	0.2	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	602.9	99.5
0°-40°	605.7	100.0
0°-60°	606.0	100.0
0°-90°	606.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	606.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3934	
5°	3423	274
15°	838	251
25°	144	77
35°	2	3
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1292841  
CATALOG NUMBER: P3AS09R30W2N902765DE010 E3PH1MW\_6500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3933.6
2.5°	3841.8
5°	3423.0
7.5°	2685.5
10°	1856.3
12.5°	1256.5
15°	837.7
17.5°	587.1
20°	439.2
22.5°	295.7
25°	143.6
27.5°	52.7
30°	17.8
32.5°	5.9
35°	2.5
37.5°	1.7
40°	0.8
42.5°	0.8
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)