

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292855

Luminaire Tested: P3AS09R35W2N902750DE010 E3CB1MB_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1292855
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R35W2N902750DE010 E3CB1MB_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3CB1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 740.0 lumens
Efficiency: N/A
Efficacy: 82.2 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1292855
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CB1MB_3000K

Luminous Intensity Polar Plot

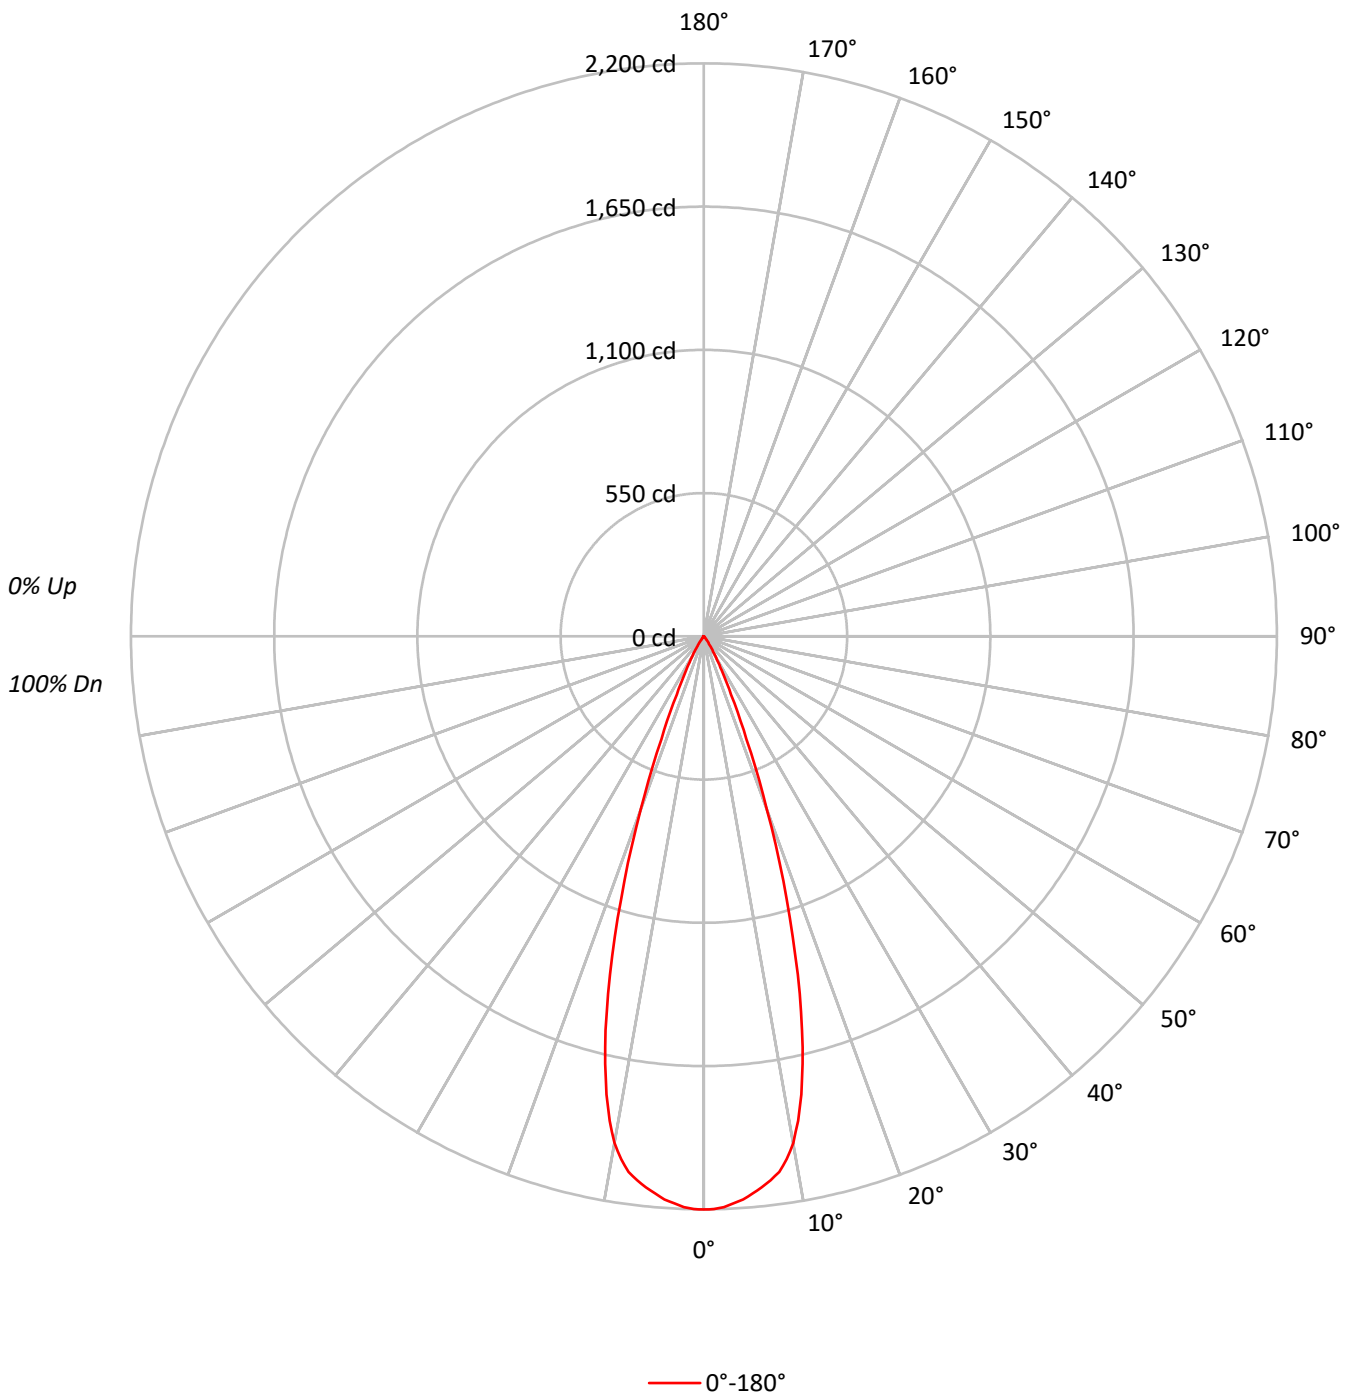



TEST NUMBER: P1292855

CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CB1MB_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.2	27.1
10°-20°	375.6	50.8
20°-30°	133.0	18.0
30°-40°	23.3	3.1
40°-50°	3.4	0.5
50°-60°	1.9	0.3
60°-70°	1.4	0.2
70°-80°	1.0	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	708.8	95.8
0°-40°	732.1	98.9
0°-60°	737.4	99.6
0°-90°	740.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	740.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2200	
5°	2148	200
15°	1420	376
25°	246	133
35°	30	23
45°	3	3
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1292855
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CB1MB_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2200.5
1°	2199.9
2°	2192.9
3°	2179.5
4°	2167.3
5°	2147.5
6°	2127.1
7°	2104.4
8°	2076.4
9°	2032.7
10°	1975.0
11°	1895.1
12°	1799.0
13°	1684.8
14°	1558.9
15°	1420.2
17.5°	1057.7
20°	707.5
22.5°	426.6
25°	245.9
27.5°	146.9
30°	91.5
32.5°	53.0
35°	30.3
37.5°	19.2
40°	11.7
42.5°	5.8
45°	2.9
47.5°	2.3
50°	2.3
52.5°	2.3
55°	2.3
57.5°	1.7
60°	1.7
62.5°	1.7
65°	1.2
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0



TEST NUMBER: P1292855
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CB1MB_3000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)