

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1292874

Luminaire Tested: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1292874  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,  
E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 671.0 lumens  
Efficiency: N/A  
Efficacy: 74.6 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1292874  
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

### Luminous Intensity Polar Plot

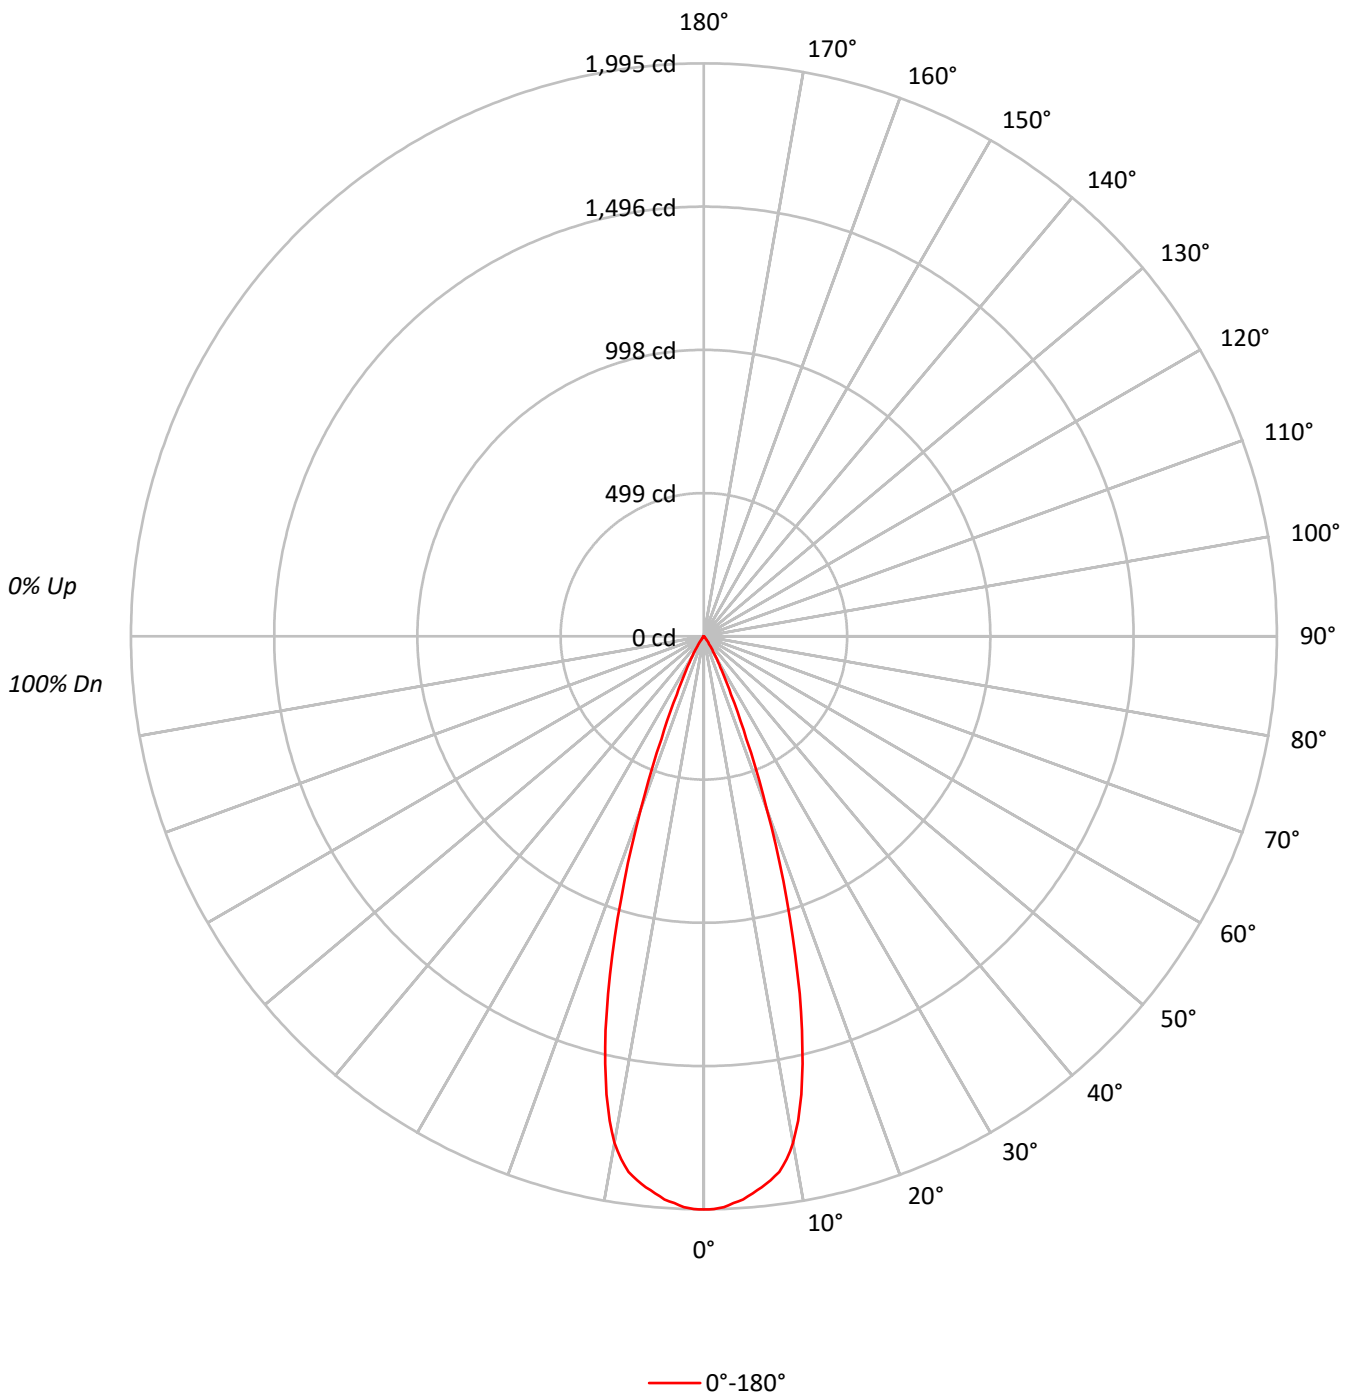



TEST NUMBER: P1292874

CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	93	93	93	93
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	89	89	89	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86	86	86	86
5	100	94	90	87	99	93	89	86	92	88	86	90	87	85	89	86	84	83	83	83	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80	80	80	80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	77	77	77	77
8	91	84	80	77	90	84	80	77	83	79	77	82	79	76	81	78	76	75	75	75	75
9	89	82	77	74	88	81	77	74	80	77	74	80	76	74	79	76	74	73	73	73	73
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	70	70	70	70

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	437531
5°	428614
10°	398746
15°	292351
20°	149696
25°	53955
30°	21016
35°	7362
40°	3034
45°	806
50°	716
55°	803
60°	702
65°	571
70°	705
75°	932
80°	631
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 932 cd/sqm



TEST NUMBER: P1292874

CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	181.5	27.1
10°-20°	340.6	50.8
20°-30°	120.6	18.0
30°-40°	21.1	3.1
40°-50°	3.1	0.5
50°-60°	1.7	0.3
60°-70°	1.3	0.2
70°-80°	0.9	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	642.7	95.8
0°-40°	663.8	98.9
0°-60°	668.6	99.6
0°-90°	671.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	671.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1995	
5°	1947	182
15°	1288	341
25°	223	121
35°	28	21
45°	3	3
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1292874  
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1995.3
1°	1994.8
2°	1988.5
3°	1976.3
4°	1965.2
5°	1947.2
6°	1928.7
7°	1908.1
8°	1882.8
9°	1843.1
10°	1790.8
11°	1718.4
12°	1631.2
13°	1527.7
14°	1413.5
15°	1287.8
17.5°	959.1
20°	641.5
22.5°	386.8
25°	223.0
27.5°	133.2
30°	83.0
32.5°	48.1
35°	27.5
37.5°	17.4
40°	10.6
42.5°	5.3
45°	2.6
47.5°	2.1
50°	2.1
52.5°	2.1
55°	2.1
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.1
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.0
87.5°	0.0



TEST NUMBER: P1292874  
CATALOG NUMBER: P3AS09R35W2N902750DE010 E3CD1MMS\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)