

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293043

Luminaire Tested: P3AS09R35W2N902765DE010 E3DL1H\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1293043  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R35W2N902765DE010 E3DL1H\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,  
E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 612.9 lumens  
Efficiency: N/A  
Efficacy: 68.1 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293043  
CATALOG NUMBER: P3AS09R35W2N902765DE010 E3DL1H\_3000K

### Luminous Intensity Polar Plot

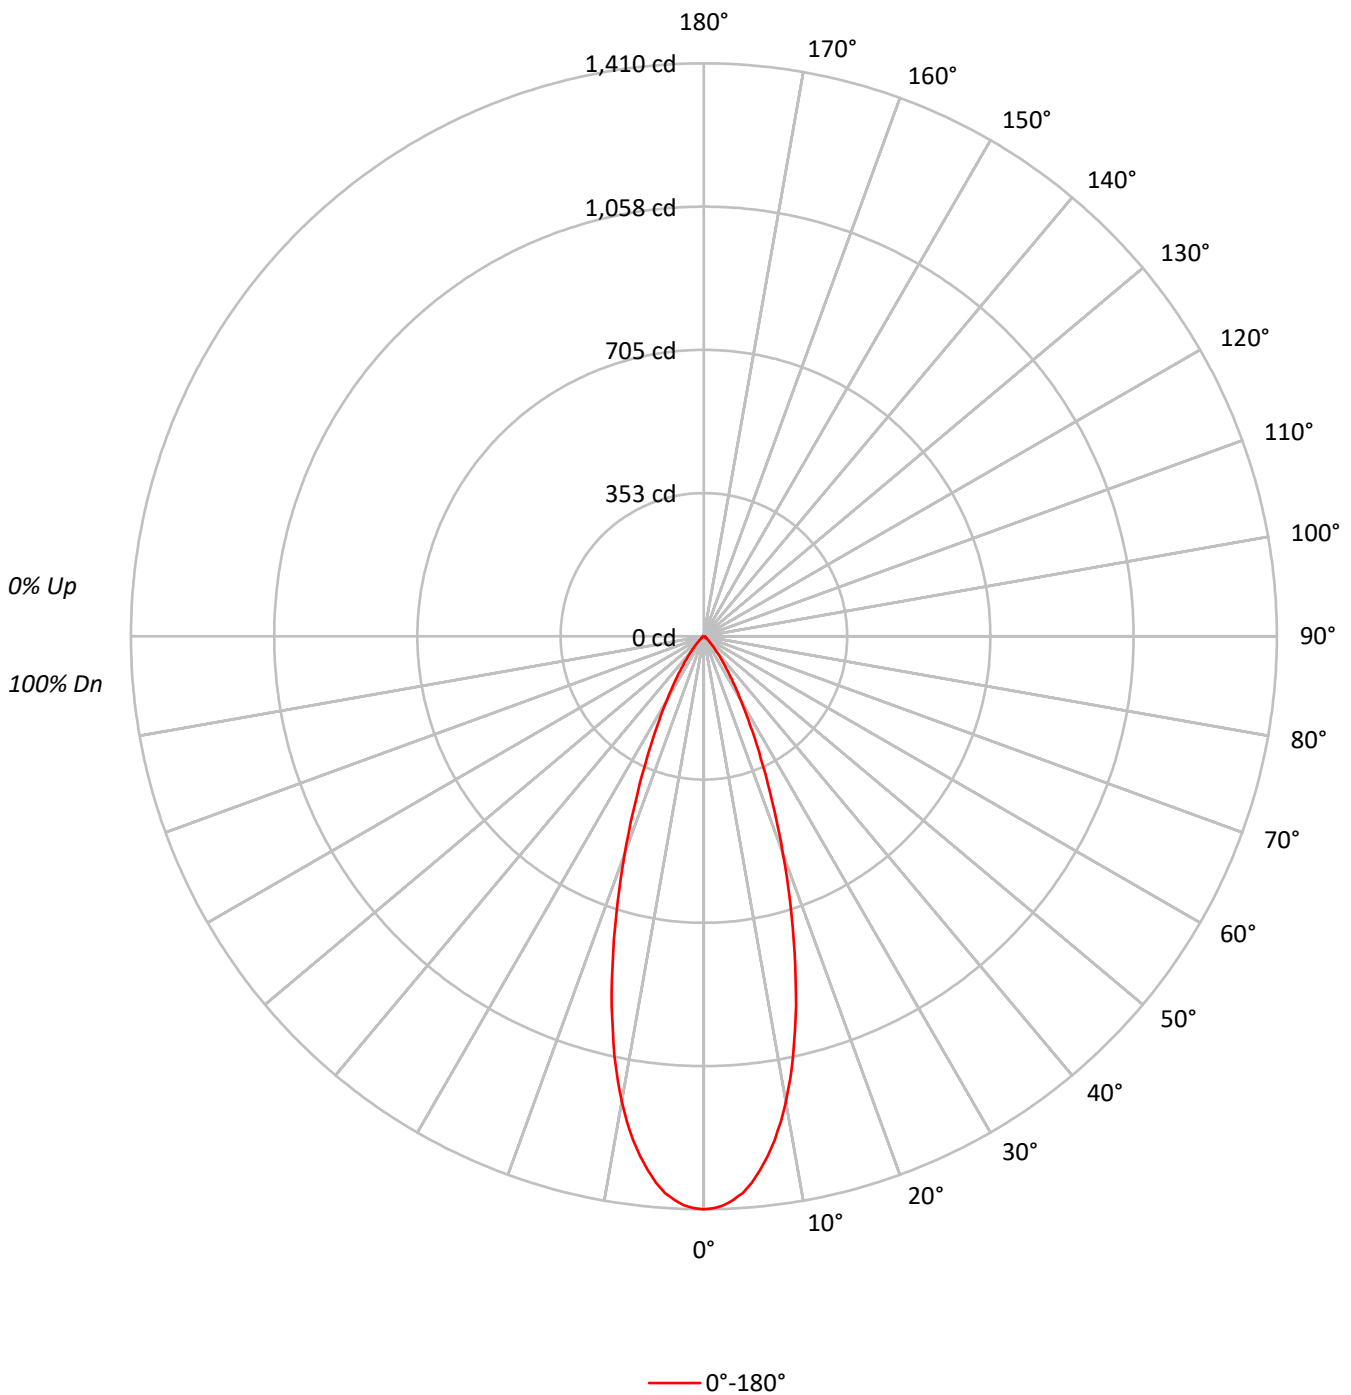



TEST NUMBER: P1293043  
 CATALOG NUMBER: P3AS09R35W2N902765DE010 E3DL1H\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	90	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80	80	80	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	70	70	70	70
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67	67	67	67
9	82	74	69	66	81	74	69	65	73	68	65	72	68	65	71	68	65	64	64	64	64
10	79	71	66	63	78	71	66	63	70	66	63	69	65	62	69	65	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	309164
5°	297138
10°	258891
15°	198299
20°	132662
25°	80279
30°	46058
35°	25752
40°	13683
45°	7039
50°	3377
55°	2676
60°	2544
65°	2127
70°	2244
75°	1949
80°	2147
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7039 cd/sqm



TEST NUMBER: P1293043

CATALOG NUMBER: P3AS09R35W2N902765DE010 E3DL1H\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	122.8	20.0
10°-20°	238.0	38.8
20°-30°	155.8	25.4
30°-40°	63.2	10.3
40°-50°	19.0	3.1
50°-60°	6.4	1.1
60°-70°	4.3	0.7
70°-80°	2.5	0.4
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	516.6	84.3
0°-40°	579.8	94.6
0°-60°	605.2	98.7
0°-90°	612.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1410	
5°	1350	123
15°	874	238
25°	332	156
35°	96	63
45°	23	19
55°	7	6
65°	4	4
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1293043  
CATALOG NUMBER: P3AS09R35W2N902765DE010 E3DL1H\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1409.9
1°	1407.6
2°	1401.2
3°	1388.4
4°	1373.2
5°	1349.9
6°	1320.7
7°	1288.1
8°	1251.3
9°	1209.3
10°	1162.7
11°	1110.8
12°	1056.6
13°	995.9
14°	938.2
15°	873.5
17.5°	716.6
20°	568.5
22.5°	437.3
25°	331.8
27.5°	247.2
30°	181.9
32.5°	133.5
35°	96.2
37.5°	68.2
40°	47.8
42.5°	33.2
45°	22.7
47.5°	15.2
50°	9.9
52.5°	7.6
55°	7.0
57.5°	6.4
60°	5.8
62.5°	5.2
65°	4.1
67.5°	3.5
70°	3.5
72.5°	2.9
75°	2.3
77.5°	1.7
80°	1.7
82.5°	1.2
85°	0.6
87.5°	0.6



TEST NUMBER: P1293043  
CATALOG NUMBER: P3AS09R35W2N902765DE010 E3DL1H\_3000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)