

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293399

Luminaire Tested: P3AS09R40W2N902765DE010 E3DL1WH\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1293399  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R40W2N902765DE010 E3DL1WH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3500K CCT AND, 90CRI ,  
E3DL1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 435.0 lumens  
Efficiency: N/A  
Efficacy: 48.3 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293399  
CATALOG NUMBER: P3AS09R40W2N902765DE010 E3DL1WH\_3500K

### Luminous Intensity Polar Plot

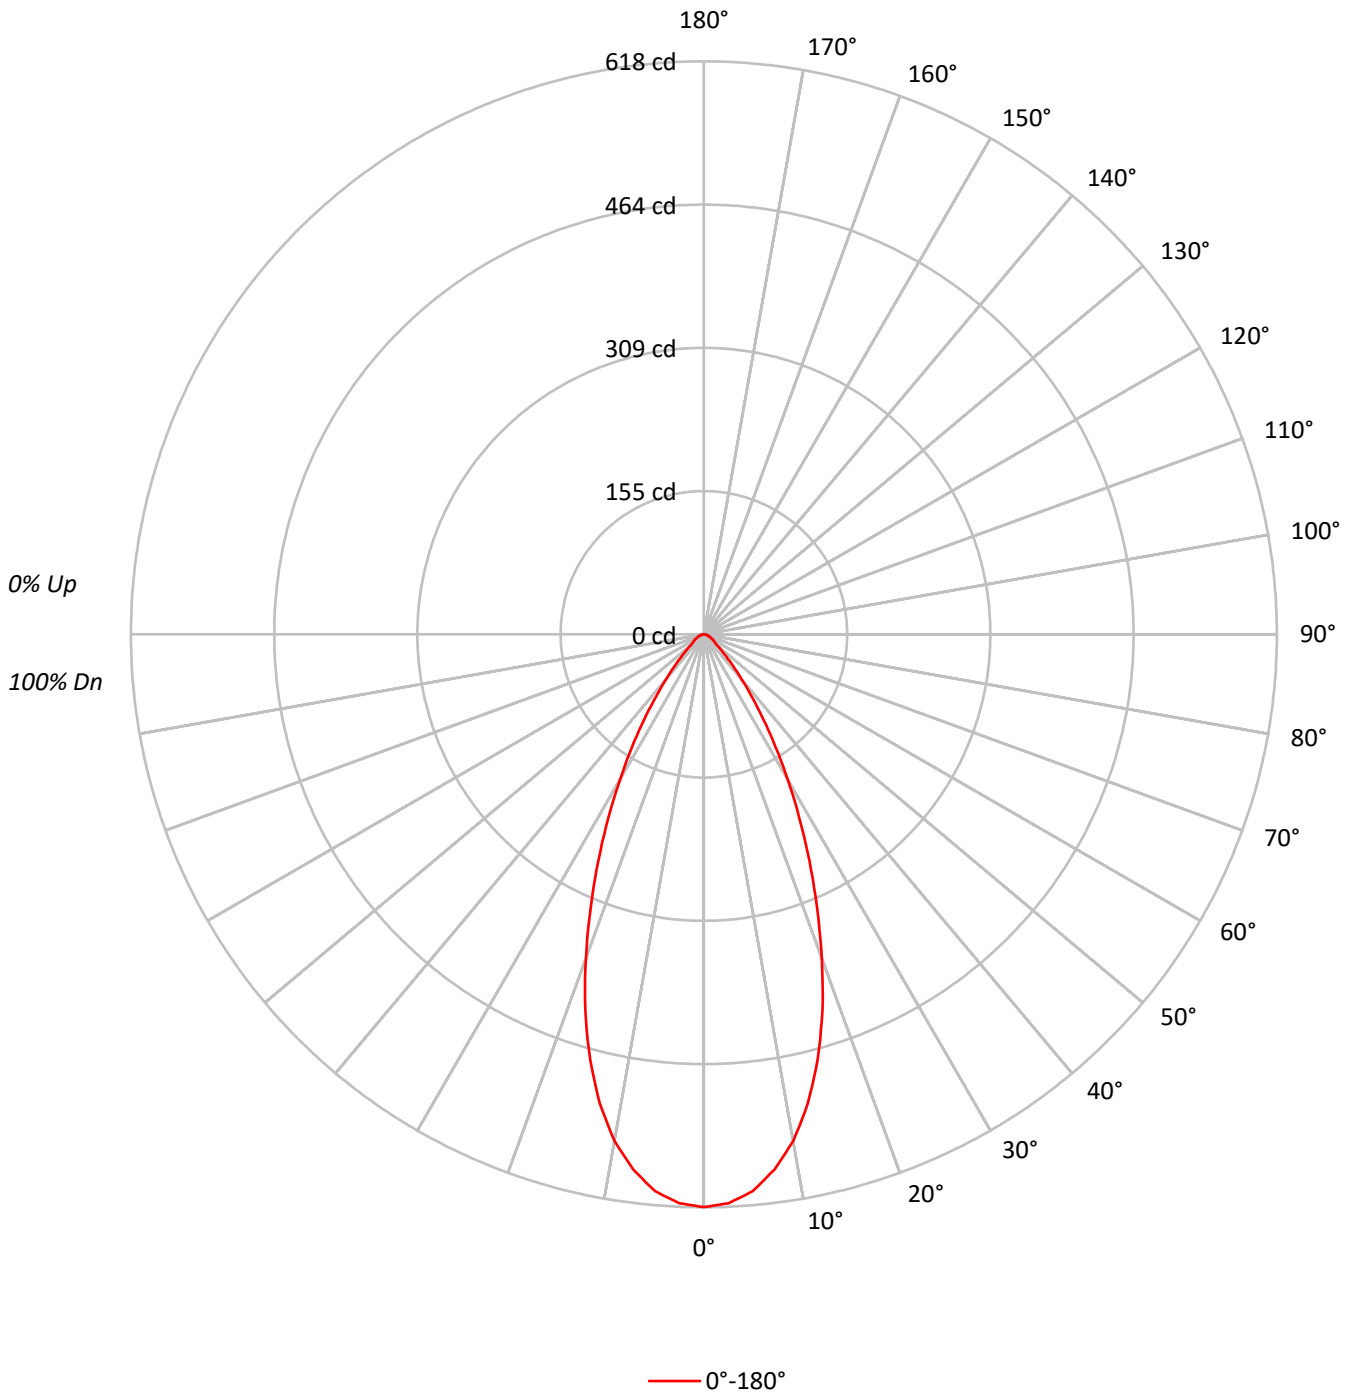





TEST NUMBER: P1293399

CATALOG NUMBER: P3AS09R40W2N902765DE010 E3DL1WH\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 56.0   | 12.9      |
| 10°-20°   | 130.7  | 30.0      |
| 20°-30°   | 123.1  | 28.3      |
| 30°-40°   | 71.2   | 16.4      |
| 40°-50°   | 28.4   | 6.5       |
| 50°-60°   | 12.6   | 2.9       |
| 60°-70°   | 7.8    | 1.8       |
| 70°-80°   | 4.1    | 0.9       |
| 80°-90°   | 1.3    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 309.8  | 71.2      |
| 0°-40°    | 381.0  | 87.6      |
| 0°-60°    | 421.9  | 97.0      |
| 0°-90°    | 435.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 435.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 618 |      |
| 5°  | 603 | 56   |
| 15° | 474 | 131  |
| 25° | 269 | 123  |
| 35° | 112 | 71   |
| 45° | 35  | 28   |
| 55° | 14  | 13   |
| 65° | 8   | 8    |
| 75° | 4   | 4    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P1293399  
CATALOG NUMBER: P3AS09R40W2N902765DE010 E3DL1WH\_3500K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 617.7 |
| 2.5°  | 614.1 |
| 5°    | 602.9 |
| 7.5°  | 582.2 |
| 10°   | 554.9 |
| 12.5° | 518.2 |
| 15°   | 474.4 |
| 17.5° | 425.2 |
| 20°   | 371.9 |
| 22.5° | 318.6 |
| 25°   | 268.9 |
| 27.5° | 222.7 |
| 30°   | 180.6 |
| 32.5° | 143.9 |
| 35°   | 111.9 |
| 37.5° | 84.7  |
| 40°   | 63.4  |
| 42.5° | 47.4  |
| 45°   | 34.9  |
| 47.5° | 25.5  |
| 50°   | 19.0  |
| 52.5° | 15.4  |
| 55°   | 13.6  |
| 57.5° | 12.4  |
| 60°   | 10.7  |
| 62.5° | 8.9   |
| 65°   | 7.7   |
| 67.5° | 6.5   |
| 70°   | 5.9   |
| 72.5° | 4.7   |
| 75°   | 3.6   |
| 77.5° | 3.0   |
| 80°   | 2.4   |
| 82.5° | 1.8   |
| 85°   | 1.2   |
| 87.5° | 0.6   |
| 90°   | 0.0   |

(END OF REPORT)