

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293603

Luminaire Tested: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1293603  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 3500K CCT AND, 90CRI ,  
E3DLP1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 427.0 lumens  
Efficiency: N/A  
Efficacy: 47.4 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1293603  
CATALOG NUMBER: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K

### Luminous Intensity Polar Plot

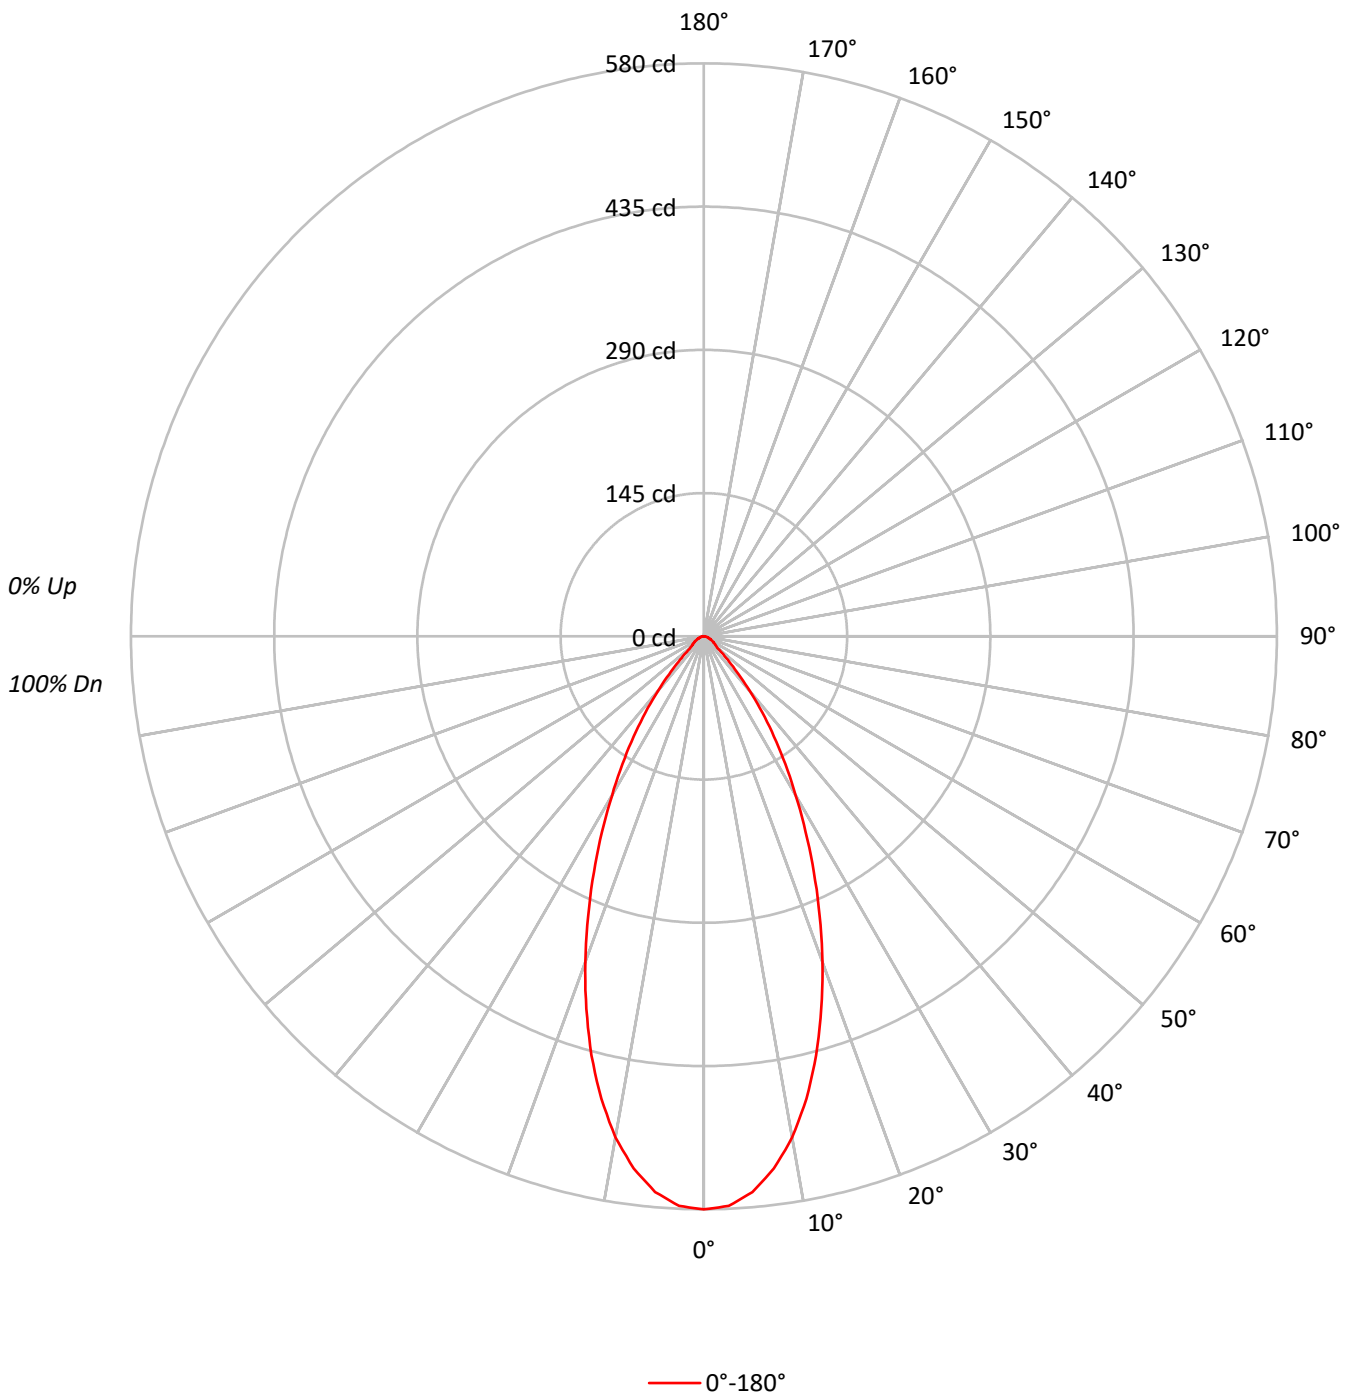



TEST NUMBER: P1293603

CATALOG NUMBER: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86				86
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79				79
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74				74
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69				69
6	87	78	72	67	85	77	71	67	75	70	66	74	69	66	73	69	66	64				64
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60				60
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56				56
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53				53
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50				50

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	127183
5°	124279
10°	114649
15°	99705
20°	81907
25°	63729
30°	47045
35°	33114
40°	20667
45°	11195
50°	6072
55°	5199
60°	4693
65°	3995
70°	3398
75°	3474
80°	3031
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11195 cd/sqm



TEST NUMBER: P1293603

CATALOG NUMBER: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	52.3	12.2
10°-20°	121.4	28.4
20°-30°	120.5	28.2
30°-40°	77.6	18.2
40°-50°	29.9	7.0
50°-60°	12.2	2.8
60°-70°	7.7	1.8
70°-80°	4.1	1.0
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	294.2	68.9
0°-40°	371.9	87.1
0°-60°	413.9	96.9
0°-90°	427.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	427.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	580	
5°	565	52
15°	439	121
25°	263	121
35°	124	78
45°	36	30
55°	14	12
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1293603  
CATALOG NUMBER: P3AS09R45W2N902750DE010 E3DLP1WMH\_3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	580.0
2.5°	577.1
5°	564.6
7.5°	543.3
10°	514.9
12.5°	479.4
15°	439.2
17.5°	395.4
20°	351.0
22.5°	306.0
25°	263.4
27.5°	223.1
30°	185.8
32.5°	153.3
35°	123.7
37.5°	97.1
40°	72.2
42.5°	52.1
45°	36.1
47.5°	24.3
50°	17.8
52.5°	14.8
55°	13.6
57.5°	11.8
60°	10.7
62.5°	8.9
65°	7.7
67.5°	6.5
70°	5.3
72.5°	4.7
75°	4.1
77.5°	3.0
80°	2.4
82.5°	1.8
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)