

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293771

Luminaire Tested: P3AS09R50W2N902750DE010 E3CD1MB_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1293771
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R50W2N902750DE010 E3CD1MB_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,
E3CD1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 723.0 lumens
Efficiency: N/A
Efficacy: 80.3 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1293771
CATALOG NUMBER: P3AS09R50W2N902750DE010 E3CD1MB_2700K

Luminous Intensity Polar Plot

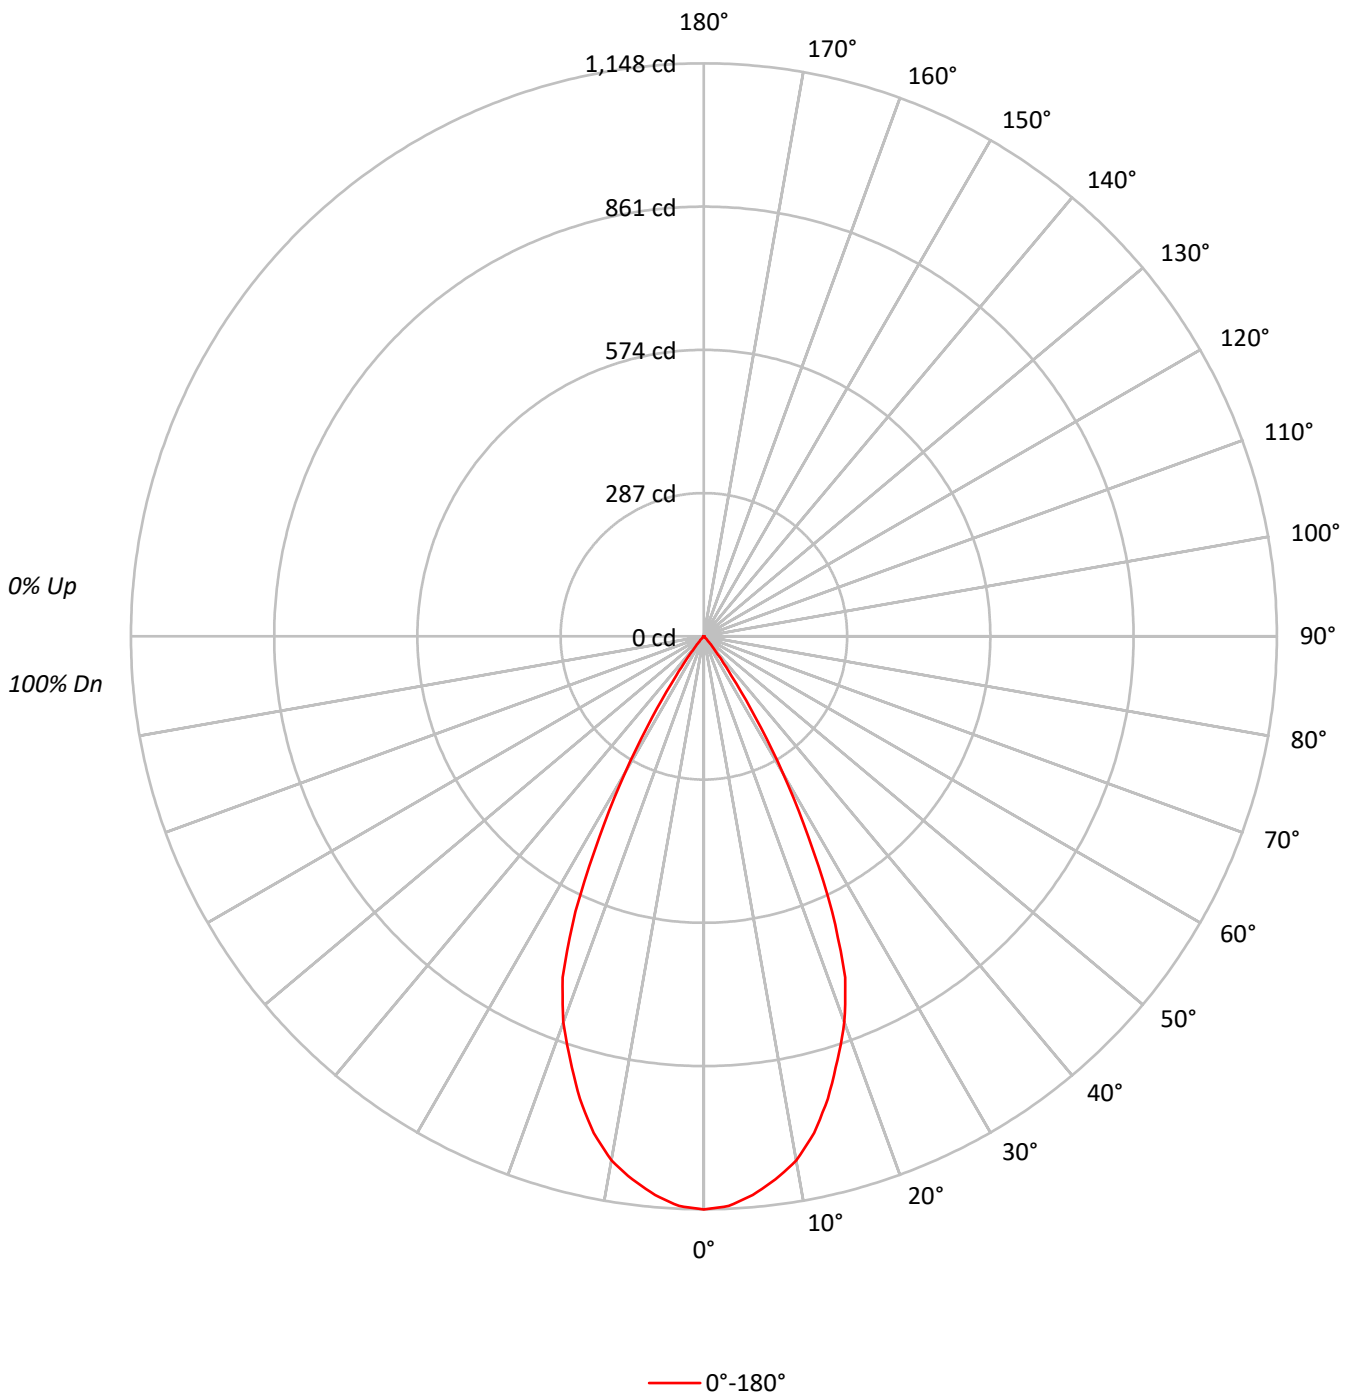



TEST NUMBER: P1293771

CATALOG NUMBER: P3AS09R50W2N902750DE010 E3CD1MB_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.4	14.6
10°-20°	266.6	36.9
20°-30°	267.0	36.9
30°-40°	75.1	10.4
40°-50°	4.5	0.6
50°-60°	1.7	0.2
60°-70°	1.4	0.2
70°-80°	0.9	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	639.0	88.4
0°-40°	714.1	98.8
0°-60°	720.3	99.6
0°-90°	723.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	723.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1148	
5°	1124	105
15°	959	267
25°	608	267
35°	96	75
45°	3	5
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1293771

CATALOG NUMBER: P3AS09R50W2N902750DE010 E3CD1MB_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1148.3
2.5°	1142.5
5°	1123.5
7.5°	1097.6
10°	1066.4
12.5°	1019.4
15°	959.1
17.5°	889.9
20°	822.8
22.5°	739.3
25°	608.2
27.5°	452.9
30°	316.0
32.5°	190.8
35°	96.2
37.5°	45.4
40°	21.1
42.5°	7.9
45°	2.6
47.5°	2.1
50°	2.1
52.5°	2.1
55°	2.1
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.6
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)