

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293926

Luminaire Tested: P3AS09R50W2N902765DE010 E3CD1MMS_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1293926
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R50W2N902765DE010 E3CD1MMS_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 3000K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 798.0 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1293926
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3CD1MMS_3000K

Luminous Intensity Polar Plot

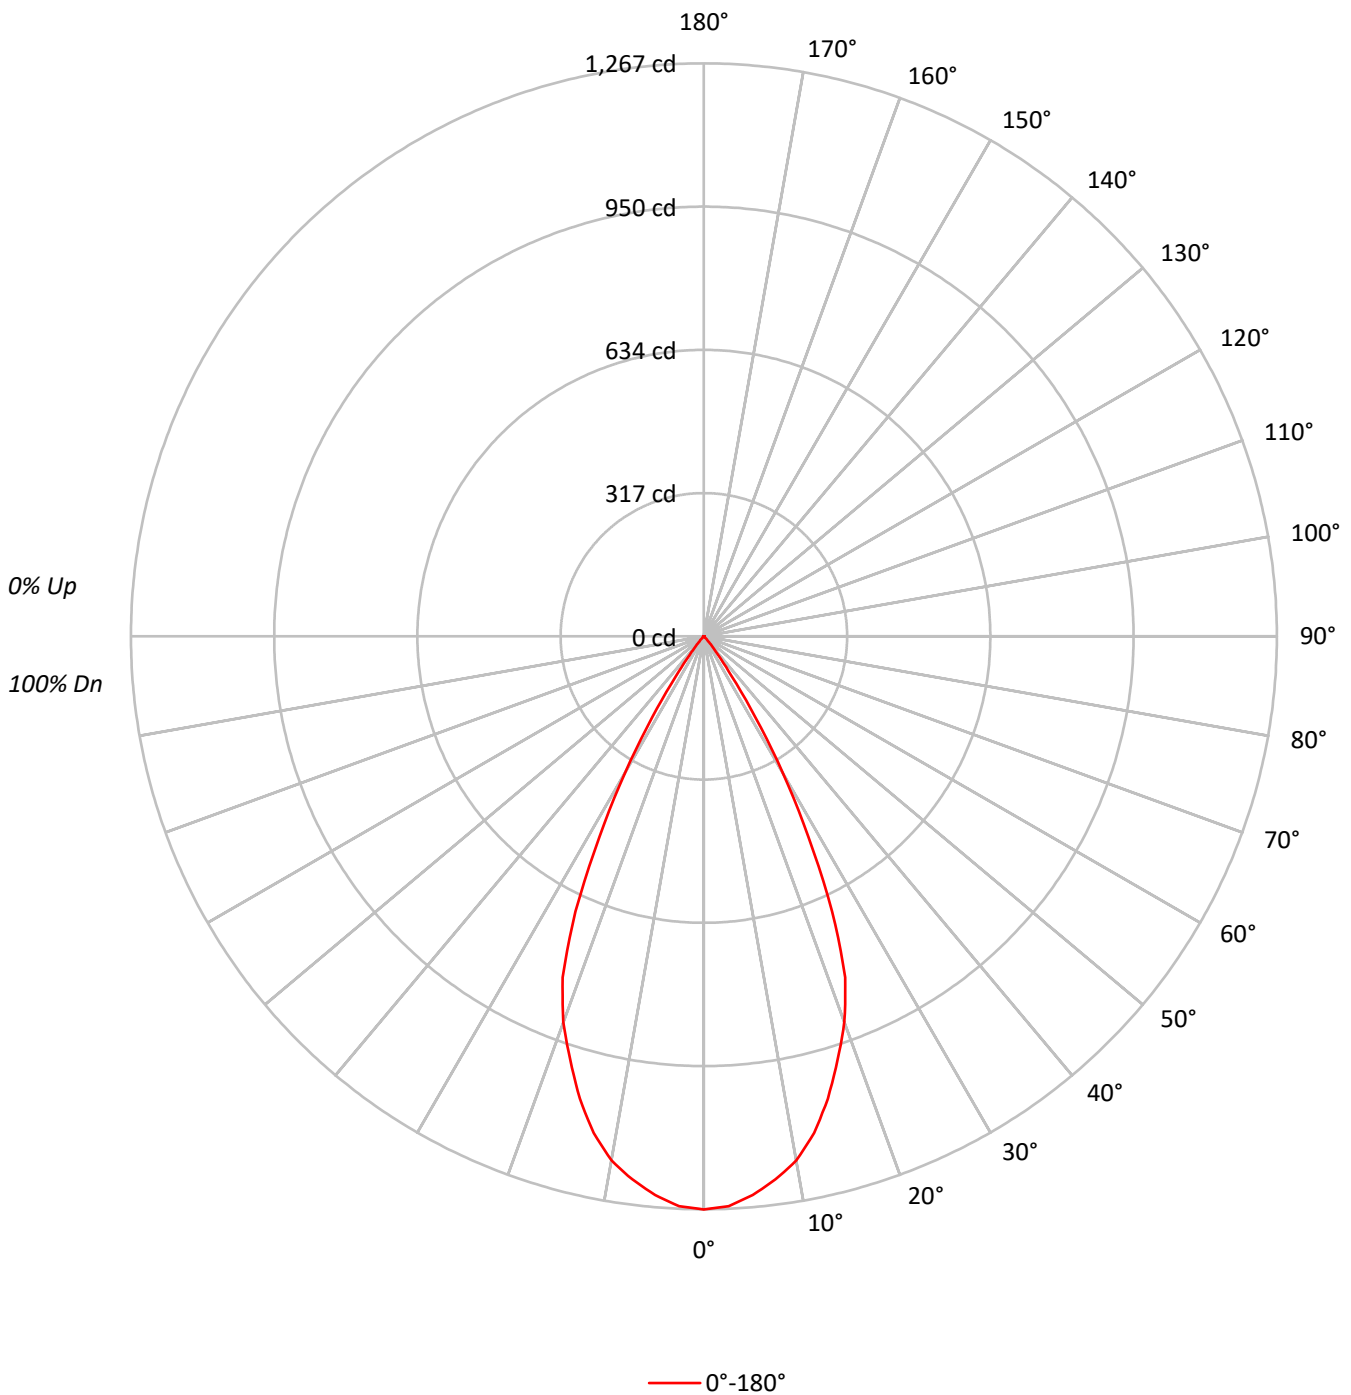



TEST NUMBER: P1293926
 CATALOG NUMBER: P3AS09R50W2N902765DE010 E3CD1MMS_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	101	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	90	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80	80	80	80
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76	76	76	76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	73	72	72	72	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
8	85	76	71	67	83	76	71	67	75	70	67	74	70	67	73	69	66	65	65	65	65
9	81	73	68	64	80	72	67	64	71	67	64	71	66	63	70	66	63	62	62	62	62
10	78	69	64	61	77	69	64	61	68	64	61	68	63	61	67	63	60	59	59	59	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	277916
5°	272947
10°	262075
15°	240319
20°	211908
25°	162421
30°	88317
35°	28429
40°	6670
45°	899
50°	785
55°	879
60°	746
65°	882
70°	769
75°	1017
80°	758
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 85°
 Luminance: 1510 cd/sqm



TEST NUMBER: P1293926

CATALOG NUMBER: P3AS09R50W2N902765DE010 E3CD1MMS_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.4	14.6
10°-20°	294.3	36.9
20°-30°	294.7	36.9
30°-40°	82.9	10.4
40°-50°	5.0	0.6
50°-60°	1.9	0.2
60°-70°	1.5	0.2
70°-80°	1.0	0.1
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	705.3	88.4
0°-40°	788.2	98.8
0°-60°	795.0	99.6
0°-90°	798.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	798.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1267	
5°	1240	116
15°	1059	294
25°	671	295
35°	106	83
45°	3	5
55°	2	2
65°	2	1
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P1293926
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3CD1MMS_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1267.4
2.5°	1261.0
5°	1240.0
7.5°	1211.4
10°	1177.0
12.5°	1125.1
15°	1058.6
17.5°	982.2
20°	908.1
22.5°	816.0
25°	671.3
27.5°	499.8
30°	348.8
32.5°	210.6
35°	106.2
37.5°	50.2
40°	23.3
42.5°	8.7
45°	2.9
47.5°	2.3
50°	2.3
52.5°	2.3
55°	2.3
57.5°	1.7
60°	1.7
62.5°	1.7
65°	1.7
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0

(END OF REPORT)