

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1293971

Luminaire Tested: P3AS09R50W2N902765DE010 E3DL1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1293971
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R50W2N902765DE010 E3DL1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 324.0 lumens
Efficiency: N/A
Efficacy: 36.0 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1293971
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DL1GPH_5000K

Luminous Intensity Polar Plot

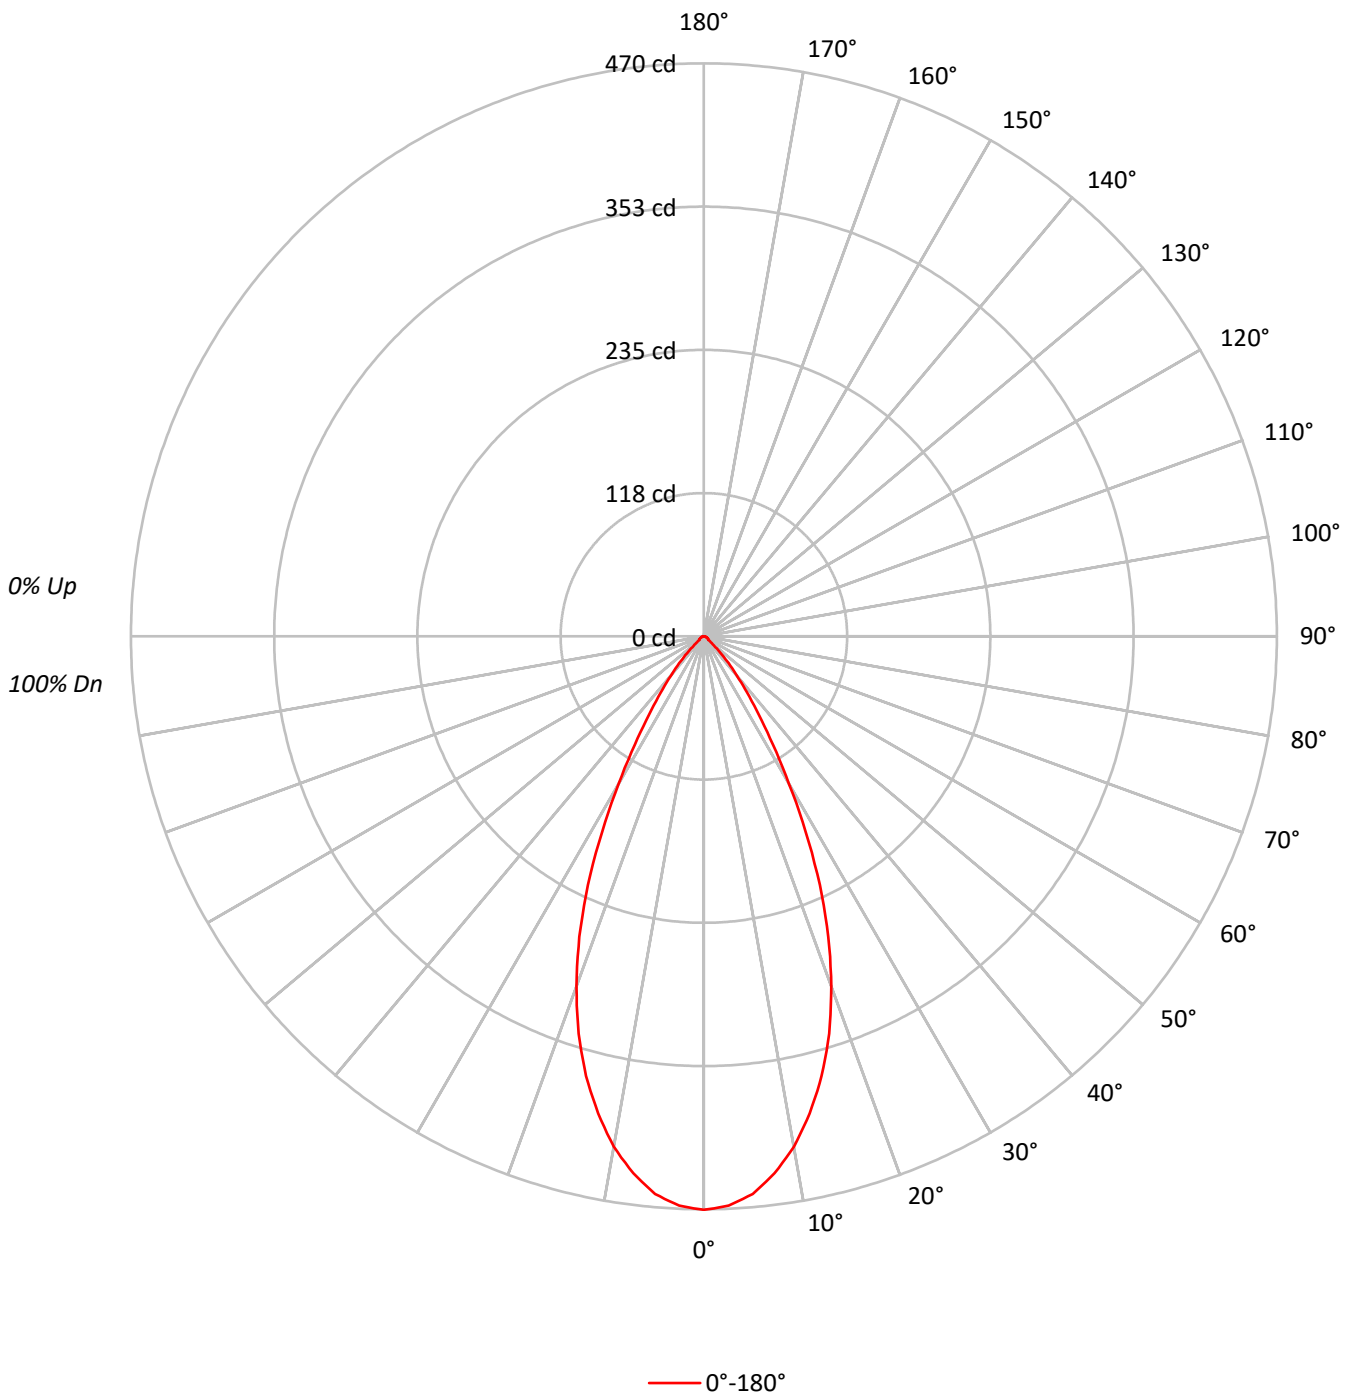



TEST NUMBER: P1293971

CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DL1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82	82	82	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76	76	76	76
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72	72	72	72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	67	67	67	67
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64	64	64	64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60	60	60	60
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57	57	57	57
10	74	65	59	56	73	65	59	56	64	59	55	63	58	55	62	58	55	54	54	54	54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	103150
5°	101078
10°	94676
15°	84745
20°	71313
25°	54439
30°	35373
35°	20987
40°	12108
45°	6078
50°	2252
55°	1759
60°	1623
65°	1505
70°	1475
75°	1440
80°	1515
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6078 cd/sqm



TEST NUMBER: P1293971

CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DL1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.7	13.2
10°-20°	103.2	31.9
20°-30°	101.3	31.3
30°-40°	51.0	15.7
40°-50°	16.1	5.0
50°-60°	4.2	1.3
60°-70°	3.0	0.9
70°-80°	1.8	0.6
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	247.3	76.3
0°-40°	298.3	92.1
0°-60°	318.6	98.3
0°-90°	324.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	324.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	470	
5°	459	43
15°	373	103
25°	225	101
35°	78	51
45°	20	16
55°	5	4
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1293971
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DL1GPH_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	470.4
2.5°	467.5
5°	459.2
7.5°	444.2
10°	425.2
12.5°	400.7
15°	373.3
17.5°	341.7
20°	305.6
22.5°	266.8
25°	225.0
27.5°	180.6
30°	139.7
32.5°	105.1
35°	78.4
37.5°	57.9
40°	42.3
42.5°	30.0
45°	19.6
47.5°	11.2
50°	6.6
52.5°	4.9
55°	4.6
57.5°	4.0
60°	3.7
62.5°	3.5
65°	2.9
67.5°	2.6
70°	2.3
72.5°	2.0
75°	1.7
77.5°	1.4
80°	1.2
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)