

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294027

Luminaire Tested: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294027  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 2700K CCT AND, 90CRI ,  
E3DLD1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 463.0 lumens  
Efficiency: N/A  
Efficacy: 51.4 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294027  
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K

### Luminous Intensity Polar Plot

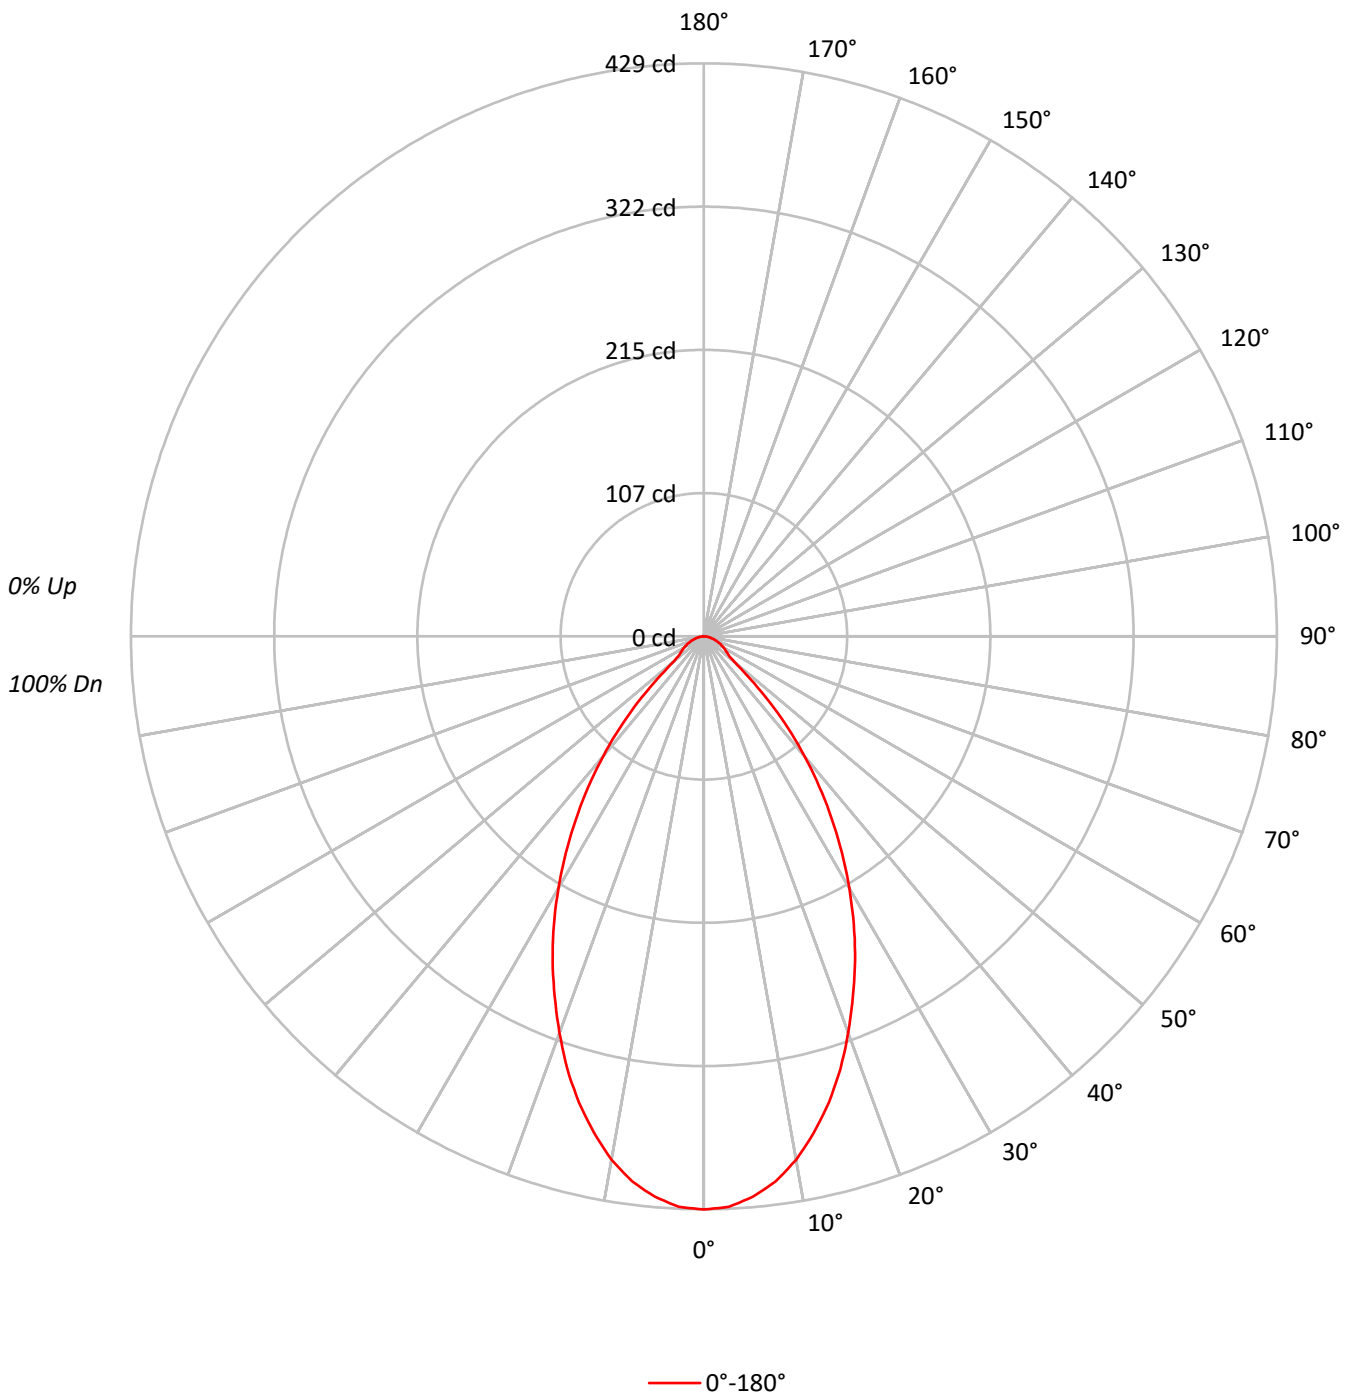



TEST NUMBER: P1294027

CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	86	84	83
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75
4	93	85	78	73	91	83	77	73	81	76	72	79	75	71	77	73	70	69
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	64	63
6	83	73	66	61	81	72	65	61	70	65	60	69	64	60	67	63	59	58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	53
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50
9	70	59	53	48	69	59	52	48	58	52	48	57	52	48	56	51	48	46
10	66	56	49	45	65	55	49	45	54	49	45	54	48	45	53	48	45	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	94093
5°	92714
10°	88598
15°	82044
20°	73740
25°	64818
30°	55122
35°	44705
40°	33577
45°	21646
50°	10268
55°	8067
60°	7631
65°	7108
70°	6411
75°	5846
80°	5304
85°	5284

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21646 cd/sqm



TEST NUMBER: P1294027

CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	39.5	8.5
10°-20°	100.8	21.8
20°-30°	122.4	26.4
30°-40°	103.8	22.4
40°-50°	53.9	11.7
50°-60°	19.5	4.2
60°-70°	13.4	2.9
70°-80°	7.3	1.6
80°-90°	2.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	262.7	56.7
0°-40°	366.5	79.2
0°-60°	439.9	95.0
0°-90°	463.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	463.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	429	
5°	421	39
15°	361	101
25°	268	122
35°	167	104
45°	70	54
55°	21	19
65°	14	13
75°	7	7
85°	2	2
90°	0	



TEST NUMBER: P1294027  
CATALOG NUMBER: P3AS09R50W2N902765DE010 E3DLD1WH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	429.1
2.5°	427.5
5°	421.2
7.5°	411.6
10°	397.9
12.5°	380.5
15°	361.4
17.5°	339.8
20°	316.0
22.5°	291.7
25°	267.9
27.5°	243.1
30°	217.7
32.5°	192.3
35°	167.0
37.5°	142.1
40°	117.3
42.5°	93.5
45°	69.8
47.5°	46.5
50°	30.1
52.5°	23.3
55°	21.1
57.5°	19.0
60°	17.4
62.5°	15.3
65°	13.7
67.5°	11.6
70°	10.0
72.5°	8.5
75°	6.9
77.5°	5.3
80°	4.2
82.5°	3.2
85°	2.1
87.5°	1.1
90°	0.0

(END OF REPORT)