

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294092

Luminaire Tested: P3AS09R55W2N902750DE010 E3CD1MB\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294092  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R55W2N902750DE010 E3CD1MB\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3500K CCT AND, 90CRI ,  
E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 787.0 lumens  
Efficiency: N/A  
Efficacy: 87.4 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294092  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3CD1MB\_3500K

### Luminous Intensity Polar Plot

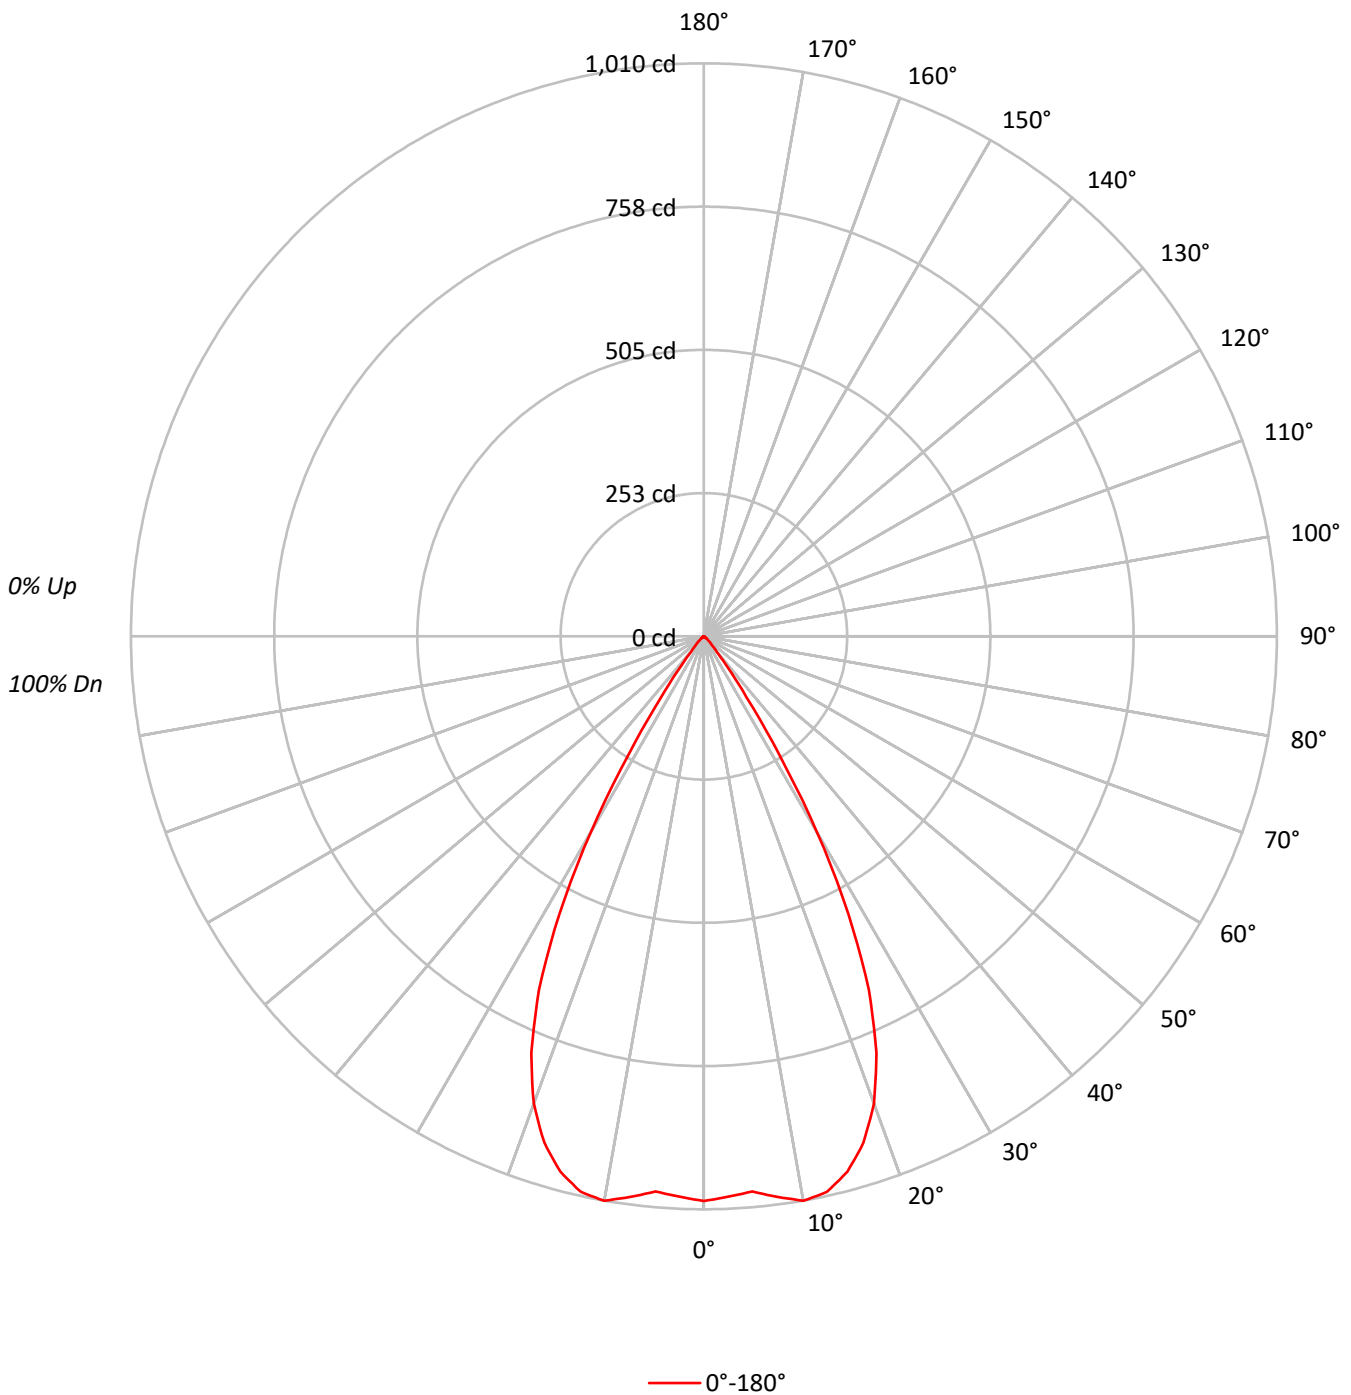



TEST NUMBER: P1294092

CATALOG NUMBER: P3AS09R55W2N902750DE010 E3CD1MB\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	111	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94			94
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89			89
3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	90	87	85	84			84
4	99	92	87	84	98	91	87	83	89	85	82	87	84	81	85	83	80	79			79
5	95	87	82	78	93	86	81	78	85	80	77	83	79	76	82	78	76	74			74
6	91	83	77	73	89	82	77	73	80	76	72	79	75	72	78	74	72	70			70
7	87	78	73	69	85	78	72	69	76	72	68	75	71	68	74	70	68	66			66
8	83	74	69	65	82	74	68	65	73	68	65	72	67	64	71	67	64	63			63
9	79	71	65	61	78	70	65	61	69	64	61	68	64	61	68	64	61	60			60
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57			57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	218272
5°	216244
10°	224935
15°	221817
20°	204534
25°	166437
30°	101079
35°	34987
40°	9990
45°	4776
50°	2013
55°	918
60°	1053
65°	934
70°	769
75°	1017
80°	758
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4776 cd/sqm



TEST NUMBER: P1294092

CATALOG NUMBER: P3AS09R55W2N902750DE010 E3CD1MB\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	95.0	12.1
10°-20°	271.6	34.5
20°-30°	302.7	38.5
30°-40°	99.0	12.6
40°-50°	13.1	1.7
50°-60°	2.8	0.4
60°-70°	1.6	0.2
70°-80°	1.0	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	669.3	85.0
0°-40°	768.3	97.6
0°-60°	784.1	99.6
0°-90°	787.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	787.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	995	
5°	982	95
15°	977	272
25°	688	303
35°	131	99
45°	15	13
55°	2	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1294092  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3CD1MB\_3500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	995.4
2.5°	988.3
5°	982.4
7.5°	996.6
10°	1010.2
12.5°	1003.1
15°	977.1
17.5°	935.7
20°	876.5
22.5°	794.9
25°	687.9
27.5°	551.8
30°	399.2
32.5°	244.9
35°	130.7
37.5°	66.2
40°	34.9
42.5°	22.5
45°	15.4
47.5°	10.6
50°	5.9
52.5°	3.5
55°	2.4
57.5°	2.4
60°	2.4
62.5°	1.8
65°	1.8
67.5°	1.2
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)