

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294164

Luminaire Tested: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294164  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 244.0 lumens  
Efficiency: N/A  
Efficacy: 27.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294164  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

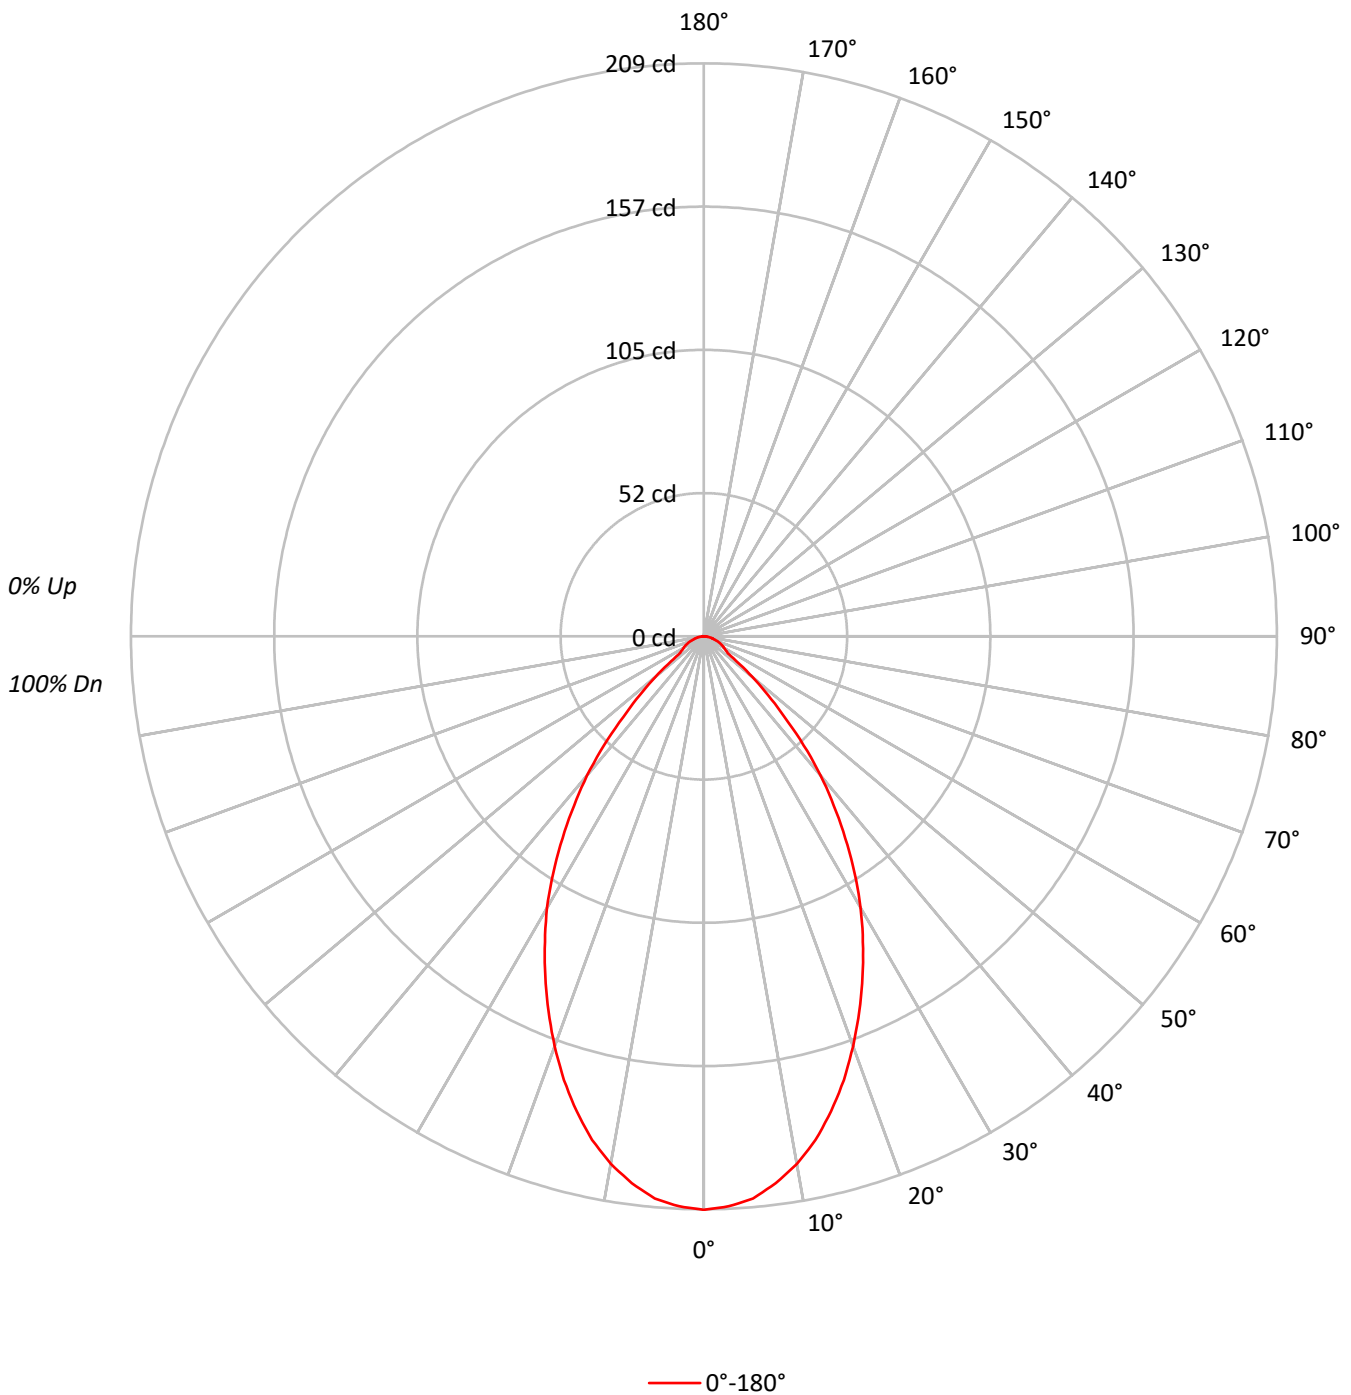



TEST NUMBER: P1294164

CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	64	62
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	45874
5°	45300
10°	43508
15°	40704
20°	37127
25°	33123
30°	28966
35°	24066
40°	18978
45°	12870
50°	7880
55°	4091
60°	3772
65°	3580
70°	3334
75°	2965
80°	2904
85°	2264

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12870 cd/sqm



TEST NUMBER: P1294164

CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	19.3	7.9
10°-20°	50.1	20.5
20°-30°	62.7	25.7
30°-40°	56.0	22.9
40°-50°	32.8	13.4
50°-60°	11.3	4.6
60°-70°	6.9	2.8
70°-80°	3.8	1.6
80°-90°	1.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	132.1	54.1
0°-40°	188.1	77.1
0°-60°	232.3	95.2
0°-90°	244.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	244.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	209	
5°	206	19
15°	179	50
25°	137	63
35°	90	56
45°	42	33
55°	11	11
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1294164  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	209.2
2.5°	208.1
5°	205.8
7.5°	201.2
10°	195.4
12.5°	188.2
15°	179.3
17.5°	169.7
20°	159.1
22.5°	148.1
25°	136.9
27.5°	125.6
30°	114.4
32.5°	102.3
35°	89.9
37.5°	77.8
40°	66.3
42.5°	53.9
45°	41.5
47.5°	31.7
50°	23.1
52.5°	15.0
55°	10.7
57.5°	9.5
60°	8.6
62.5°	7.8
65°	6.9
67.5°	6.1
70°	5.2
72.5°	4.3
75°	3.5
77.5°	2.9
80°	2.3
82.5°	1.4
85°	0.9
87.5°	0.6
90°	0.0

(END OF REPORT)