

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294211

Luminaire Tested: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294211  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,  
E3DLP1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 635.0 lumens  
Efficiency: N/A  
Efficacy: 70.6 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294211  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K

### Luminous Intensity Polar Plot

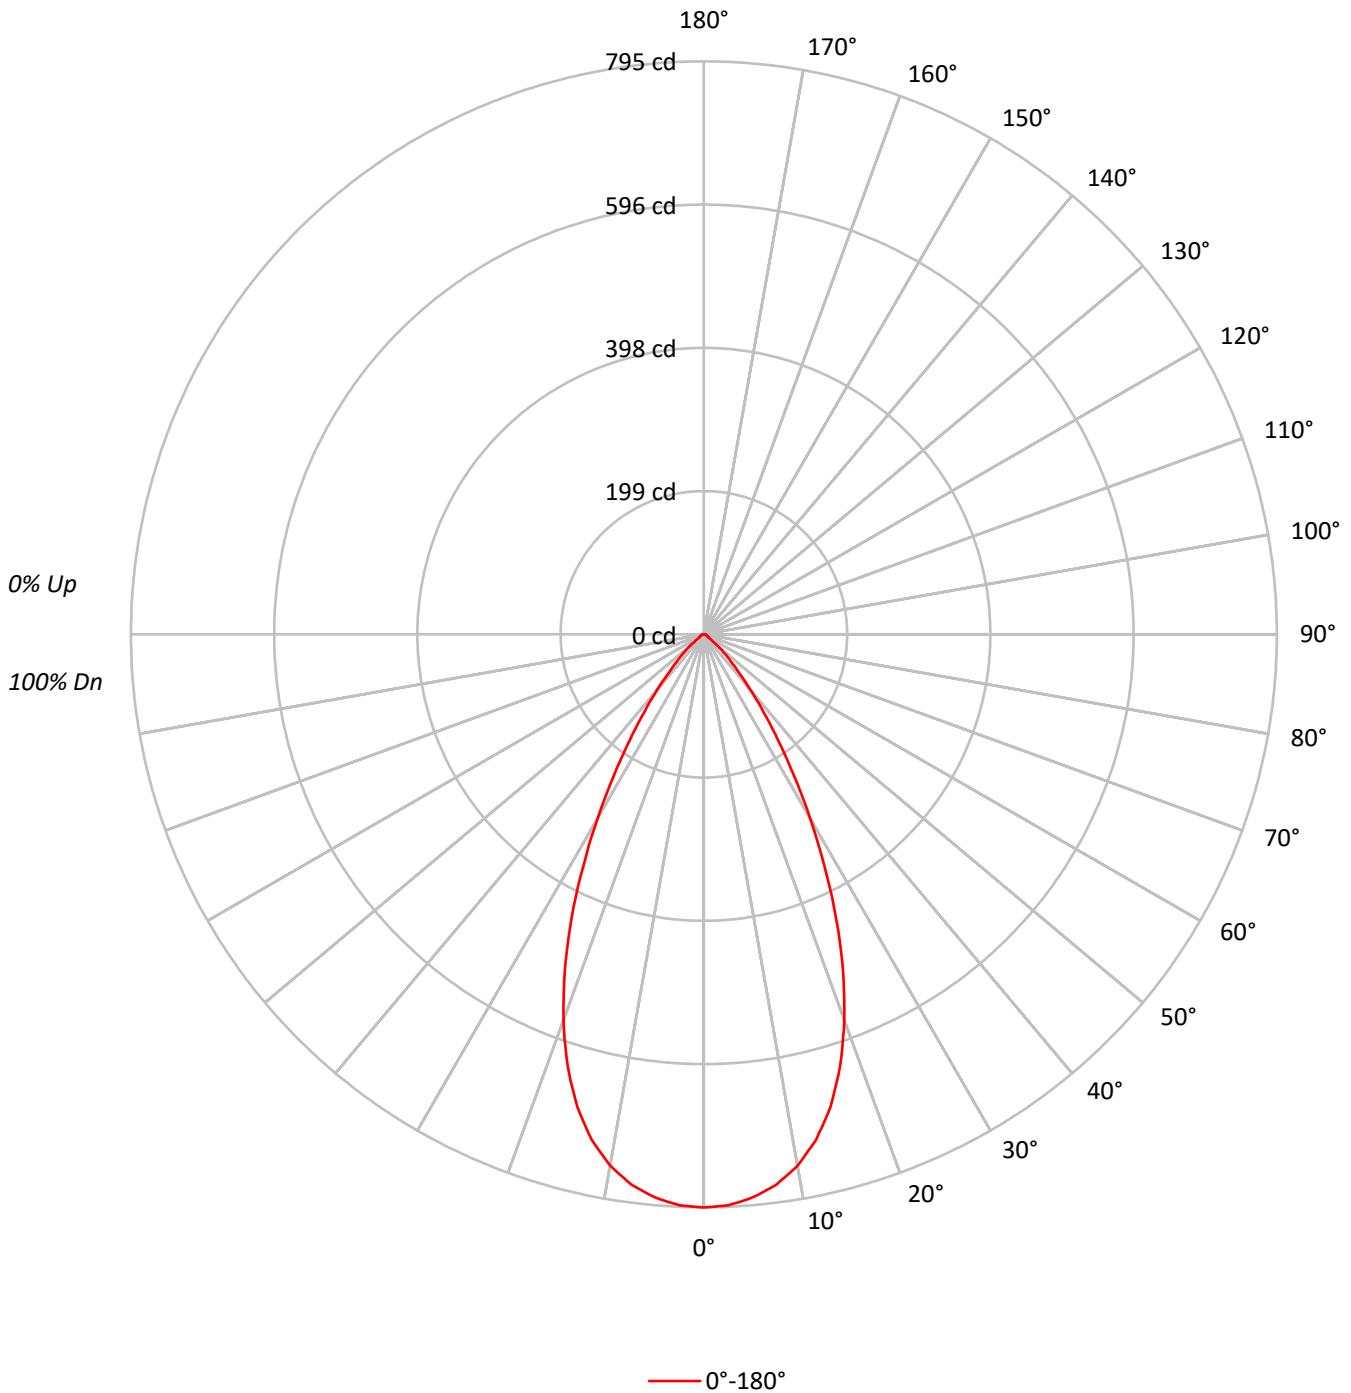



TEST NUMBER: P1294211  
 CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93	93	93	93
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87	87	87	87
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	85	82	81	81	81	81
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	82	79	77	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	68	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58	58	58	58
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55	55	55	55
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52	52	52	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	174372
5°	172595
10°	166686
15°	154076
20°	132942
25°	105006
30°	74492
35°	48024
40°	28854
45°	16250
50°	8733
55°	3135
60°	2807
65°	2698
70°	2629
75°	2457
80°	2147
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16250 cd/sqm



TEST NUMBER: P1294211  
 CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.7	11.6
10°-20°	187.7	29.6
20°-30°	196.7	31.0
30°-40°	114.7	18.1
40°-50°	42.9	6.8
50°-60°	10.1	1.6
60°-70°	5.2	0.8
70°-80°	3.1	0.5
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	458.1	72.1
0°-40°	572.8	90.2
0°-60°	625.9	98.6
0°-90°	635.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	635.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	795	
5°	784	74
15°	679	188
25°	434	197
35°	179	115
45°	52	43
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1294211  
CATALOG NUMBER: P3AS09R55W2N902750DE010 E3DLP1WH\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	795.2
2.5°	792.8
5°	784.1
7.5°	770.1
10°	748.6
12.5°	718.3
15°	678.7
17.5°	628.6
20°	569.7
22.5°	503.9
25°	434.0
27.5°	362.3
30°	294.2
32.5°	232.4
35°	179.4
37.5°	136.3
40°	100.8
42.5°	72.2
45°	52.4
47.5°	37.9
50°	25.6
52.5°	14.6
55°	8.2
57.5°	7.0
60°	6.4
62.5°	5.8
65°	5.2
67.5°	4.7
70°	4.1
72.5°	3.5
75°	2.9
77.5°	2.3
80°	1.7
82.5°	1.2
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)