

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294322

Luminaire Tested: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1294322
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRIS
Catalog Number: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 2700K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 219.0 lumens
Efficiency: N/A
Efficacy: 24.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1294322
CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K

Luminous Intensity Polar Plot

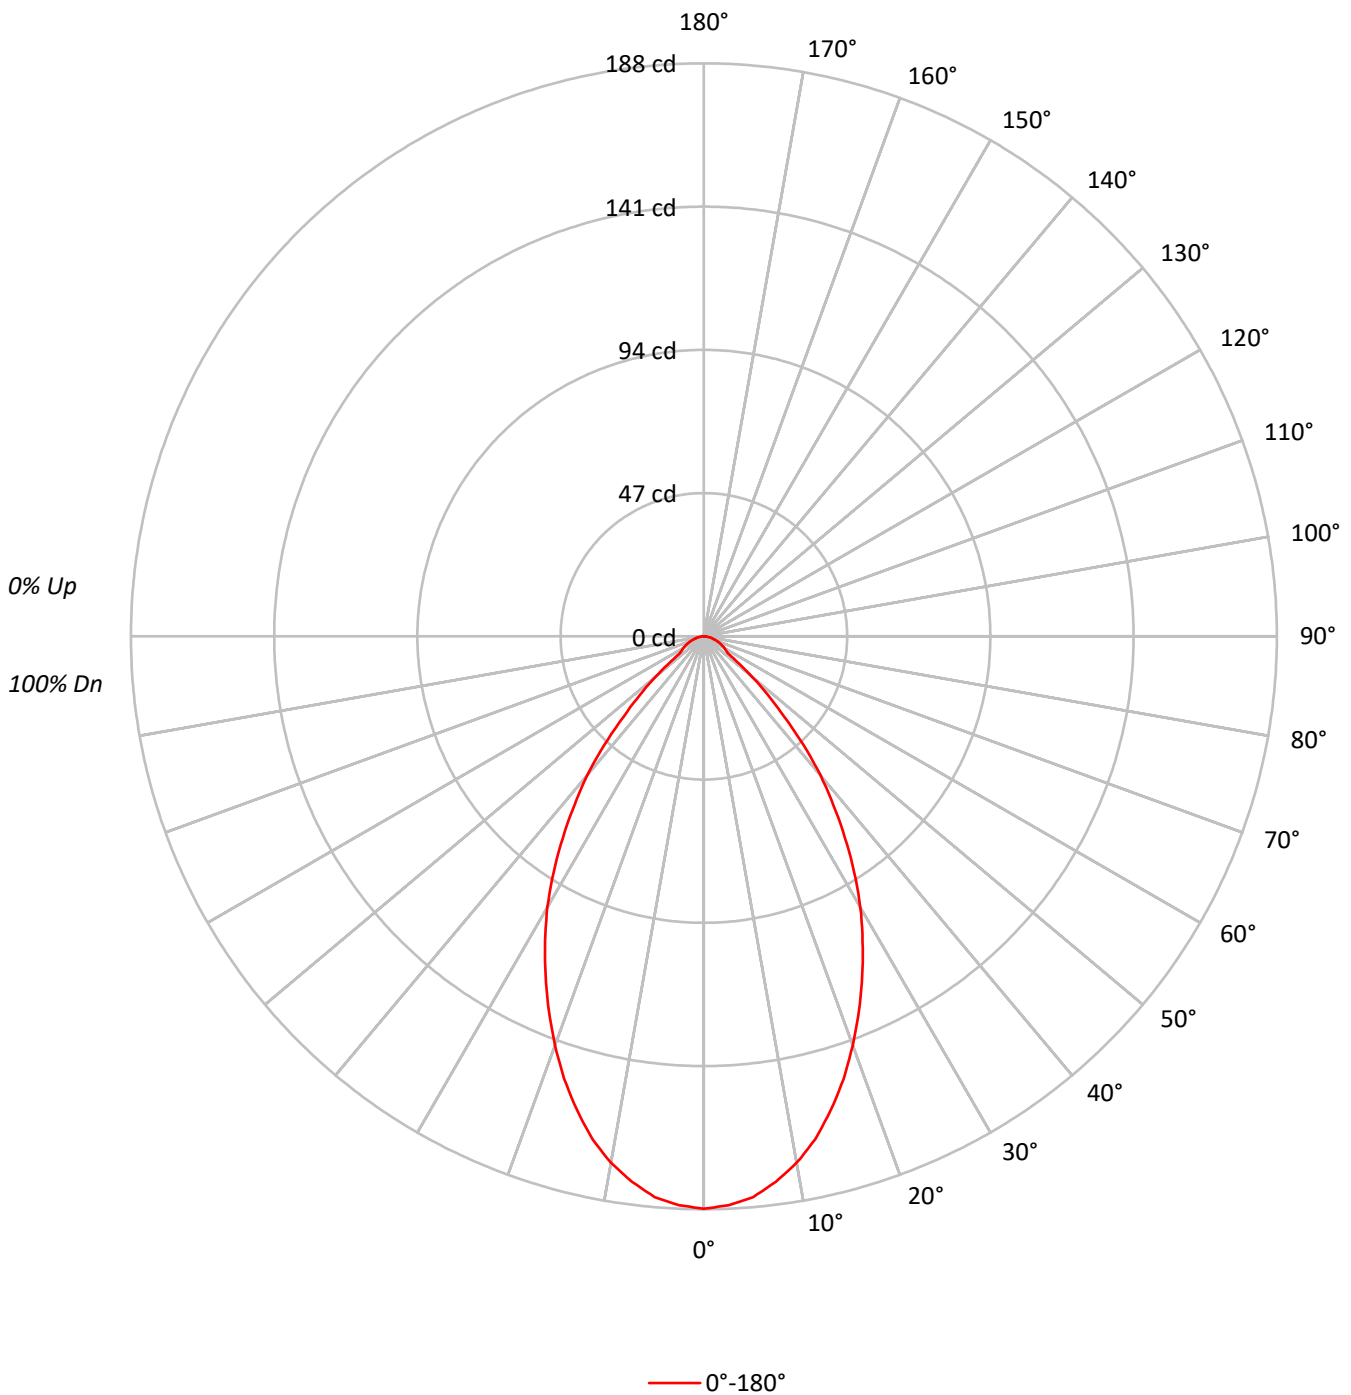



TEST NUMBER: P1294322
 CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91		
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82		
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74		
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68		
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	64	62		
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57		
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52		
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48		
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45		
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	41181
5°	40656
10°	39055
15°	36527
20°	33323
25°	29736
30°	26004
35°	21603
40°	17032
45°	11536
50°	7062
55°	3670
60°	3421
65°	3217
70°	3013
75°	2626
80°	2652
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11536 cd/sqm



TEST NUMBER: P1294322

CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.3	7.9
10°-20°	45.0	20.5
20°-30°	56.3	25.7
30°-40°	50.3	22.9
40°-50°	29.4	13.4
50°-60°	10.2	4.6
60°-70°	6.1	2.8
70°-80°	3.4	1.6
80°-90°	1.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	118.6	54.1
0°-40°	168.9	77.1
0°-60°	208.5	95.2
0°-90°	219.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	219.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	188	
5°	185	17
15°	161	45
25°	123	56
35°	81	50
45°	37	29
55°	10	10
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1294322
CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1GPH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	187.8
2.5°	186.8
5°	184.7
7.5°	180.5
10°	175.4
12.5°	168.9
15°	160.9
17.5°	152.3
20°	142.8
22.5°	132.9
25°	122.9
27.5°	112.8
30°	102.7
32.5°	91.8
35°	80.7
37.5°	69.8
40°	59.5
42.5°	48.4
45°	37.2
47.5°	28.5
50°	20.7
52.5°	13.5
55°	9.6
57.5°	8.5
60°	7.8
62.5°	7.0
65°	6.2
67.5°	5.4
70°	4.7
72.5°	3.9
75°	3.1
77.5°	2.6
80°	2.1
82.5°	1.3
85°	0.8
87.5°	0.5
90°	0.0

(END OF REPORT)