

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294356

Luminaire Tested: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294356  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 5000K CCT AND, 90CRI ,  
E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 498.0 lumens  
Efficiency: N/A  
Efficacy: 55.3 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294356  
CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K

### Luminous Intensity Polar Plot

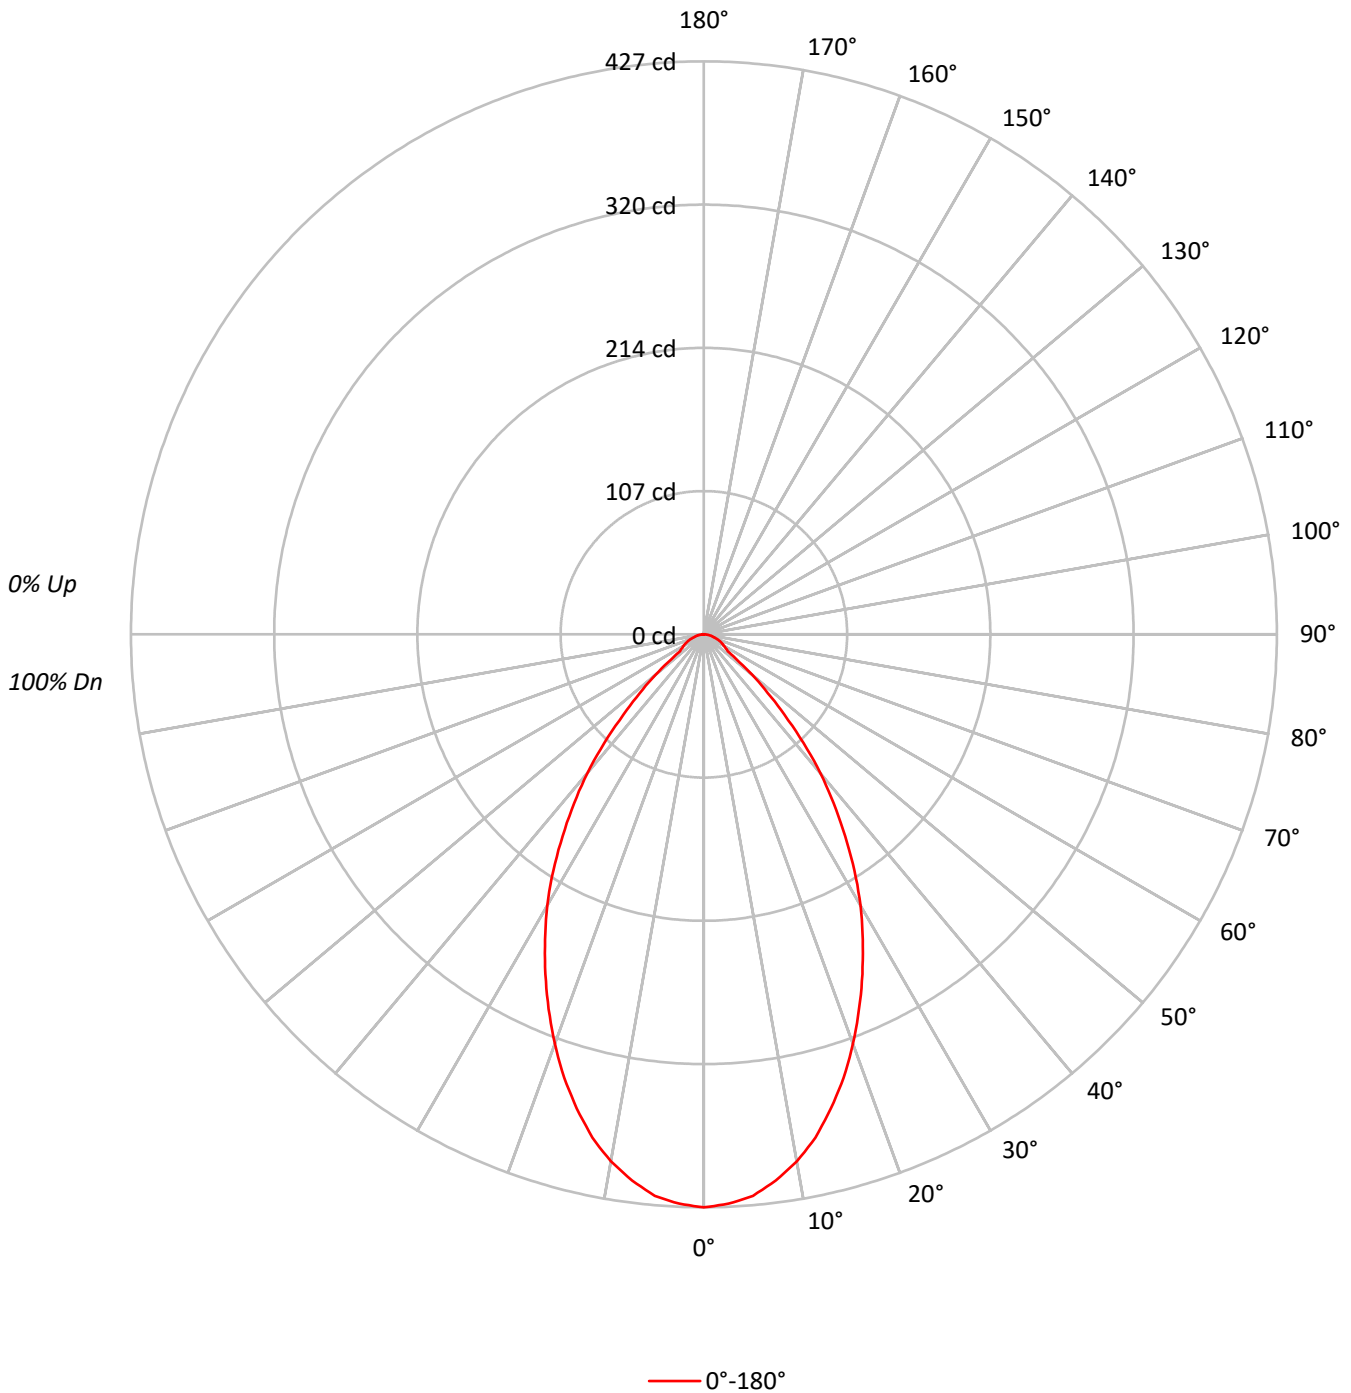



TEST NUMBER: P1294356

CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91		
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82		
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74		
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68		
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	64	62		
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57		
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52		
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48		
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45		
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	93633
5°	92450
10°	88798
15°	83042
20°	75770
25°	67601
30°	59123
35°	49122
40°	38730
45°	26266
50°	16068
55°	8334
60°	7719
65°	7316
70°	6796
75°	6015
80°	5935
85°	4529

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 26266 cd/sqm



TEST NUMBER: P1294356

CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	39.4	7.9
10°-20°	102.3	20.5
20°-30°	128.0	25.7
30°-40°	114.3	23.0
40°-50°	66.9	13.4
50°-60°	23.1	4.6
60°-70°	14.0	2.8
70°-80°	7.8	1.6
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	269.7	54.1
0°-40°	384.0	77.1
0°-60°	474.0	95.2
0°-90°	498.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	498.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	427	
5°	420	39
15°	366	102
25°	279	128
35°	184	114
45°	85	67
55°	22	23
65°	14	14
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P1294356  
CATALOG NUMBER: P3AS09R55W2N902765DE010 E3DLD1WMH\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	427.0
2.5°	424.7
5°	420.0
7.5°	410.5
10°	398.8
12.5°	384.1
15°	365.8
17.5°	346.4
20°	324.7
22.5°	302.3
25°	279.4
27.5°	256.4
30°	233.5
32.5°	208.8
35°	183.5
37.5°	158.8
40°	135.3
42.5°	110.0
45°	84.7
47.5°	64.7
50°	47.1
52.5°	30.6
55°	21.8
57.5°	19.4
60°	17.6
62.5°	15.9
65°	14.1
67.5°	12.4
70°	10.6
72.5°	8.8
75°	7.1
77.5°	5.9
80°	4.7
82.5°	2.9
85°	1.8
87.5°	1.2
90°	0.0

(END OF REPORT)