

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294483

Luminaire Tested: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294483  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 238.0 lumens  
Efficiency: N/A  
Efficacy: 26.4 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294483  
CATALOG NUMBER: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

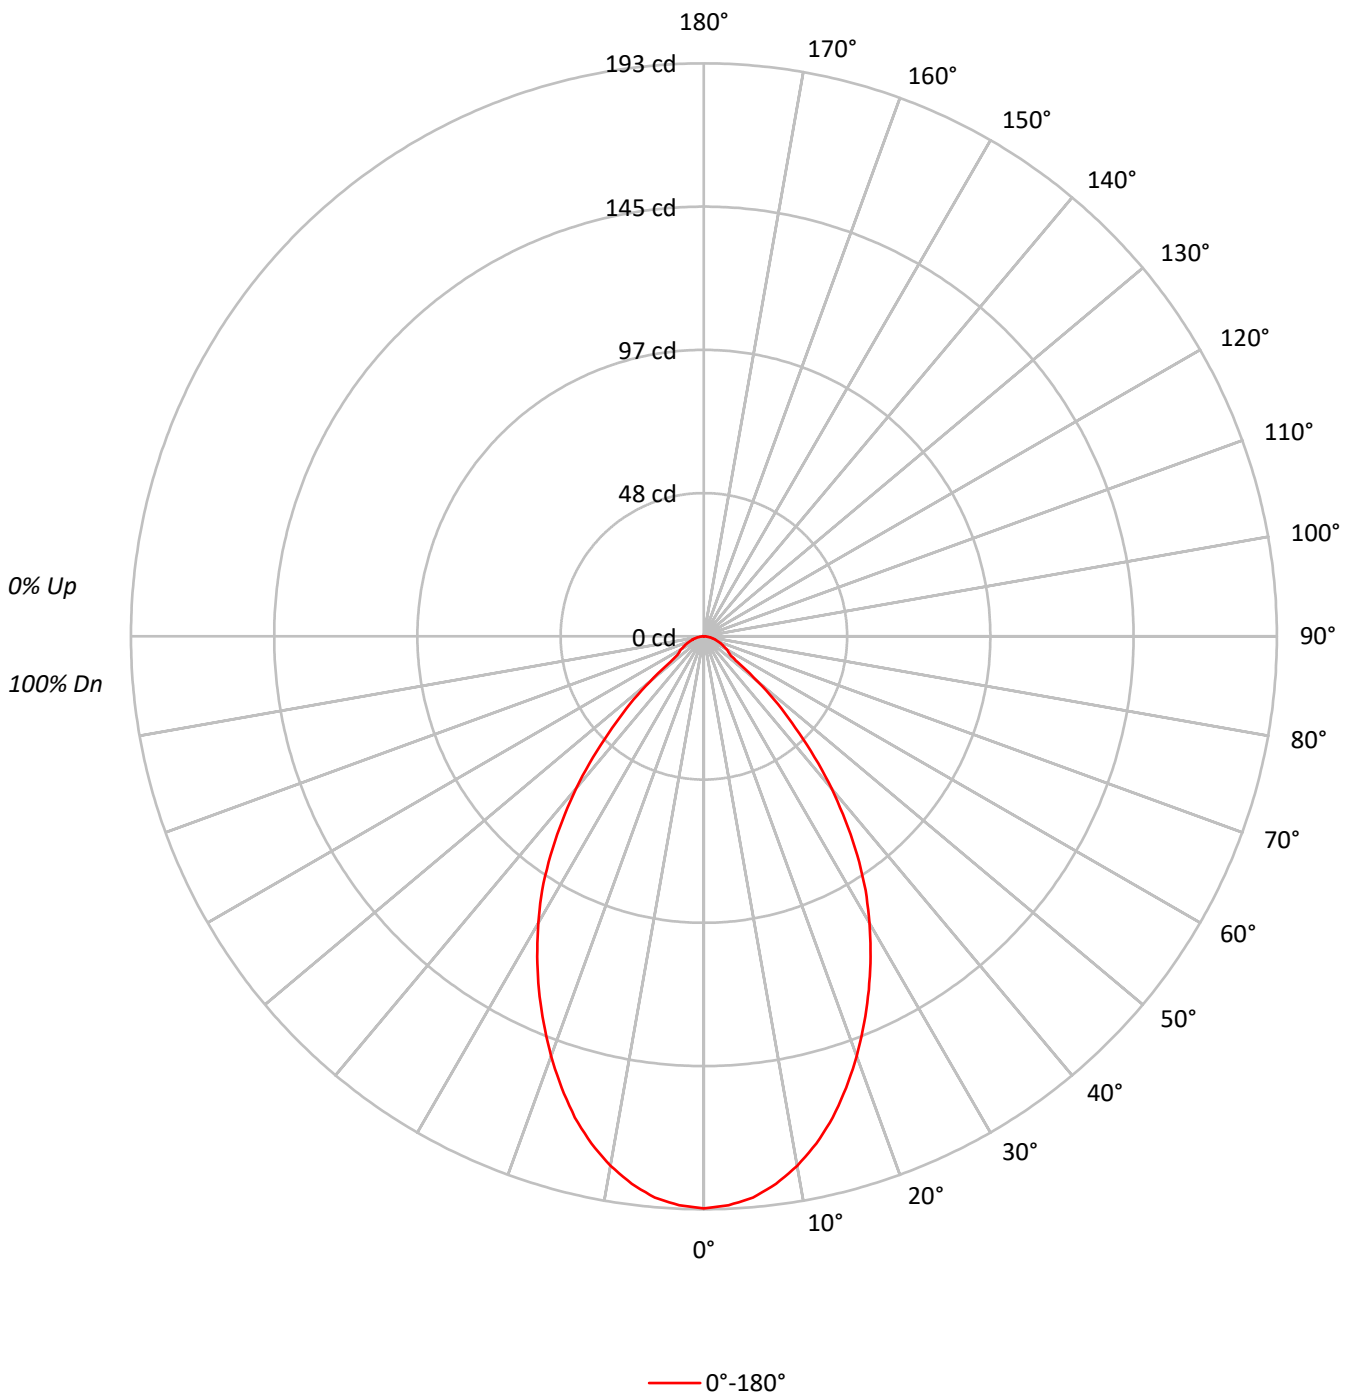



TEST NUMBER: P1294483  
 CATALOG NUMBER: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	42255
5°	41778
10°	40324
15°	38093
20°	35120
25°	31792
30°	28232
35°	24119
40°	19179
45°	13521
50°	8085
55°	4091
60°	3947
65°	3580
70°	3334
75°	3219
80°	2904
85°	2264

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13521 cd/sqm



TEST NUMBER: P1294483

CATALOG NUMBER: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	17.8	7.5
10°-20°	46.9	19.7
20°-30°	60.2	25.3
30°-40°	55.8	23.5
40°-50°	34.0	14.3
50°-60°	11.3	4.8
60°-70°	6.9	2.9
70°-80°	3.9	1.6
80°-90°	1.1	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	125.0	52.5
0°-40°	180.8	76.0
0°-60°	226.1	95.0
0°-90°	238.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	238.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	193	
5°	190	18
15°	168	47
25°	131	60
35°	90	56
45°	44	34
55°	11	11
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1294483  
CATALOG NUMBER: P3AS09R60W2N902750DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	192.7
2.5°	191.8
5°	189.8
7.5°	186.0
10°	181.1
12.5°	175.0
15°	167.8
17.5°	159.4
20°	150.5
22.5°	141.0
25°	131.4
27.5°	121.6
30°	111.5
32.5°	101.4
35°	90.1
37.5°	78.3
40°	67.0
42.5°	55.2
45°	43.6
47.5°	33.8
50°	23.7
52.5°	14.2
55°	10.7
57.5°	9.8
60°	9.0
62.5°	7.8
65°	6.9
67.5°	6.1
70°	5.2
72.5°	4.3
75°	3.8
77.5°	2.9
80°	2.3
82.5°	1.4
85°	0.9
87.5°	0.6
90°	0.0

(END OF REPORT)