

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294588

Luminaire Tested: P3AS09R60W2N902765DE010 E3D1MW\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294588  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R60W2N902765DE010 E3D1MW\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,  
E3D1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 754.0 lumens  
Efficiency: N/A  
Efficacy: 83.8 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294588  
CATALOG NUMBER: P3AS09R60W2N902765DE010 E3D1MW\_3000K

### Luminous Intensity Polar Plot

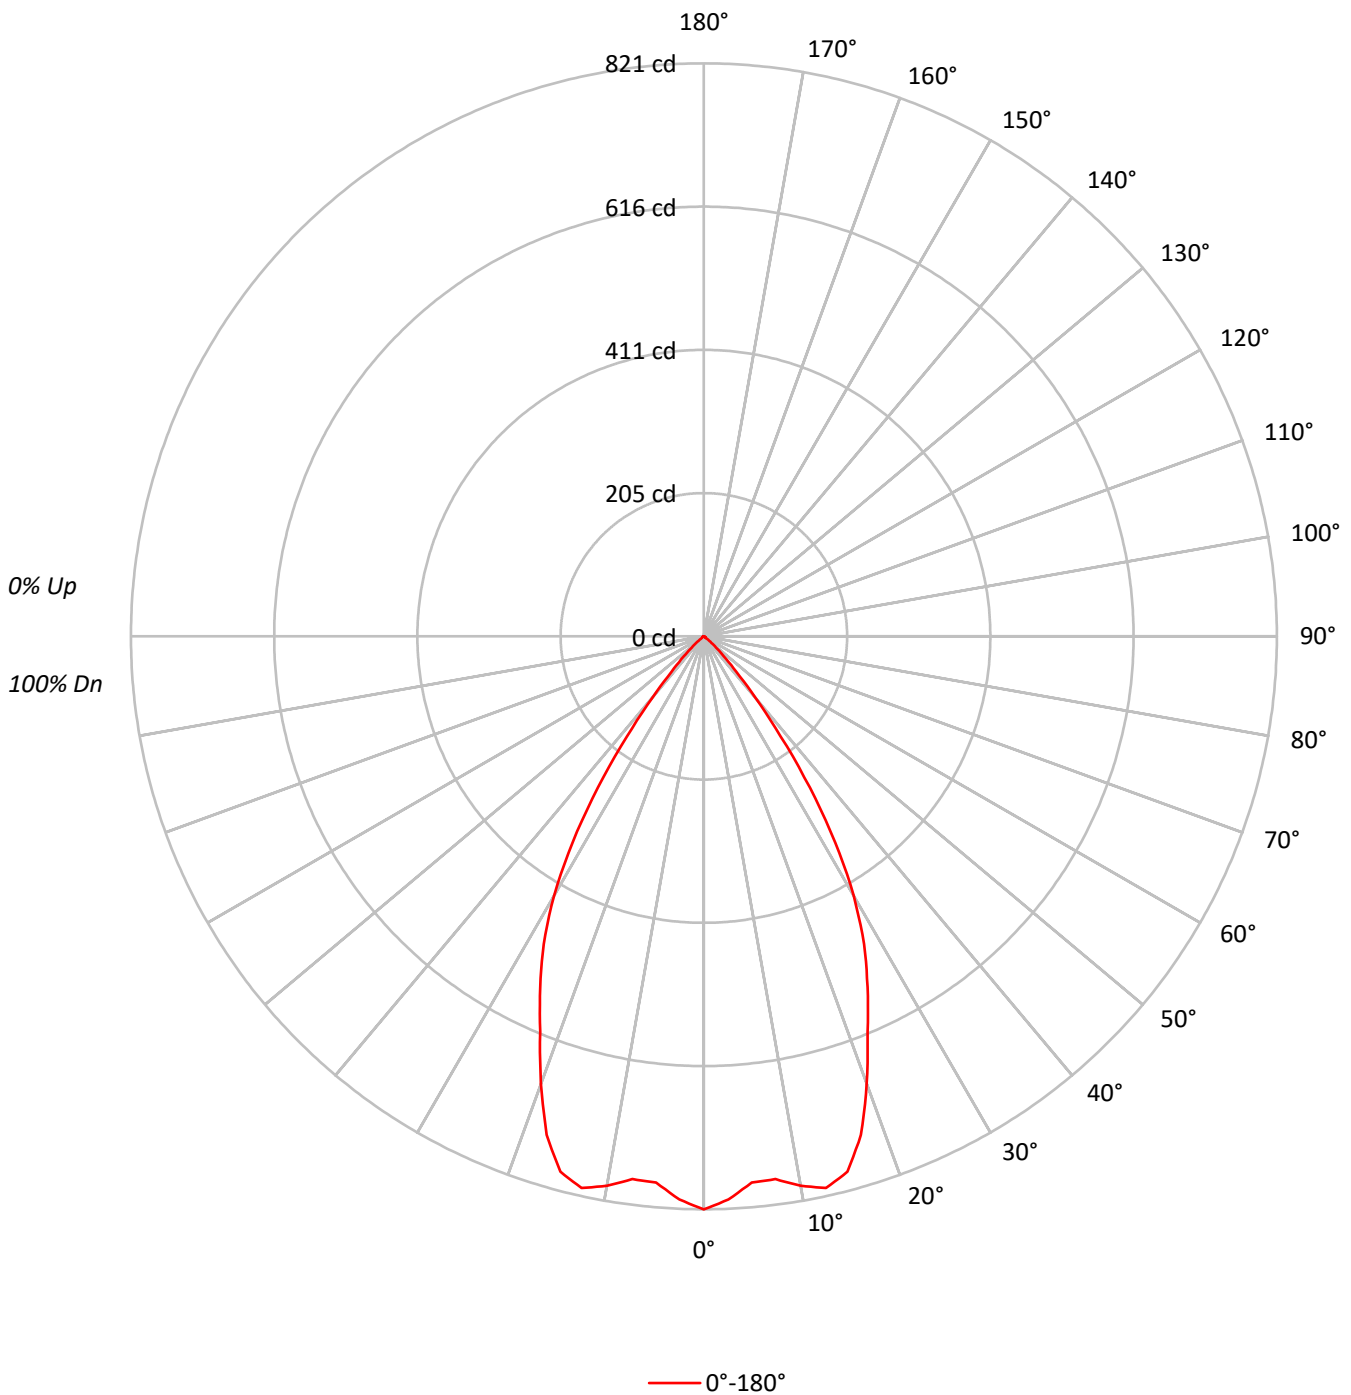



TEST NUMBER: P1294588

CATALOG NUMBER: P3AS09R60W2N902765DE010 E3D1MW\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94	94	94	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81	81	81	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76	76	76	76
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71	71	71	71
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	70	68	66	66	66	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62	62	62	62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	63	59	58	58	58	58
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55	55	55	55
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51	51	51	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	180051
5°	172903
10°	178019
15°	180319
20°	159217
25°	134185
30°	108827
35°	70885
40°	32547
45°	12466
50°	4162
55°	1109
60°	1009
65°	882
70°	769
75°	1017
80°	758
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12466 cd/sqm



TEST NUMBER: P1294588

CATALOG NUMBER: P3AS09R60W2N902765DE010 E3D1MW\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	75.6	10.0
10°-20°	217.5	28.8
20°-30°	253.7	33.6
30°-40°	163.7	21.7
40°-50°	36.7	4.9
50°-60°	3.6	0.5
60°-70°	1.7	0.2
70°-80°	1.0	0.1
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	546.8	72.5
0°-40°	710.5	94.2
0°-60°	750.8	99.6
0°-90°	754.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	754.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	821	
5°	786	76
15°	794	218
25°	555	254
35°	265	164
45°	40	37
55°	3	4
65°	2	2
75°	1	1
85°	1	0
90°	0	



TEST NUMBER: P1294588  
CATALOG NUMBER: P3AS09R60W2N902765DE010 E3D1MW\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	821.1
2.5°	807.7
5°	785.5
7.5°	784.4
10°	799.5
12.5°	809.4
15°	794.3
17.5°	748.8
20°	682.3
22.5°	612.9
25°	554.6
27.5°	497.4
30°	429.8
32.5°	350.5
35°	264.8
37.5°	180.8
40°	113.7
42.5°	68.2
45°	40.2
47.5°	23.3
50°	12.2
52.5°	4.1
55°	2.9
57.5°	2.3
60°	2.3
62.5°	1.7
65°	1.7
67.5°	1.7
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0

(END OF REPORT)