

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294865

Luminaire Tested: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294865  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,  
E3CB1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 721.0 lumens  
Efficiency: N/A  
Efficacy: 80.1 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294865  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K

### Luminous Intensity Polar Plot

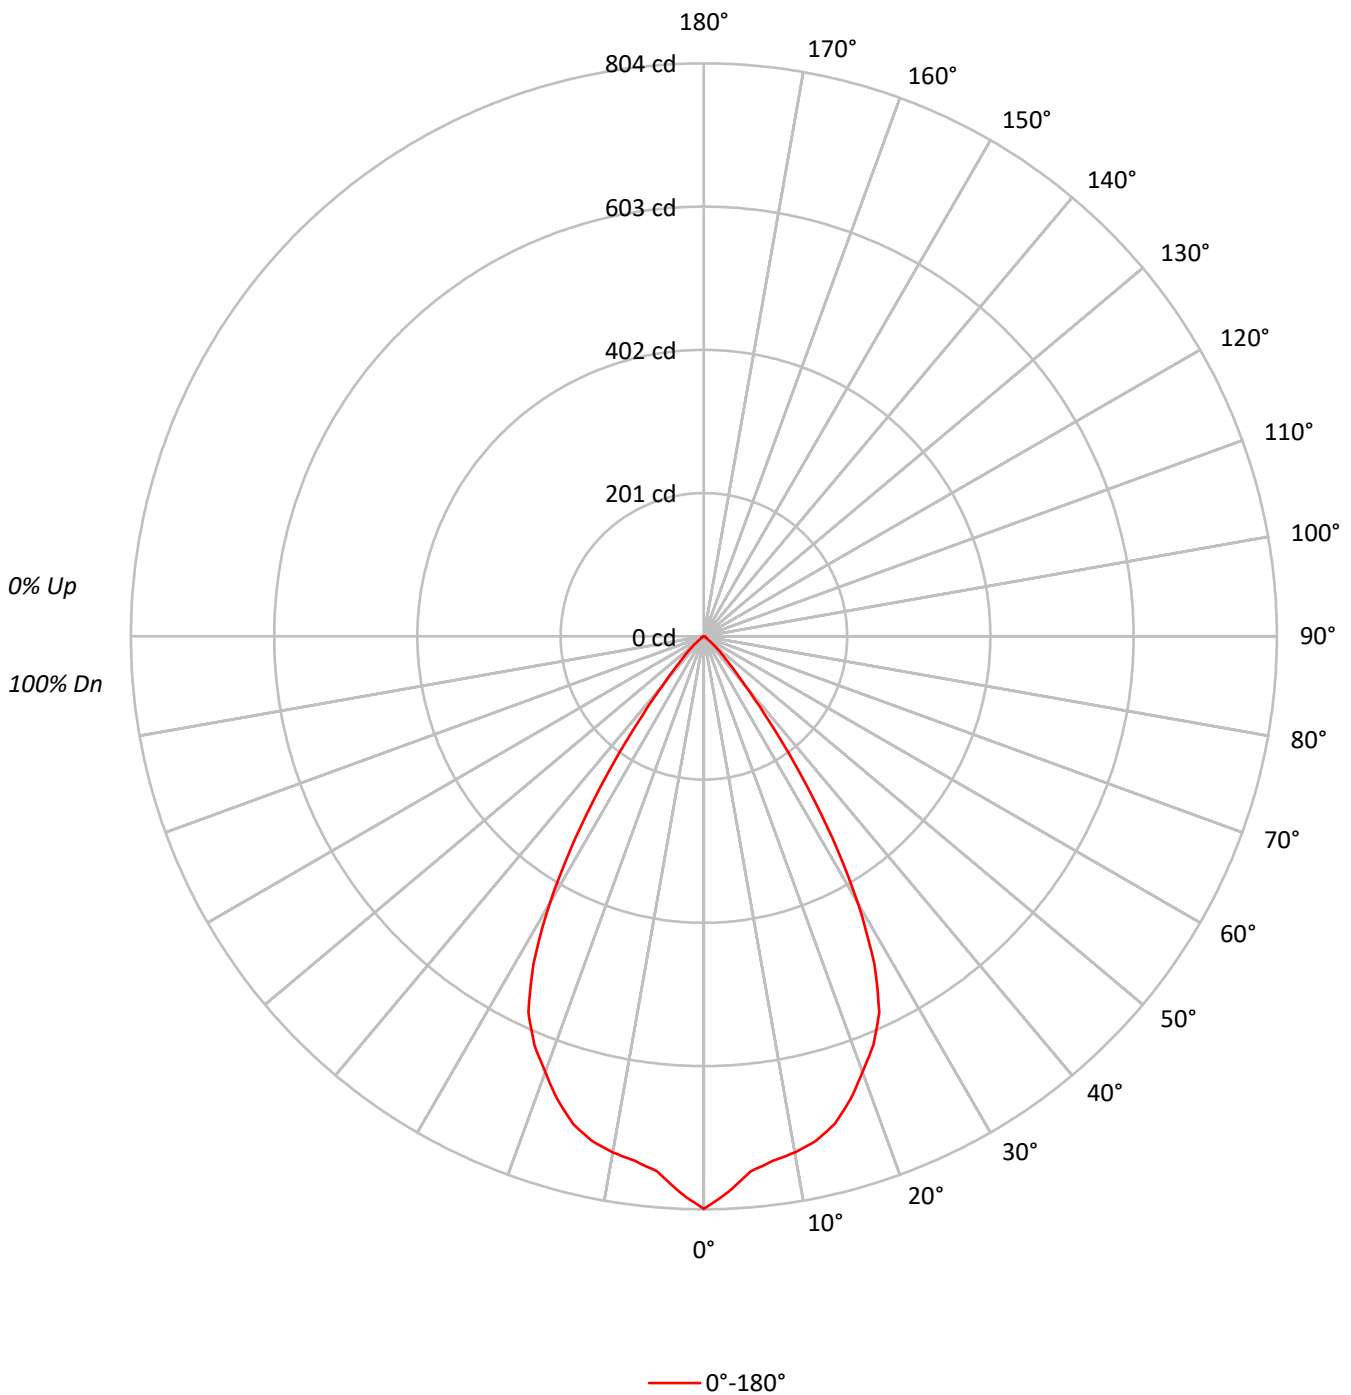



TEST NUMBER: P1294865  
 CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81	81	81	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75	75	75	75
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51	51	51	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	176192
5°	165837
10°	163724
15°	160841
20°	151843
25°	140936
30°	109561
35°	63363
40°	25534
45°	11753
50°	4571
55°	1797
60°	1535
65°	1505
70°	1475
75°	1440
80°	1515
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11753 cd/sqm



TEST NUMBER: P1294865  
 CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.6	9.9
10°-20°	197.8	27.4
20°-30°	259.0	35.9
30°-40°	150.0	20.8
40°-50°	32.1	4.5
50°-60°	5.2	0.7
60°-70°	2.9	0.4
70°-80°	1.7	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	528.4	73.3
0°-40°	678.5	94.1
0°-60°	715.8	99.3
0°-90°	721.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	721.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	804	
5°	753	72
15°	708	198
25°	582	259
35°	237	150
45°	38	32
55°	5	5
65°	3	3
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1294865  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MMS\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	803.5
2.5°	780.8
5°	753.4
7.5°	742.3
10°	735.3
12.5°	725.4
15°	708.5
17.5°	682.2
20°	650.7
22.5°	621.0
25°	582.5
27.5°	517.8
30°	432.7
32.5°	335.3
35°	236.7
37.5°	149.9
40°	89.2
42.5°	56.0
45°	37.9
47.5°	24.5
50°	13.4
52.5°	6.4
55°	4.7
57.5°	4.1
60°	3.5
62.5°	3.5
65°	2.9
67.5°	2.3
70°	2.3
72.5°	1.7
75°	1.7
77.5°	1.2
80°	1.2
82.5°	0.6
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)