

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294870

Luminaire Tested: P3AS09R65W2N902765DE010 E3CB1MW\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294870  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R65W2N902765DE010 E3CB1MW\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 2700K CCT AND, 90CRI ,  
E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 654.0 lumens  
Efficiency: N/A  
Efficacy: 72.7 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294870  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MW\_2700K

### Luminous Intensity Polar Plot

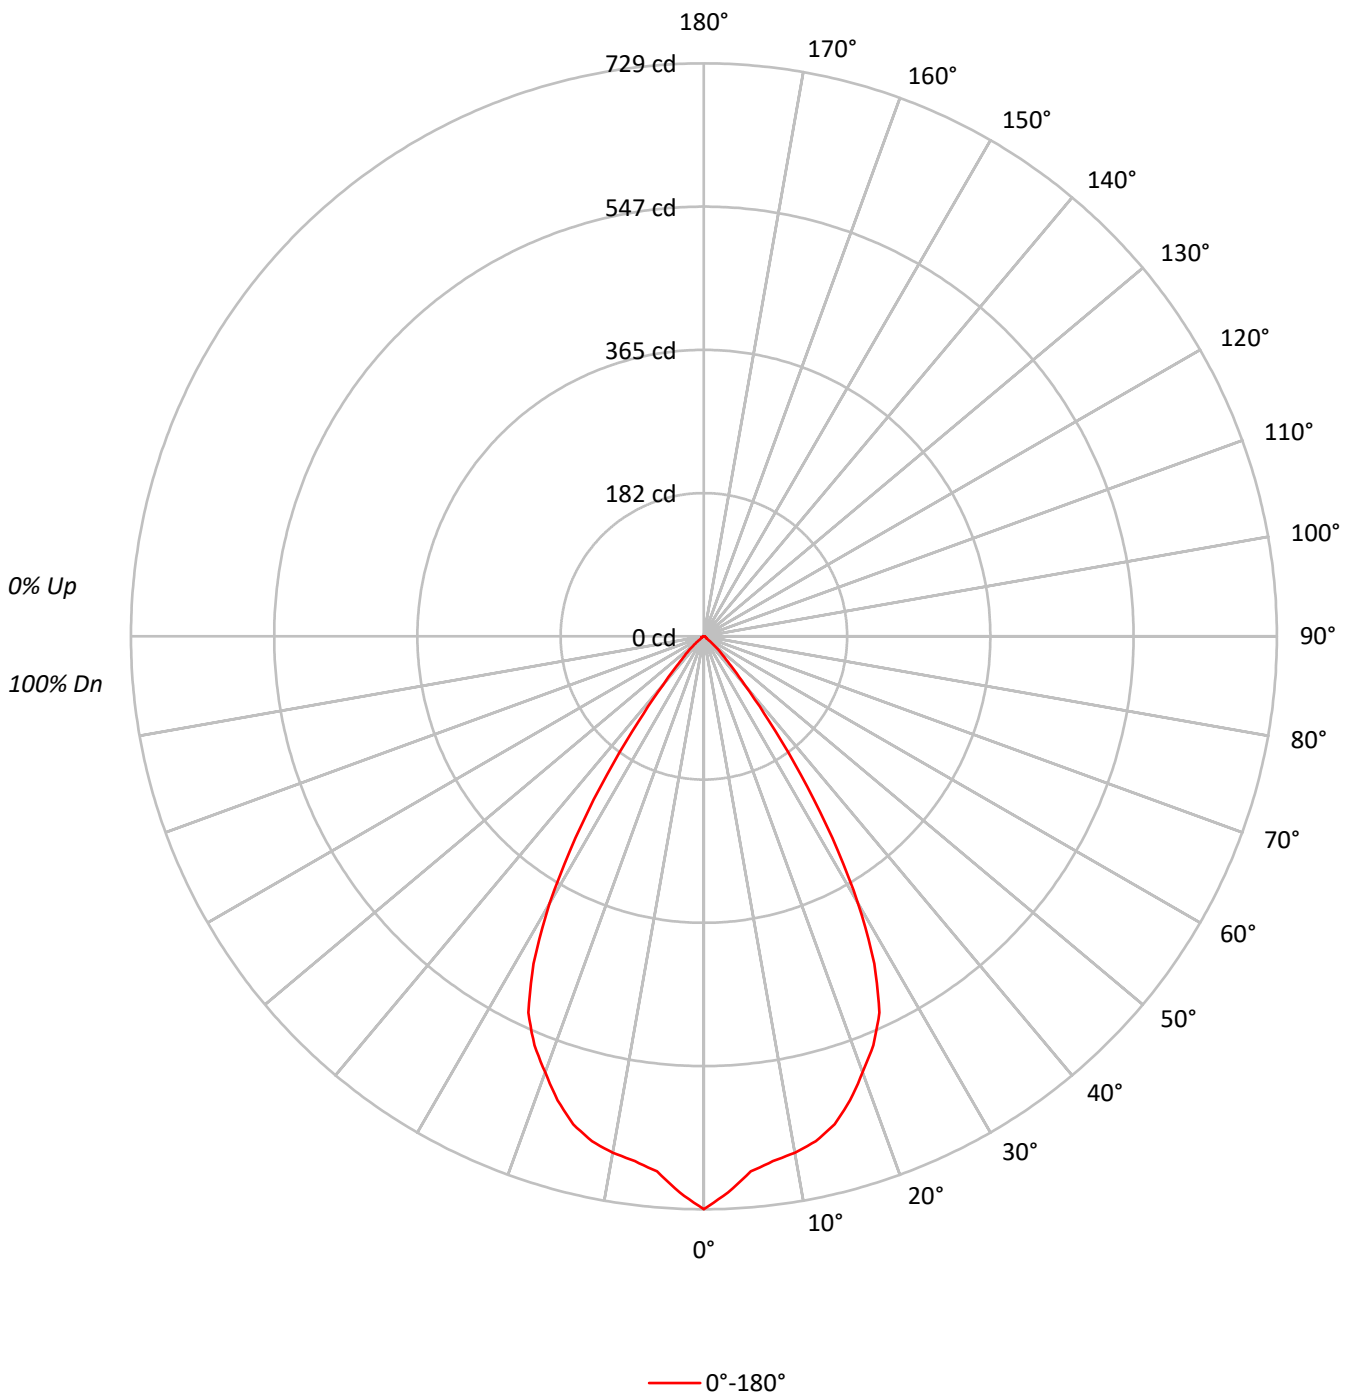



TEST NUMBER: P1294870  
 CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MW\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	159834
5°	150429
10°	148517
15°	145881
20°	137749
25°	127846
30°	99382
35°	57474
40°	23158
45°	10668
50°	4162
55°	1606
60°	1403
65°	1349
70°	1346
75°	1356
80°	1389
85°	1258

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10668 cd/sqm



TEST NUMBER: P1294870

CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MW\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	65.0	9.9
10°-20°	179.5	27.4
20°-30°	234.9	35.9
30°-40°	136.1	20.8
40°-50°	29.1	4.5
50°-60°	4.7	0.7
60°-70°	2.6	0.4
70°-80°	1.6	0.2
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	479.3	73.3
0°-40°	615.4	94.1
0°-60°	649.3	99.3
0°-90°	654.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	654.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	729	
5°	683	65
15°	643	179
25°	528	235
35°	215	136
45°	34	29
55°	4	5
65°	3	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1294870  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3CB1MW\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	728.9
2.5°	708.2
5°	683.4
7.5°	673.3
10°	667.0
12.5°	658.0
15°	642.6
17.5°	618.8
20°	590.3
22.5°	563.3
25°	528.4
27.5°	469.7
30°	392.5
32.5°	304.1
35°	214.7
37.5°	135.9
40°	80.9
42.5°	50.8
45°	34.4
47.5°	22.2
50°	12.2
52.5°	5.8
55°	4.2
57.5°	3.7
60°	3.2
62.5°	3.2
65°	2.6
67.5°	2.1
70°	2.1
72.5°	1.6
75°	1.6
77.5°	1.1
80°	1.1
82.5°	0.5
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)