

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294921

Luminaire Tested: P3AS09R65W2N902765DE010 E3D1WMH_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1294921
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R65W2N902765DE010 E3D1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 4000K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 706.0 lumens
Efficiency: N/A
Efficacy: 78.4 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1294921
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3D1WMH_4000K

Luminous Intensity Polar Plot

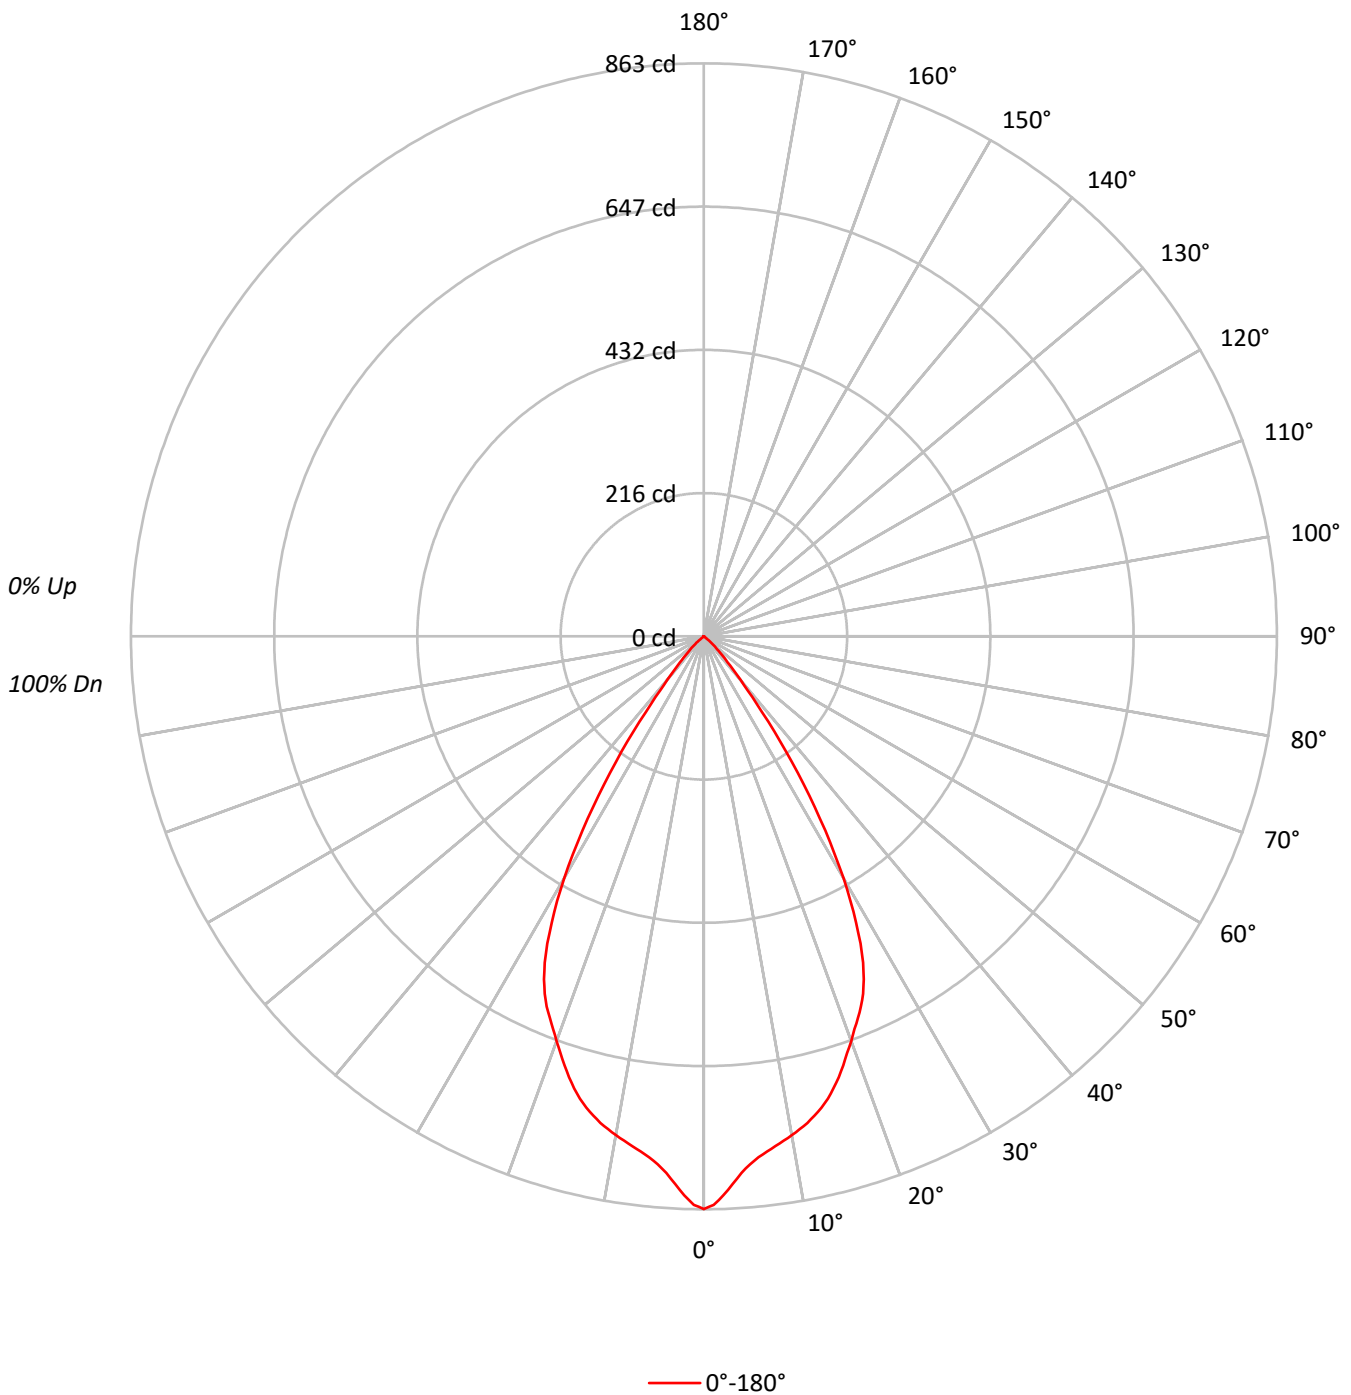



TEST NUMBER: P1294921

CATALOG NUMBER: P3AS09R65W2N902765DE010 E3D1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.3	10.7
10°-20°	200.9	28.5
20°-30°	254.3	36.0
30°-40°	144.8	20.5
40°-50°	28.8	4.1
50°-60°	1.5	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	530.5	75.1
0°-40°	675.3	95.6
0°-60°	705.6	99.9
0°-90°	706.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	706.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	863	
5°	798	75
15°	721	201
25°	570	254
35°	231	145
45°	34	29
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1294921
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	862.7
1°	856.3
2°	842.4
3°	826.2
4°	810.2
5°	798.0
6°	789.0
7°	781.8
8°	775.4
9°	769.0
10°	762.9
11°	756.2
12°	749.3
13°	740.8
14°	731.8
15°	721.1
16°	708.3
17°	694.4
18°	679.3
19°	663.4
20°	648.6
21°	633.5
22°	619.8
23°	605.6
24°	589.1
25°	569.9
26°	547.0
27°	519.4
28°	488.4
29°	455.3
30°	420.8
31°	382.8
32°	345.0
32.5°	325.6
33°	306.7
34°	268.4
35°	230.7
36°	195.9
37°	161.3
37.5°	143.6
38°	129.4
39°	104.8
40°	85.6
42.5°	52.8
45°	33.7



TEST NUMBER: P1294921
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	19.7
50°	7.3
52.5°	1.5
55°	0.9
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)