

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294982

Luminaire Tested: P3AS09R65W2N902765DE010 E3DLD1MW\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1294982  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R65W2N902765DE010 E3DLD1MW\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 5000K CCT AND, 90CRI ,  
E3DLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 463.0 lumens  
Efficiency: N/A  
Efficacy: 51.4 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1294982  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLD1MW\_5000K

### Luminous Intensity Polar Plot

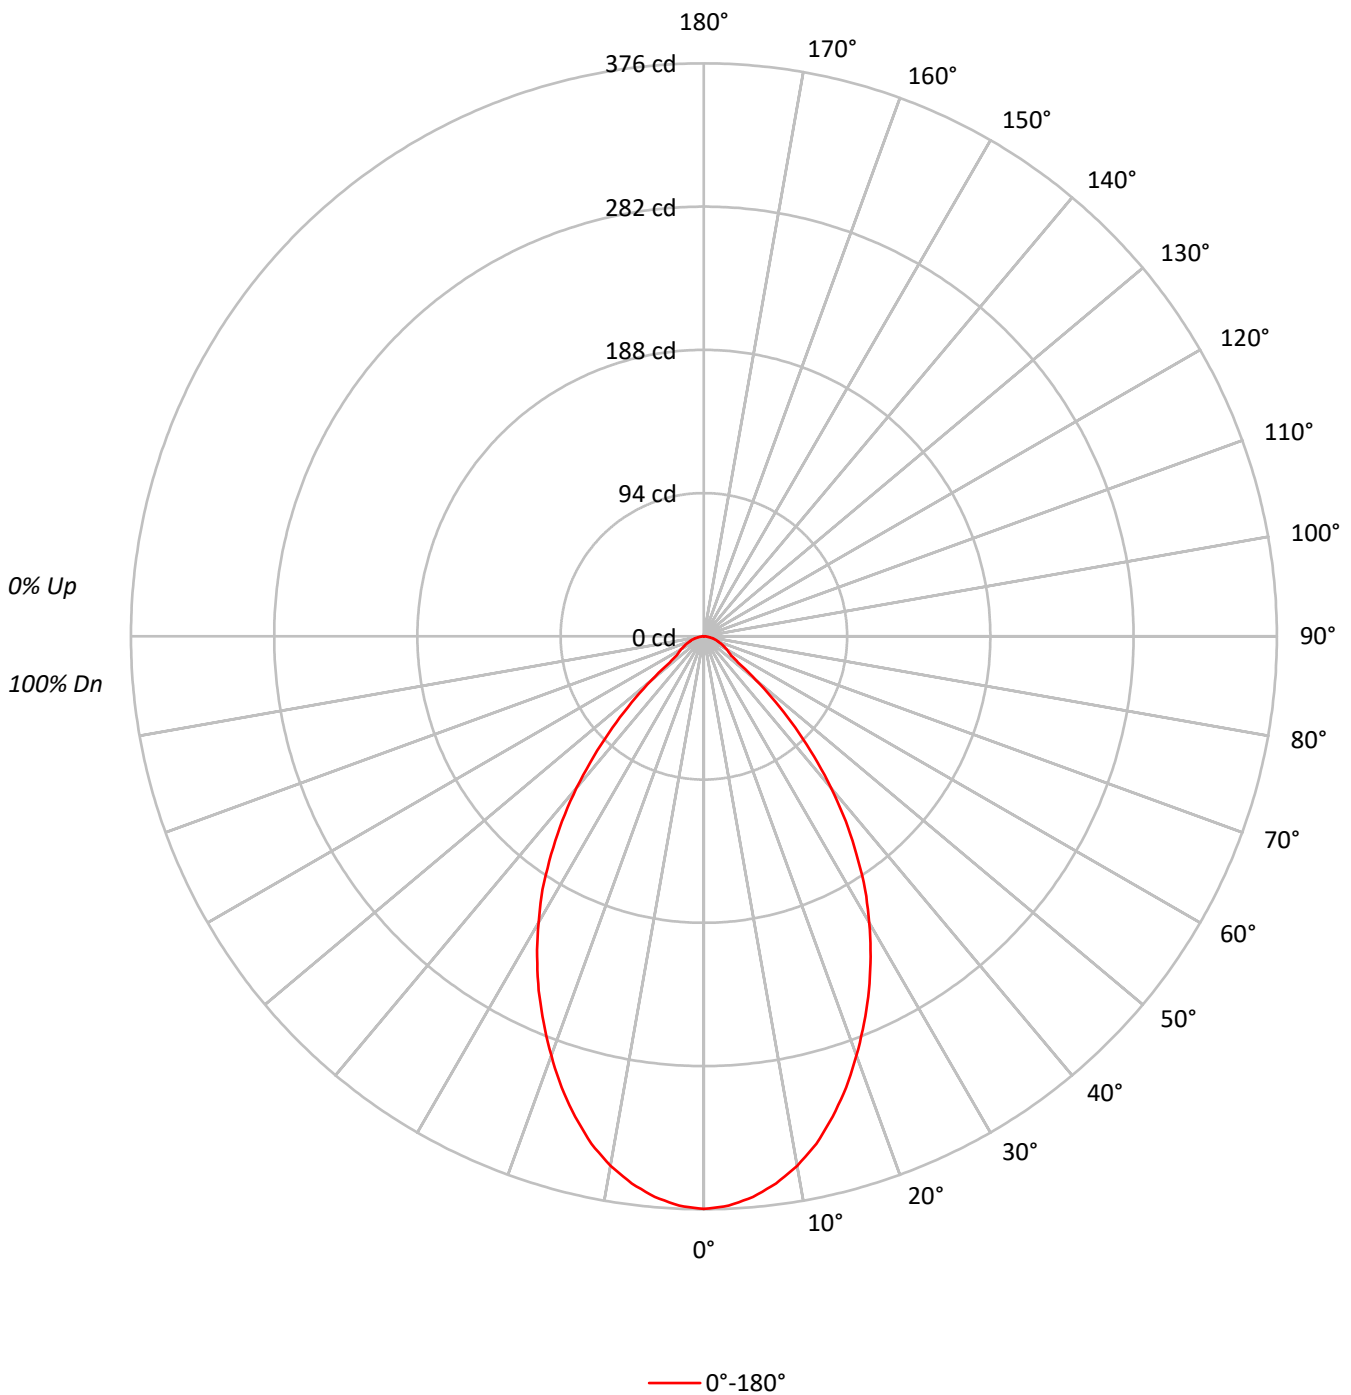





TEST NUMBER: P1294982  
 CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLD1MW\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	34.7	7.5
10°-20°	91.3	19.7
20°-30°	117.3	25.3
30°-40°	108.6	23.4
40°-50°	65.5	14.2
50°-60°	22.4	4.8
60°-70°	13.5	2.9
70°-80°	7.6	1.6
80°-90°	2.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	243.4	52.6
0°-40°	351.9	76.0
0°-60°	439.8	95.0
0°-90°	463.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	463.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	376	
5°	369	35
15°	326	91
25°	256	117
35°	175	109
45°	85	66
55°	22	22
65°	14	13
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P1294982  
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLD1MW\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	375.7
2.5°	374.0
5°	369.3
7.5°	362.2
10°	352.8
12.5°	341.0
15°	326.3
17.5°	310.5
20°	292.8
22.5°	274.6
25°	256.4
27.5°	237.0
30°	217.0
32.5°	197.0
35°	174.6
37.5°	152.9
40°	130.0
42.5°	107.0
45°	84.7
47.5°	64.1
50°	44.7
52.5°	28.2
55°	21.8
57.5°	19.4
60°	17.6
62.5°	15.3
65°	13.5
67.5°	11.8
70°	10.0
72.5°	8.8
75°	7.1
77.5°	5.9
80°	4.1
82.5°	2.9
85°	1.8
87.5°	1.2
90°	0.0

(END OF REPORT)