

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1294997

Luminaire Tested: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1294997
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 198.0 lumens
Efficiency: N/A
Efficacy: 22.0 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1294997
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

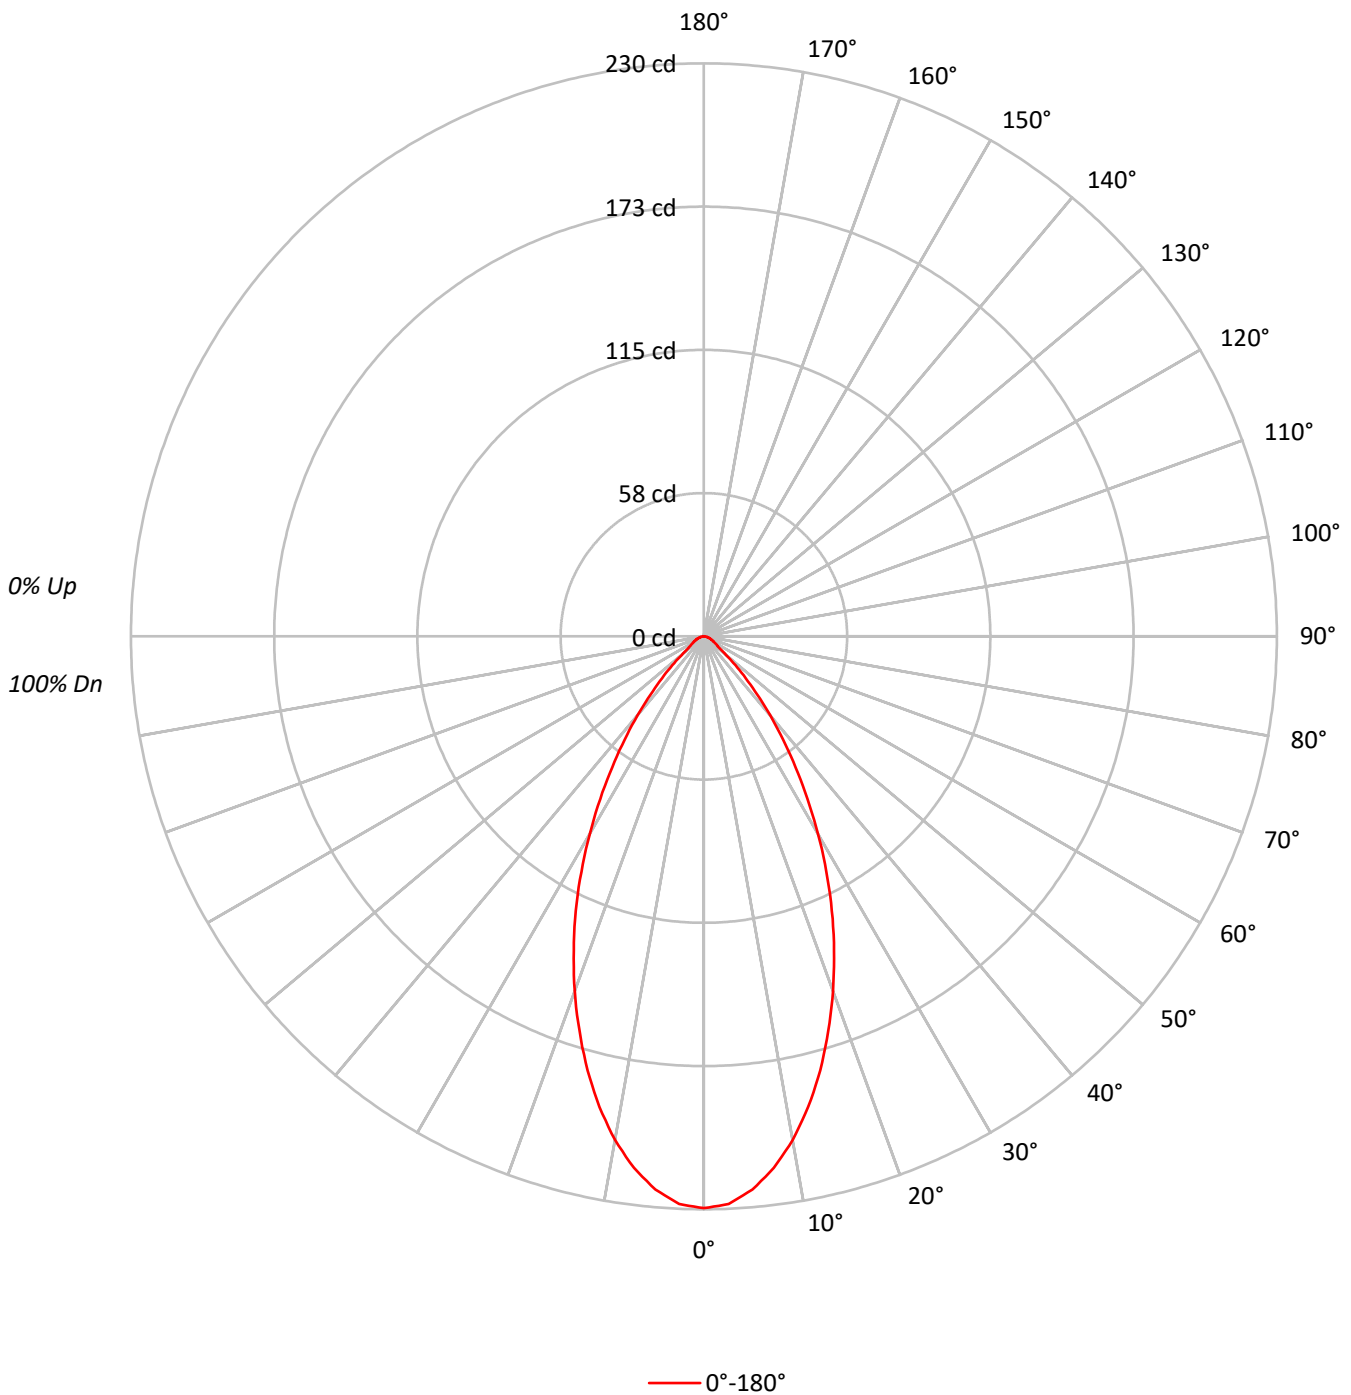



TEST NUMBER: P1294997
 CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	90	88	86	85				85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				78
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72				72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66				66
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62				62
7	81	71	65	60	79	70	64	60	69	63	60	68	63	59	67	62	59	57				57
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54				54
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50				50
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50325
5°	49064
10°	45713
15°	40954
20°	35376
25°	29421
30°	23193
35°	17186
40°	11851
45°	7350
50°	3991
55°	2523
60°	2149
65°	1920
70°	1667
75°	1440
80°	1389
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7350 cd/sqm



TEST NUMBER: P1294997

CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.7	10.5
10°-20°	50.1	25.3
20°-30°	55.4	28.0
30°-40°	40.3	20.3
40°-50°	18.9	9.5
50°-60°	6.4	3.2
60°-70°	3.7	1.9
70°-80°	1.9	1.0
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	126.3	63.8
0°-40°	166.6	84.1
0°-60°	191.8	96.9
0°-90°	198.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	198.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	230	
5°	223	21
15°	180	50
25°	122	55
35°	64	40
45°	24	19
55°	7	6
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1294997
CATALOG NUMBER: P3AS09R65W2N902765DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	229.5
2.5°	228.1
5°	222.9
7.5°	215.2
10°	205.3
12.5°	193.5
15°	180.4
17.5°	166.1
20°	151.6
22.5°	136.5
25°	121.6
27.5°	106.5
30°	91.6
32.5°	77.4
35°	64.2
37.5°	52.2
40°	41.4
42.5°	31.7
45°	23.7
47.5°	17.1
50°	11.7
52.5°	8.0
55°	6.6
57.5°	5.7
60°	4.9
62.5°	4.3
65°	3.7
67.5°	3.1
70°	2.6
72.5°	2.3
75°	1.7
77.5°	1.4
80°	1.1
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)