

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295052

Luminaire Tested: P3AS09R70W2N902750DE010 E3CD1MMS_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295052
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R70W2N902750DE010 E3CD1MMS_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 2700K CCT AND, 90CRI , E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 661.0 lumens
Efficiency: N/A
Efficacy: 73.4 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295052
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3CD1MMS_2700K

Luminous Intensity Polar Plot

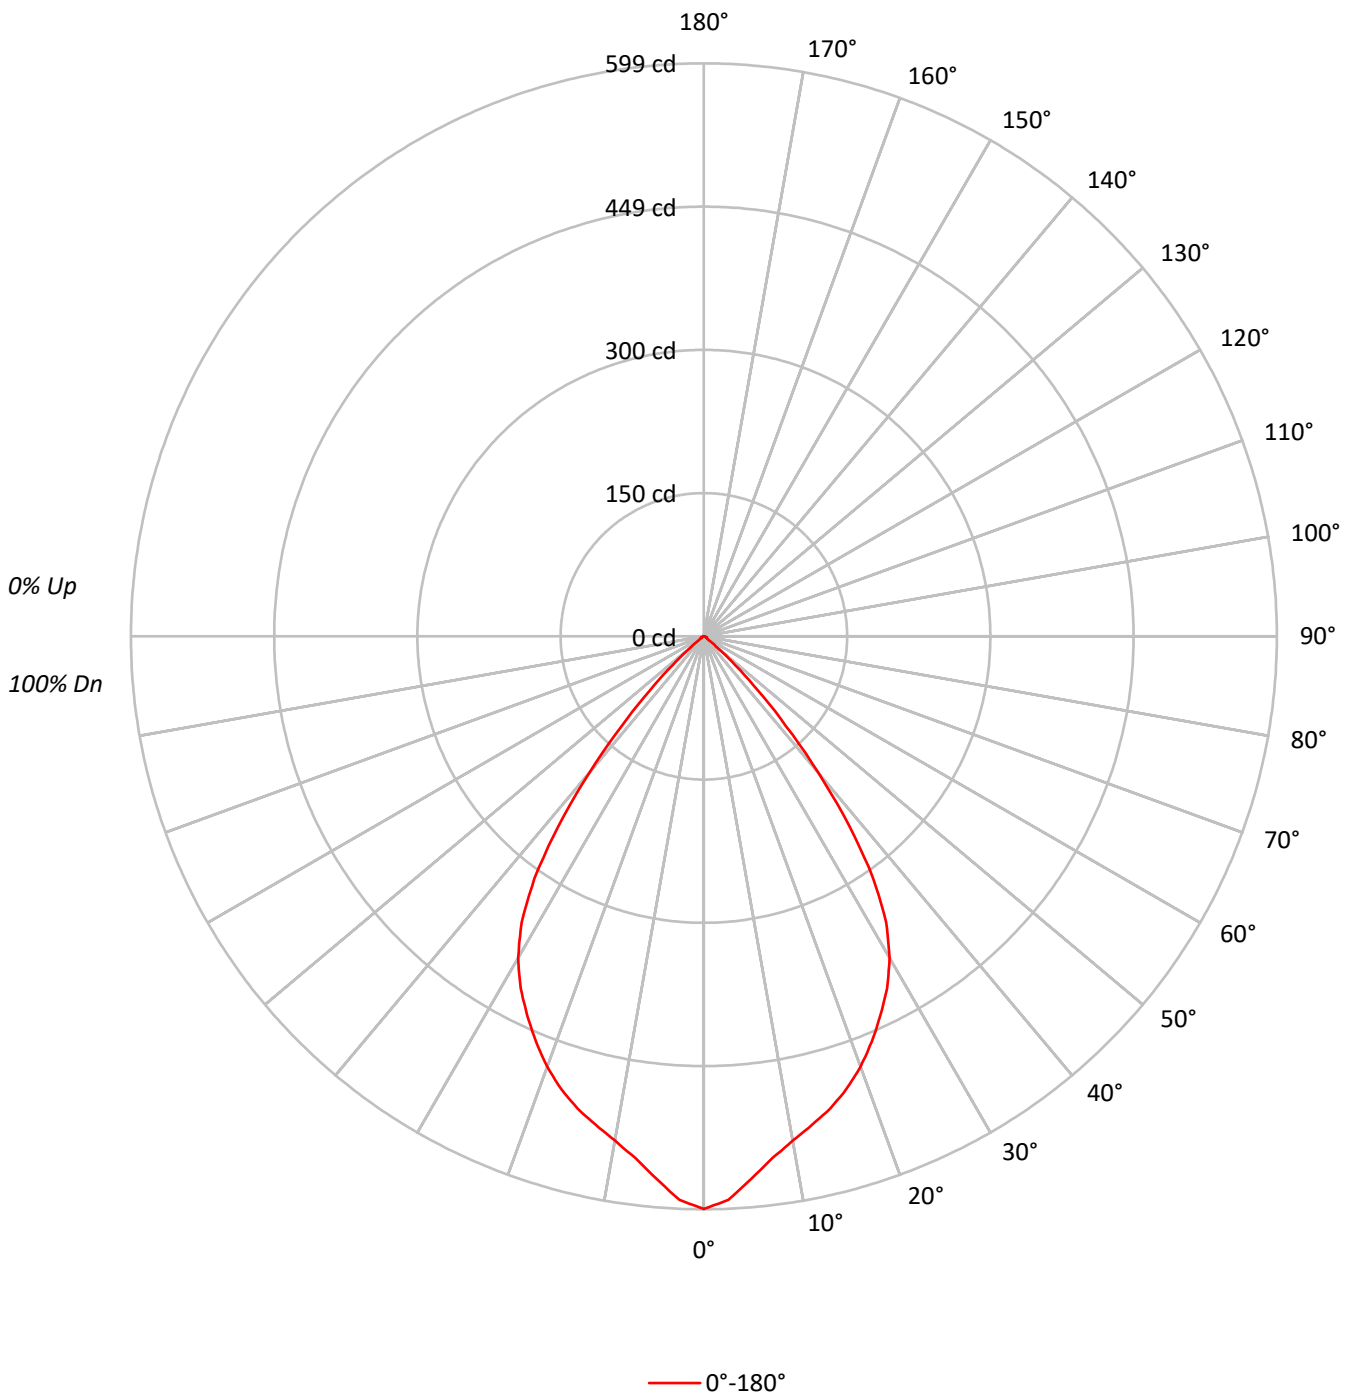



TEST NUMBER: P1295052
 CATALOG NUMBER: P3AS09R70W2N902750DE010 E3CD1MMS_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	82	80	78			78
4	95	87	81	77	94	86	81	76	84	79	75	82	78	75	80	77	74	72			72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61			61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			57
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53			53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	50	58	54	50	49			49
10	68	58	52	47	67	57	51	47	56	51	47	56	51	47	55	50	47	46			46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	131261
5°	125247
10°	119169
15°	115983
20°	111706
25°	105708
30°	98319
35°	82583
40°	53243
45°	24747
50°	6482
55°	1606
60°	1623
65°	1349
70°	1346
75°	1356
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24747 cd/sqm



TEST NUMBER: P1295052

CATALOG NUMBER: P3AS09R70W2N902750DE010 E3CD1MMS_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.3	8.1
10°-20°	143.6	21.7
20°-30°	200.6	30.3
30°-40°	186.0	28.1
40°-50°	66.7	10.1
50°-60°	5.6	0.9
60°-70°	2.8	0.4
70°-80°	1.8	0.3
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	397.4	60.1
0°-40°	583.3	88.3
0°-60°	655.7	99.2
0°-90°	661.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	661.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	599	
5°	569	53
15°	511	144
25°	437	201
35°	308	186
45°	80	67
55°	4	6
65°	3	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1295052
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3CD1MMS_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	598.6
2.5°	589.6
5°	569.0
7.5°	550.0
10°	535.2
12.5°	523.0
15°	510.9
17.5°	496.1
20°	478.7
22.5°	458.6
25°	436.9
27.5°	414.7
30°	388.3
32.5°	354.5
35°	308.5
37.5°	249.9
40°	186.0
42.5°	126.8
45°	79.8
47.5°	44.4
50°	19.0
52.5°	6.3
55°	4.2
57.5°	3.7
60°	3.7
62.5°	3.2
65°	2.6
67.5°	2.6
70°	2.1
72.5°	2.1
75°	1.6
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)