

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295090

Luminaire Tested: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295090  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 4000K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 292.0 lumens  
Efficiency: N/A  
Efficacy: 32.4 lumens/watt  
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295090  
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K

### Luminous Intensity Polar Plot

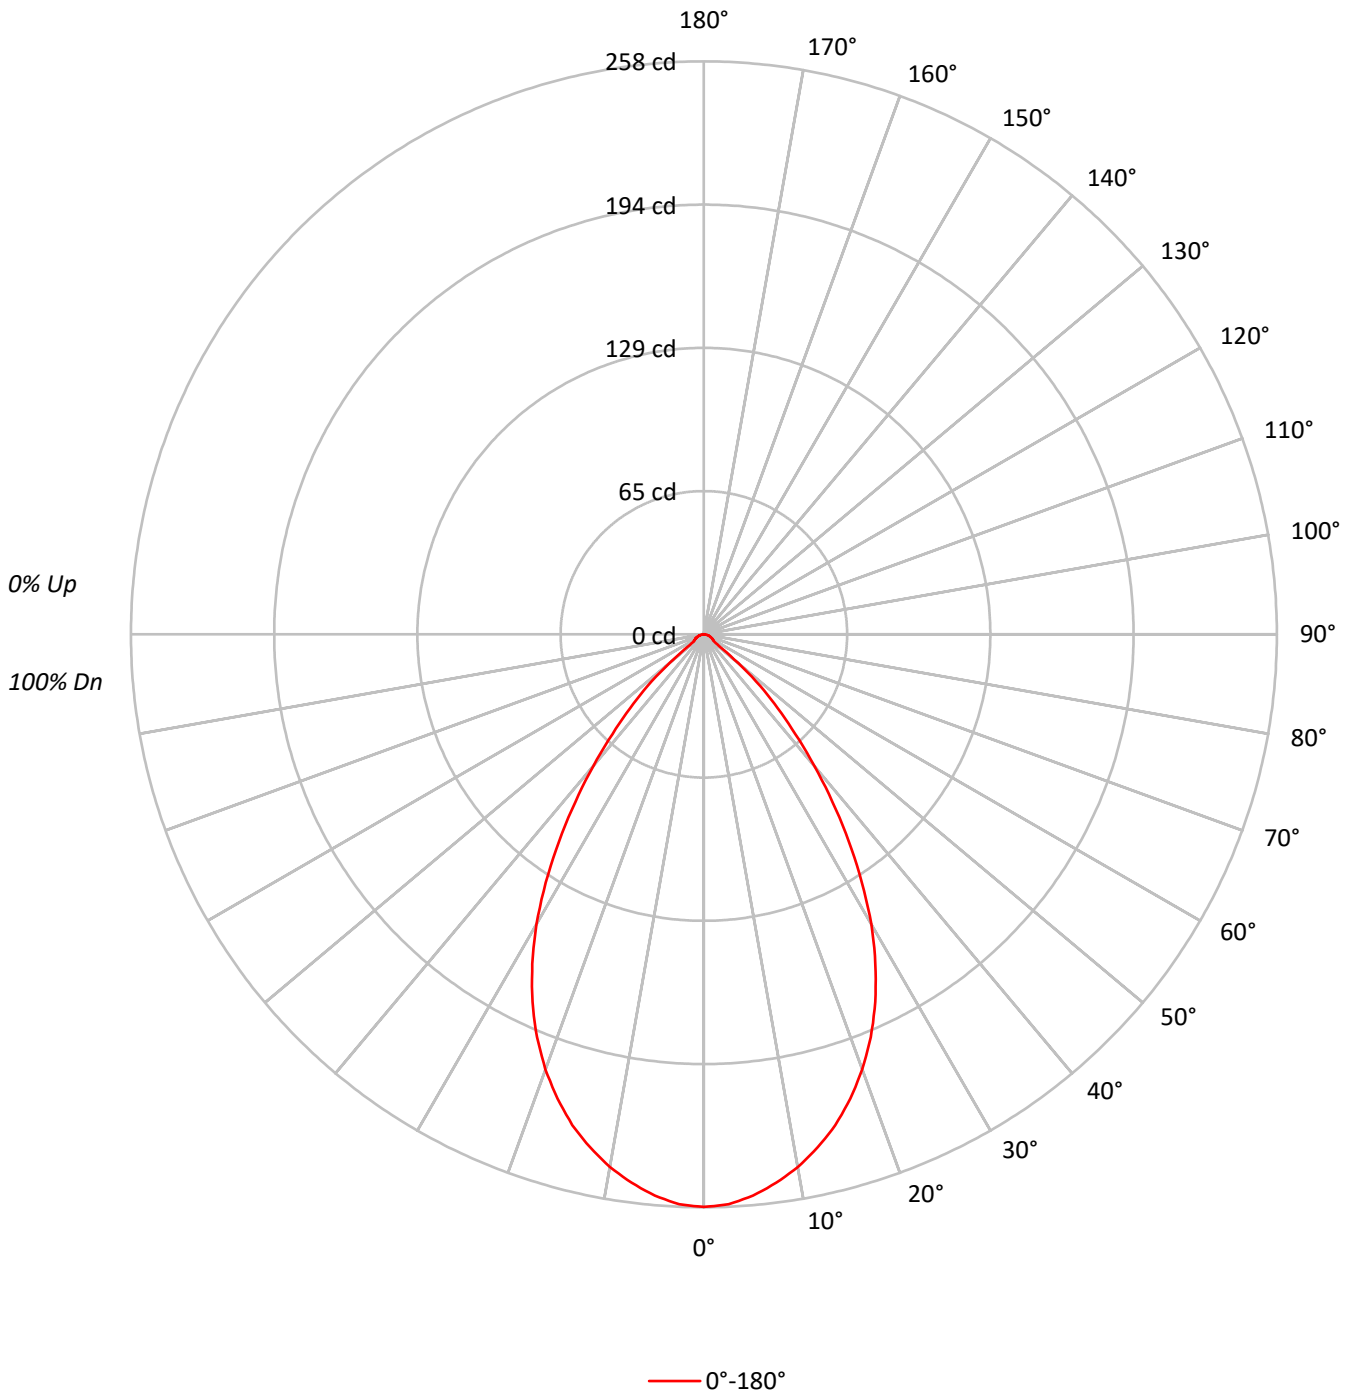



TEST NUMBER: P1295090

CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	82	89	85	81	86	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	56531
5°	55844
10°	54241
15°	51941
20°	48654
25°	44204
30°	38183
35°	30437
40°	22156
45°	14575
50°	6823
55°	2103
60°	2017
65°	1972
70°	1859
75°	1949
80°	1768
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14575 cd/sqm



TEST NUMBER: P1295090  
 CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	23.9	8.2
10°-20°	64.0	21.9
20°-30°	83.2	28.5
30°-40°	70.6	24.2
40°-50°	36.4	12.5
50°-60°	7.0	2.4
60°-70°	3.8	1.3
70°-80°	2.3	0.8
80°-90°	0.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	171.1	58.6
0°-40°	241.8	82.8
0°-60°	285.2	97.7
0°-90°	292.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	292.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	258	
5°	254	24
15°	229	64
25°	183	83
35°	114	71
45°	47	36
55°	6	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1295090  
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DL1GPH\_4000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	257.8
2.5°	256.9
5°	253.7
7.5°	249.1
10°	243.6
12.5°	236.6
15°	228.8
17.5°	219.2
20°	208.5
22.5°	196.3
25°	182.7
27.5°	167.3
30°	150.8
32.5°	132.5
35°	113.7
37.5°	95.1
40°	77.4
42.5°	60.9
45°	47.0
47.5°	34.5
50°	20.0
52.5°	8.7
55°	5.5
57.5°	5.2
60°	4.6
62.5°	4.3
65°	3.8
67.5°	3.5
70°	2.9
72.5°	2.6
75°	2.3
77.5°	1.7
80°	1.4
82.5°	0.9
85°	0.6
87.5°	0.3
90°	0.0

(END OF REPORT)