

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295133

Luminaire Tested: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295133  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3000K CCT AND, 90CRI ,  
E3DLP1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 419.0 lumens  
Efficiency: N/A  
Efficacy: 46.6 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295133  
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K

### Luminous Intensity Polar Plot

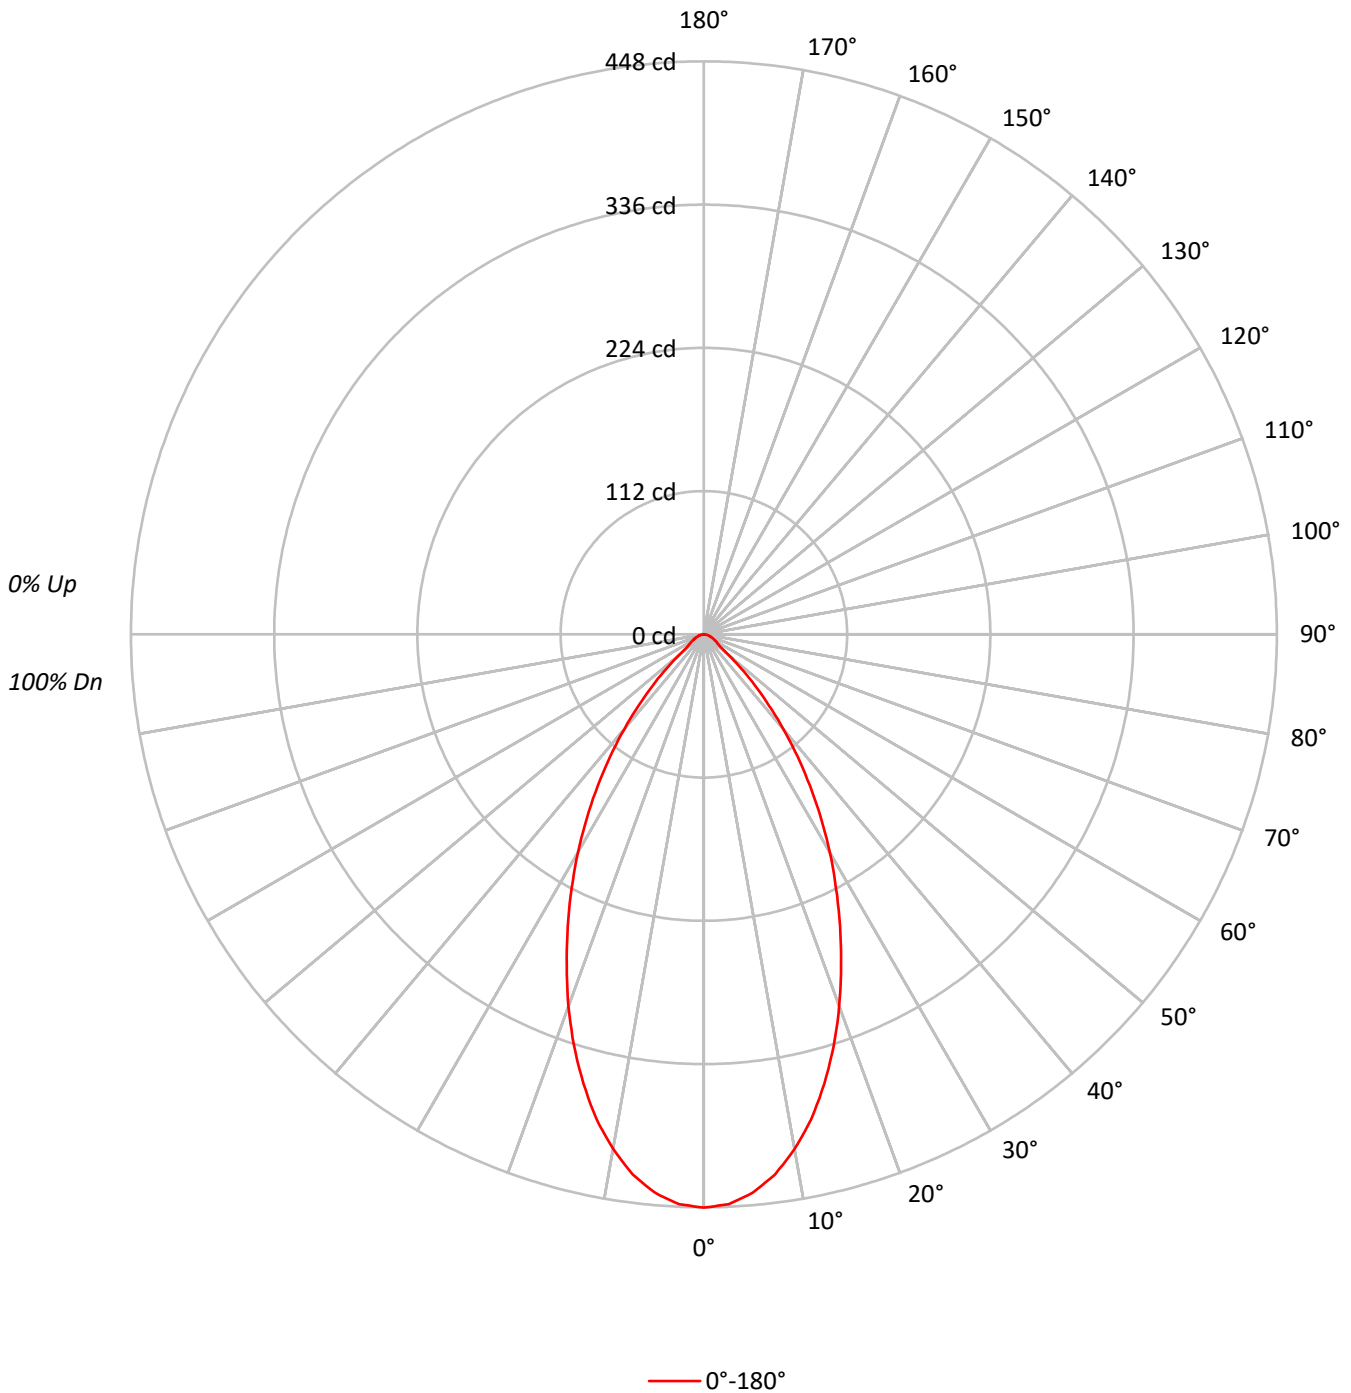



TEST NUMBER: P1295133

CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65	65	65	65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	65	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49	49	49	49
10	69	58	52	48	67	58	52	48	57	51	48	56	51	48	55	51	47	46	46	46	46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	98282
5°	96478
10°	90980
15°	82566
20°	72223
25°	60923
30°	49881
35°	38682
40°	27709
45°	17521
50°	8733
55°	5352
60°	4605
65°	4255
70°	3719
75°	3474
80°	2904
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17521 cd/sqm



TEST NUMBER: P1295133

CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	40.9	9.8
10°-20°	101.2	24.2
20°-30°	115.2	27.5
30°-40°	90.1	21.5
40°-50°	44.3	10.6
50°-60°	13.6	3.2
60°-70°	8.1	1.9
70°-80°	4.3	1.0
80°-90°	1.3	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	257.4	61.4
0°-40°	347.5	82.9
0°-60°	405.3	96.7
0°-90°	419.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	419.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	448	
5°	438	41
15°	364	101
25°	252	115
35°	144	90
45°	56	44
55°	14	14
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295133  
CATALOG NUMBER: P3AS09R70W2N902750DE010 E3DLP1MW\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	448.2
2.5°	445.9
5°	438.3
7.5°	426.0
10°	408.6
12.5°	388.2
15°	363.7
17.5°	337.5
20°	309.5
22.5°	280.3
25°	251.8
27.5°	223.8
30°	197.0
32.5°	170.2
35°	144.5
37.5°	120.1
40°	96.8
42.5°	75.2
45°	56.5
47.5°	39.6
50°	25.6
52.5°	16.9
55°	14.0
57.5°	12.2
60°	10.5
62.5°	9.3
65°	8.2
67.5°	7.0
70°	5.8
72.5°	4.7
75°	4.1
77.5°	3.5
80°	2.3
82.5°	1.7
85°	1.2
87.5°	0.6
90°	0.0

(END OF REPORT)