

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295253

Luminaire Tested: P3AS09R70W2N902765DE010 E3DL1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295253
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R70W2N902765DE010 E3DL1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 2700K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 532.0 lumens
Efficiency: N/A
Efficacy: 59.1 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295253
CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DL1WMH_2700K

Luminous Intensity Polar Plot

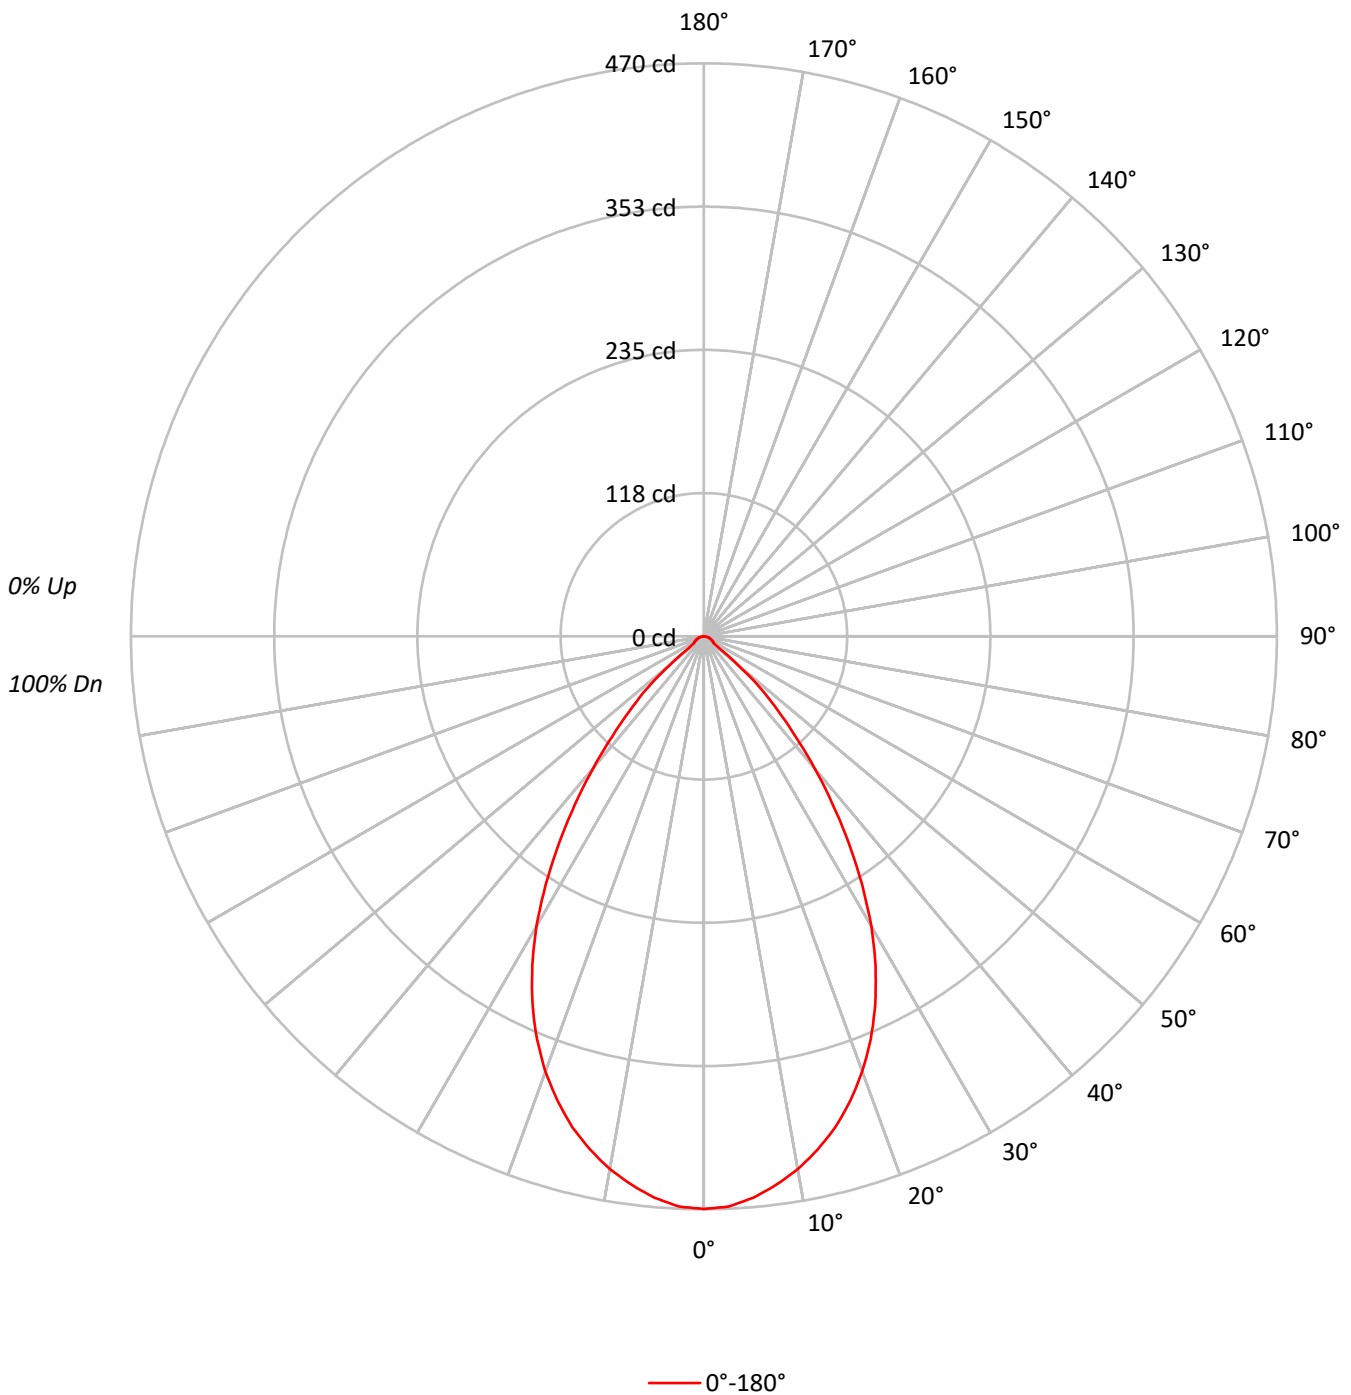



TEST NUMBER: P1295253

CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DL1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	82	89	85	81	86	83	80	84	81	79	77	77	77	77
4	94	86	80	75	93	85	79	75	83	78	74	81	76	73	79	75	72	70	70	70	70
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	53	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48	48	48	48
10	67	57	50	46	66	56	50	46	55	50	46	55	49	46	54	49	46	44	44	44	44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	102996
5°	101761
10°	98818
15°	94620
20°	88651
25°	80521
30°	69555
35°	55439
40°	40390
45°	26545
50°	12452
55°	3823
60°	3728
65°	3580
70°	3398
75°	3558
80°	3283
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26545 cd/sqm



TEST NUMBER: P1295253

CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DL1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.5	8.2
10°-20°	116.7	21.9
20°-30°	151.6	28.5
30°-40°	128.7	24.2
40°-50°	66.3	12.5
50°-60°	12.8	2.4
60°-70°	6.9	1.3
70°-80°	4.3	0.8
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	311.8	58.6
0°-40°	440.5	82.8
0°-60°	519.6	97.7
0°-90°	532.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	532.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	470	
5°	462	44
15°	417	117
25°	333	152
35°	207	129
45°	86	66
55°	10	13
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295253
CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DL1WMH_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	469.7
2.5°	468.1
5°	462.3
7.5°	453.8
10°	443.8
12.5°	431.1
15°	416.8
17.5°	399.4
20°	379.9
22.5°	357.7
25°	332.8
27.5°	304.8
30°	274.7
32.5°	241.4
35°	207.1
37.5°	173.3
40°	141.1
42.5°	110.9
45°	85.6
47.5°	62.9
50°	36.5
52.5°	15.8
55°	10.0
57.5°	9.5
60°	8.5
62.5°	7.9
65°	6.9
67.5°	6.3
70°	5.3
72.5°	4.8
75°	4.2
77.5°	3.2
80°	2.6
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)