

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295265

Luminaire Tested: P3AS09R70W2N902765DE010 E3DLP1H\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295265  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R70W2N902765DE010 E3DLP1H\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 2700K CCT AND, 90CRI ,  
E3DLP1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 380.0 lumens  
Efficiency: N/A  
Efficacy: 42.2 lumens/watt  
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295265  
CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DLP1H\_2700K

### Luminous Intensity Polar Plot

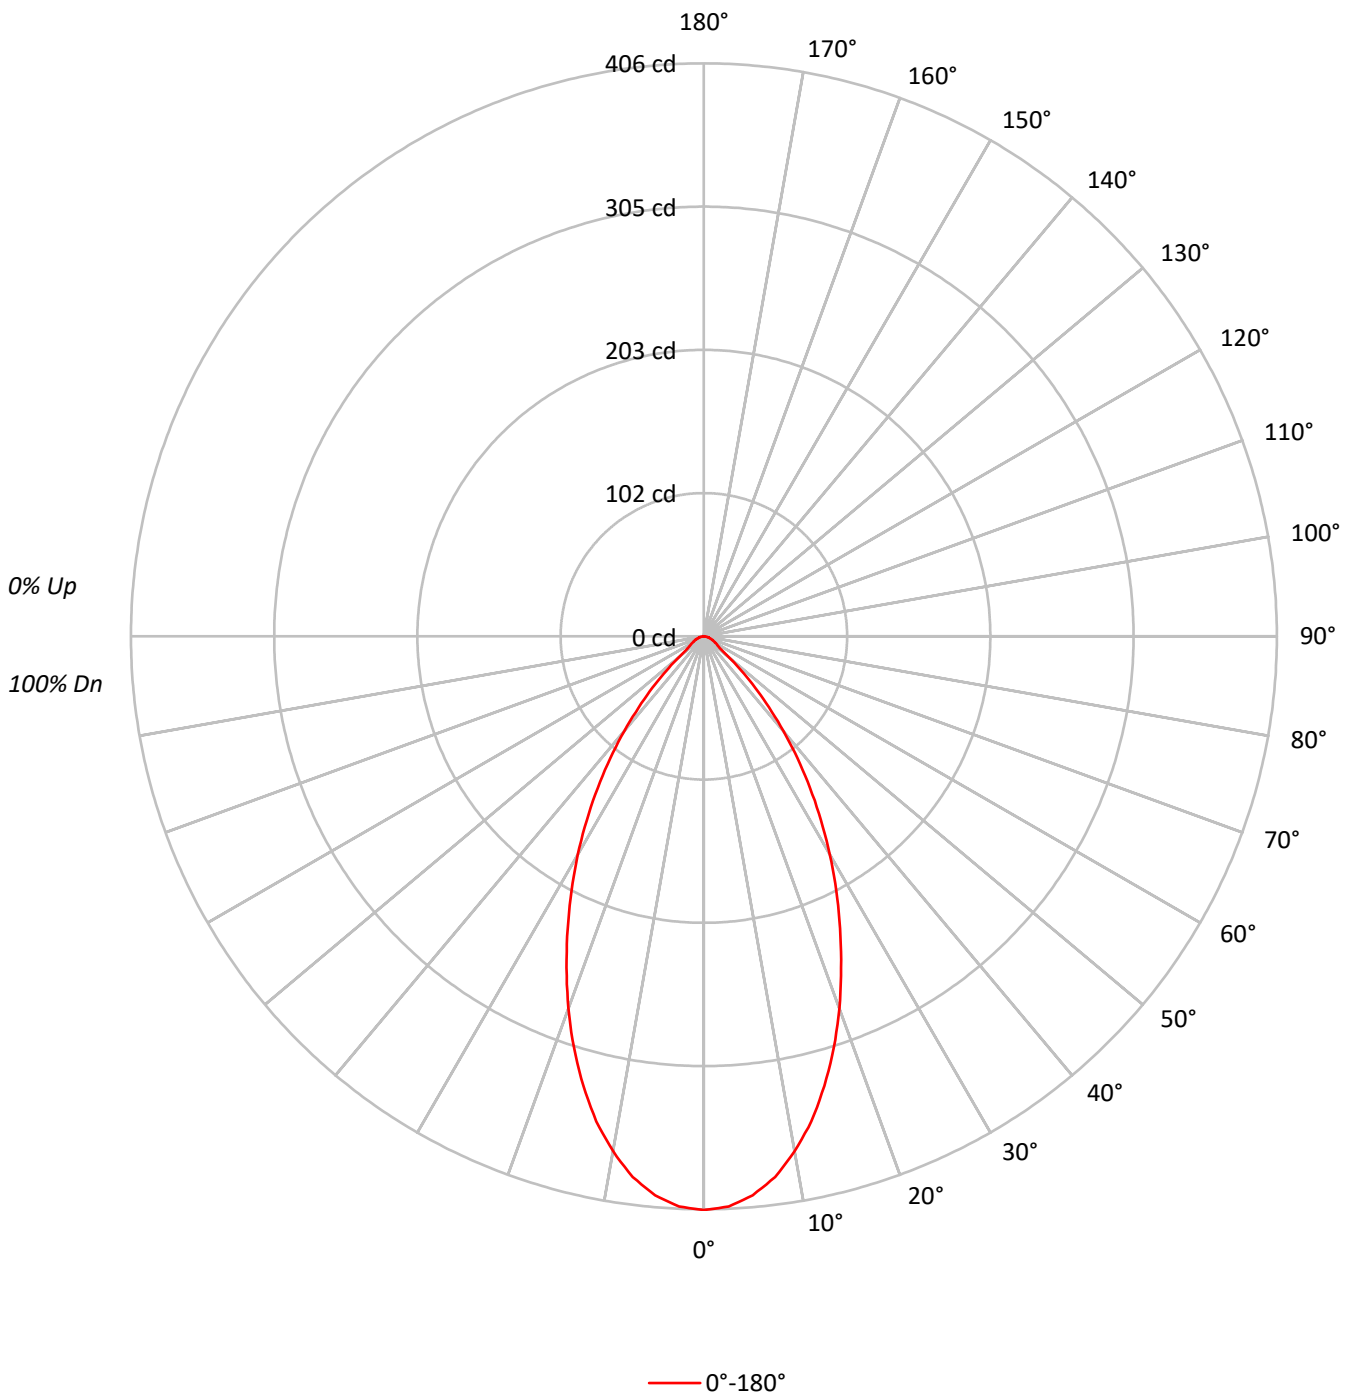



TEST NUMBER: P1295265  
 CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DLP1H\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92			92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84			84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77			77
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71			71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	65	62	61			61
7	80	70	64	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56			56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49			49
10	69	58	52	48	67	58	52	48	57	51	48	56	51	48	55	51	47	46			46

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	89138
5°	87497
10°	82497
15°	74870
20°	65502
25°	55237
30°	45247
35°	35094
40°	25104
45°	15909
50°	7949
55°	4855
60°	4166
65°	3840
70°	3398
75°	3135
80°	2652
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15909 cd/sqm



TEST NUMBER: P1295265

CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DLP1H\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	37.1	9.8
10°-20°	91.8	24.2
20°-30°	104.5	27.5
30°-40°	81.7	21.5
40°-50°	40.2	10.6
50°-60°	12.3	3.2
60°-70°	7.3	1.9
70°-80°	3.9	1.0
80°-90°	1.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	233.4	61.4
0°-40°	315.1	82.9
0°-60°	367.6	96.7
0°-90°	380.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	380.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	406	
5°	398	37
15°	330	92
25°	228	105
35°	131	82
45°	51	40
55°	13	12
65°	7	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295265  
CATALOG NUMBER: P3AS09R70W2N902765DE010 E3DLP1H\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	406.5
2.5°	404.4
5°	397.5
7.5°	386.4
10°	370.5
12.5°	352.0
15°	329.8
17.5°	306.0
20°	280.7
22.5°	254.2
25°	228.3
27.5°	203.0
30°	178.7
32.5°	154.3
35°	131.1
37.5°	108.9
40°	87.7
42.5°	68.2
45°	51.3
47.5°	35.9
50°	23.3
52.5°	15.3
55°	12.7
57.5°	11.1
60°	9.5
62.5°	8.5
65°	7.4
67.5°	6.3
70°	5.3
72.5°	4.2
75°	3.7
77.5°	3.2
80°	2.1
82.5°	1.6
85°	1.1
87.5°	0.5
90°	0.0

(END OF REPORT)