

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295323

Luminaire Tested: P3AS13R15W2N902750DE010 E3CD1MB\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295323  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R15W2N902750DE010 E3CD1MB\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3000K CCT AND, 90CRI ,  
E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 967.0 lumens  
Efficiency: N/A  
Efficacy: 78.6 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295323  
CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MB\_3000K

### Luminous Intensity Polar Plot

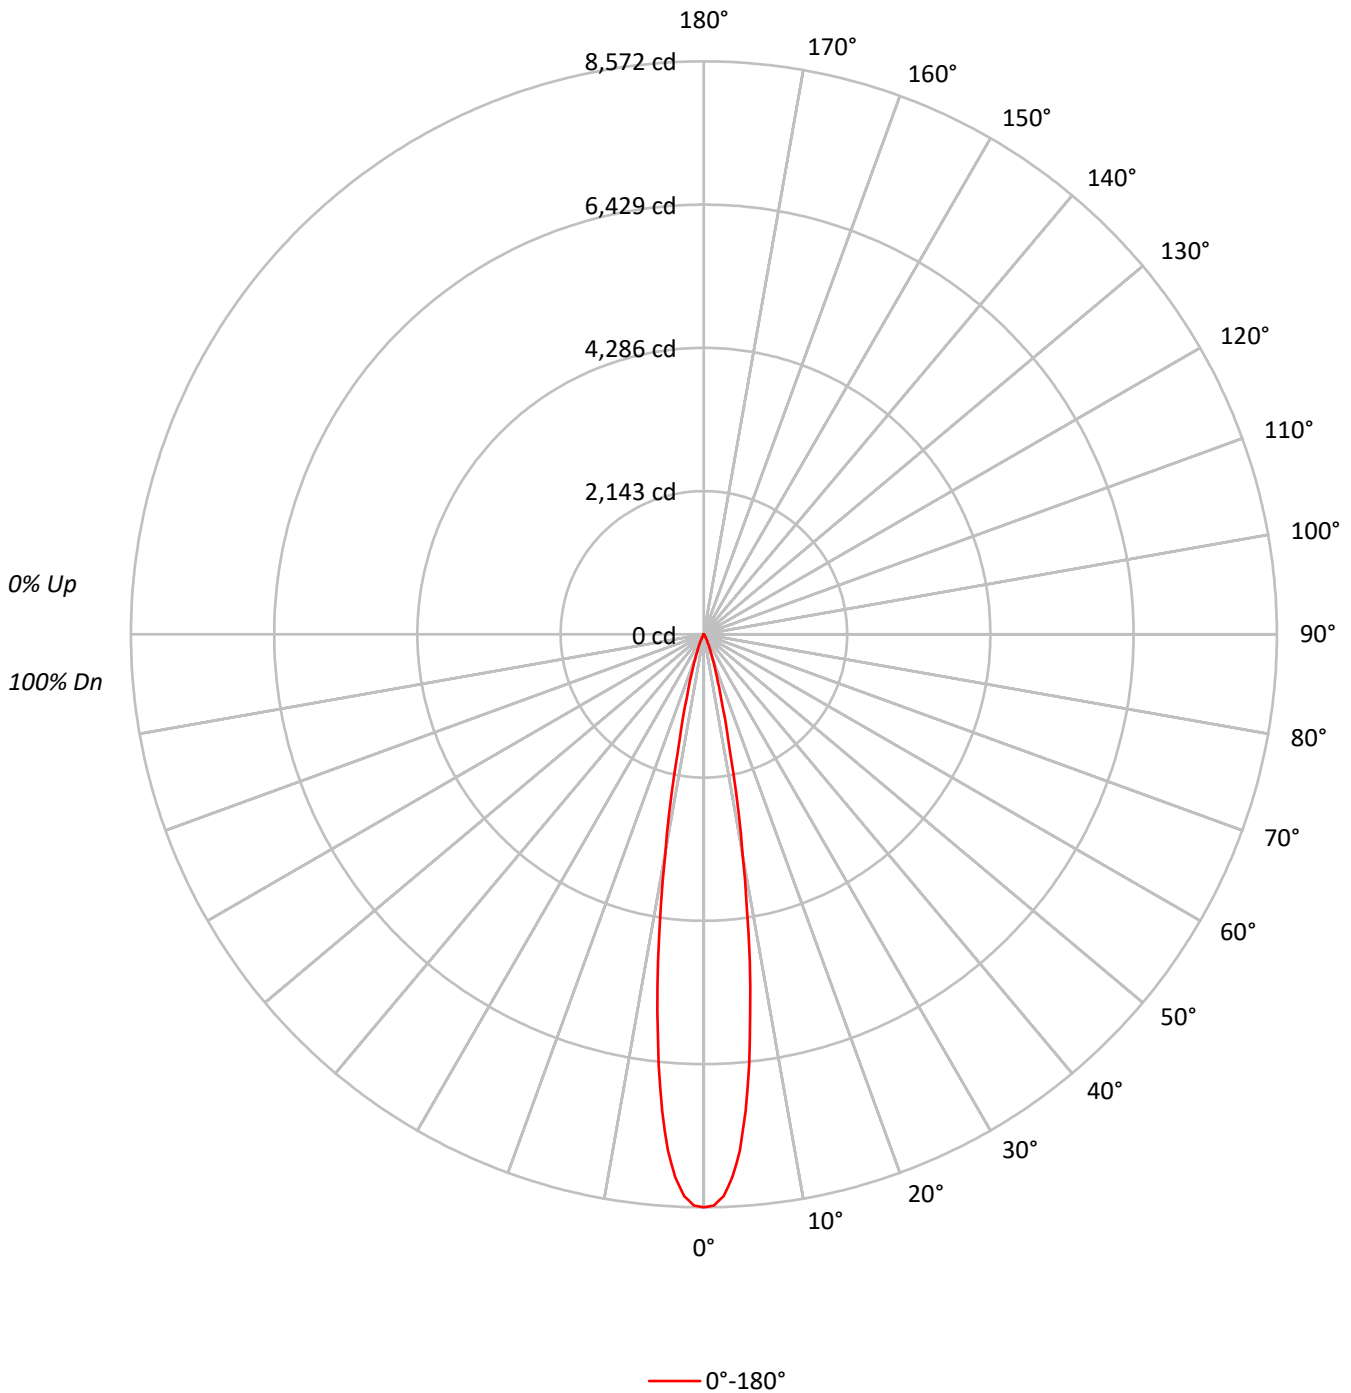



TEST NUMBER: P1295323

CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MB\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	86
9	97	92	89	87	97	92	89	86	91	88	86	90	88	86	90	87	86	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1879608
5°	1575299
10°	742026
15°	223724
20°	82771
25°	32179
30°	12002
35°	3694
40°	1317
45°	713
50°	512
55°	573
60°	658
65°	415
70°	513
75°	678
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 713 cd/sqm



TEST NUMBER: P1295323

CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MB\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	553.3	57.2
10°-20°	328.9	34.0
20°-30°	69.1	7.1
30°-40°	11.1	1.2
40°-50°	1.9	0.2
50°-60°	1.3	0.1
60°-70°	0.9	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	951.2	98.4
0°-40°	962.4	99.5
0°-60°	965.6	99.9
0°-90°	967.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	967.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8572	
5°	7157	553
15°	986	329
25°	133	69
35°	14	11
45°	2	2
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1295323  
CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MB\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8571.7
1°	8545.0
2°	8408.9
3°	8136.7
4°	7737.7
5°	7156.6
6°	6473.9
7°	5693.3
8°	4947.9
9°	4103.9
10°	3332.5
12.5°	1798.1
15°	985.5
17.5°	577.2
20°	354.7
22.5°	217.1
25°	133.0
27.5°	80.3
30°	47.4
32.5°	26.8
35°	13.8
37.5°	7.6
40°	4.6
42.5°	3.1
45°	2.3
47.5°	1.5
50°	1.5
52.5°	1.5
55°	1.5
57.5°	1.5
60°	1.5
62.5°	0.8
65°	0.8
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)