

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295329

Luminaire Tested: P3AS13R15W2N902750DE010 E3CD1MMS_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295329
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R15W2N902750DE010 E3CD1MMS_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3500K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 981.1 lumens
Efficiency: N/A
Efficacy: 79.8 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295329
CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MMS_3500K

Luminous Intensity Polar Plot

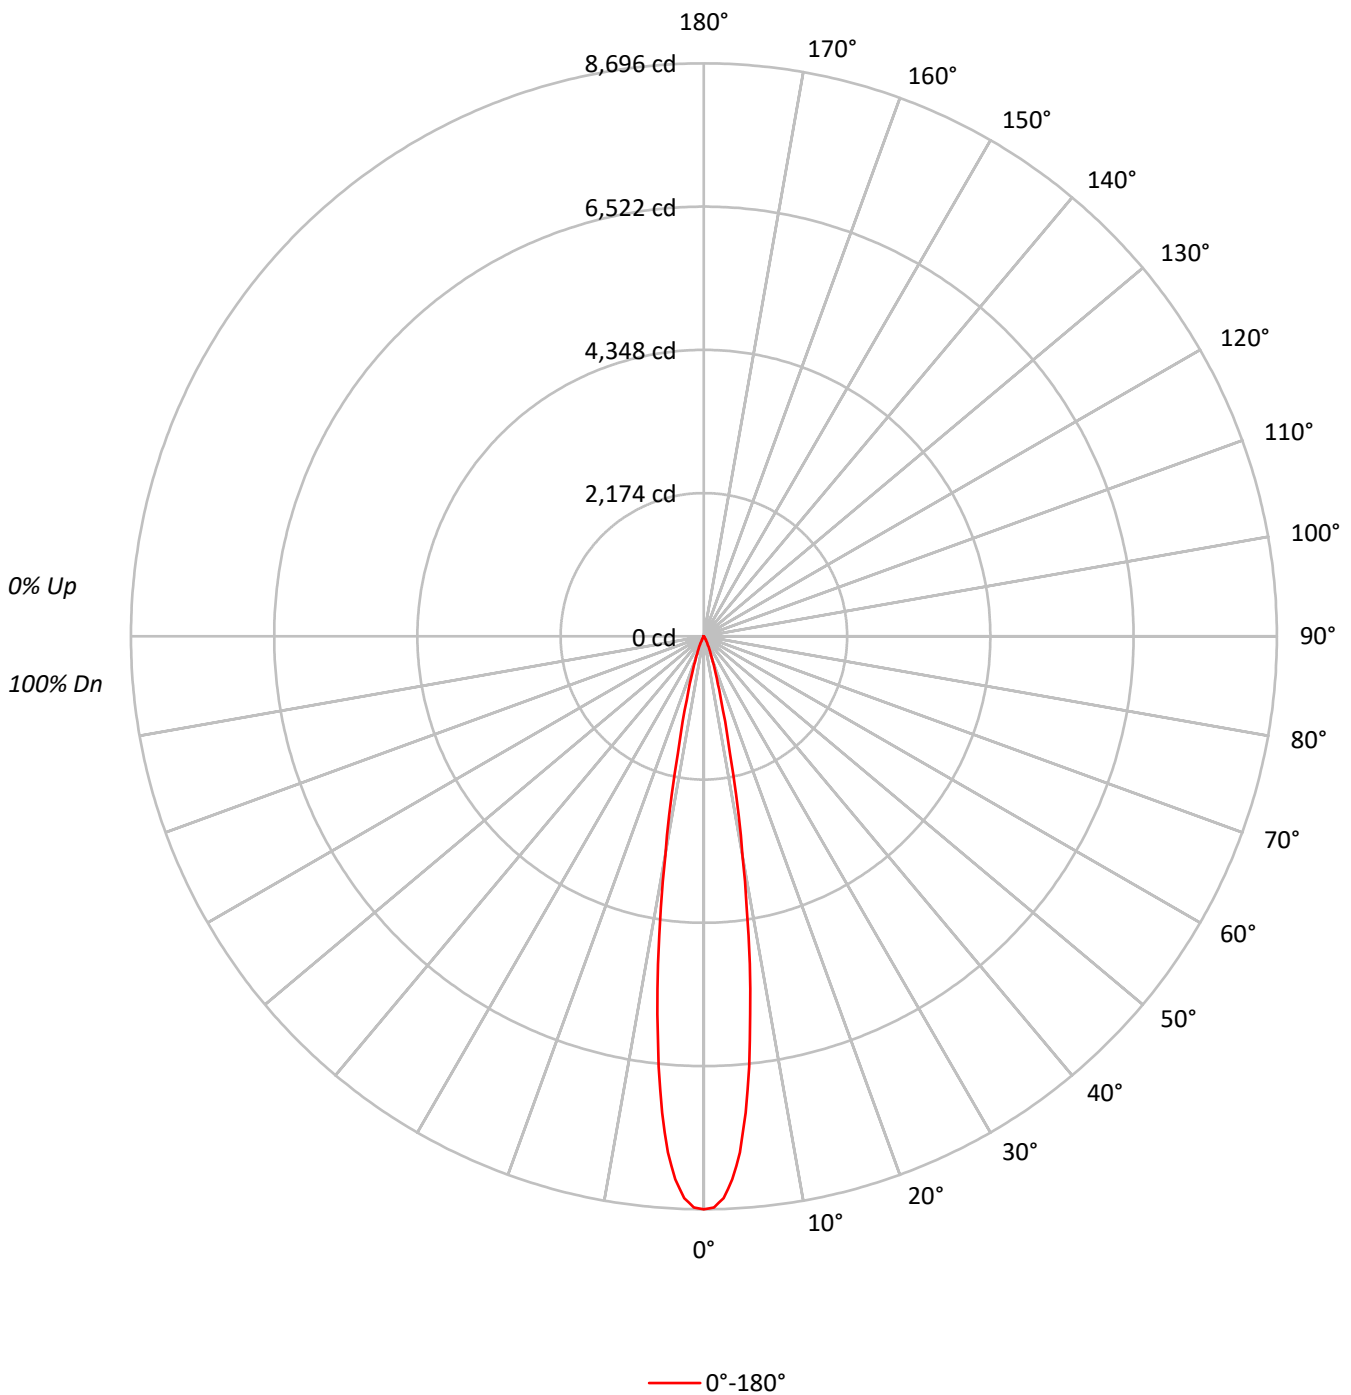



TEST NUMBER: P1295329
 CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MMS_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	100	100	100	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	97	98	97	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	98	97	95	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	97	95	93	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	95	93	92	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	94	92	90	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	92	90	89	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	91	89	87	86
9	97	92	89	87	97	92	89	86	91	88	86	90	88	86	90	87	86	90	87	86	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	88	86	85	84

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1906821
5°	1598103
10°	752781
15°	226948
20°	83984
25°	32663
30°	12179
35°	3748
40°	1345
45°	713
50°	546
55°	612
60°	702
65°	415
70°	513
75°	678
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 713 cd/sqm



TEST NUMBER: P1295329

CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MMS_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	561.3	57.2
10°-20°	333.6	34.0
20°-30°	70.1	7.1
30°-40°	11.3	1.2
40°-50°	1.9	0.2
50°-60°	1.4	0.1
60°-70°	0.9	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	965.0	98.4
0°-40°	976.3	99.5
0°-60°	979.7	99.9
0°-90°	981.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	981.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8696	
5°	7260	561
15°	1000	334
25°	135	70
35°	14	11
45°	2	2
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1295329
CATALOG NUMBER: P3AS13R15W2N902750DE010 E3CD1MMS_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	8695.8
1°	8668.7
2°	8530.6
3°	8254.5
4°	7849.7
5°	7260.2
6°	6567.6
7°	5775.8
8°	5019.6
9°	4163.3
10°	3380.8
12.5°	1824.2
15°	999.7
17.5°	585.6
20°	359.9
22.5°	220.3
25°	135.0
27.5°	81.4
30°	48.1
32.5°	27.1
35°	14.0
37.5°	7.8
40°	4.7
42.5°	3.1
45°	2.3
47.5°	1.6
50°	1.6
52.5°	1.6
55°	1.6
57.5°	1.6
60°	1.6
62.5°	0.8
65°	0.8
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)