

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295573

Luminaire Tested: P3AS13R15W2N902765DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295573  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R15W2N902765DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 298.0 lumens  
Efficiency: N/A  
Efficacy: 24.2 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295573  
CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

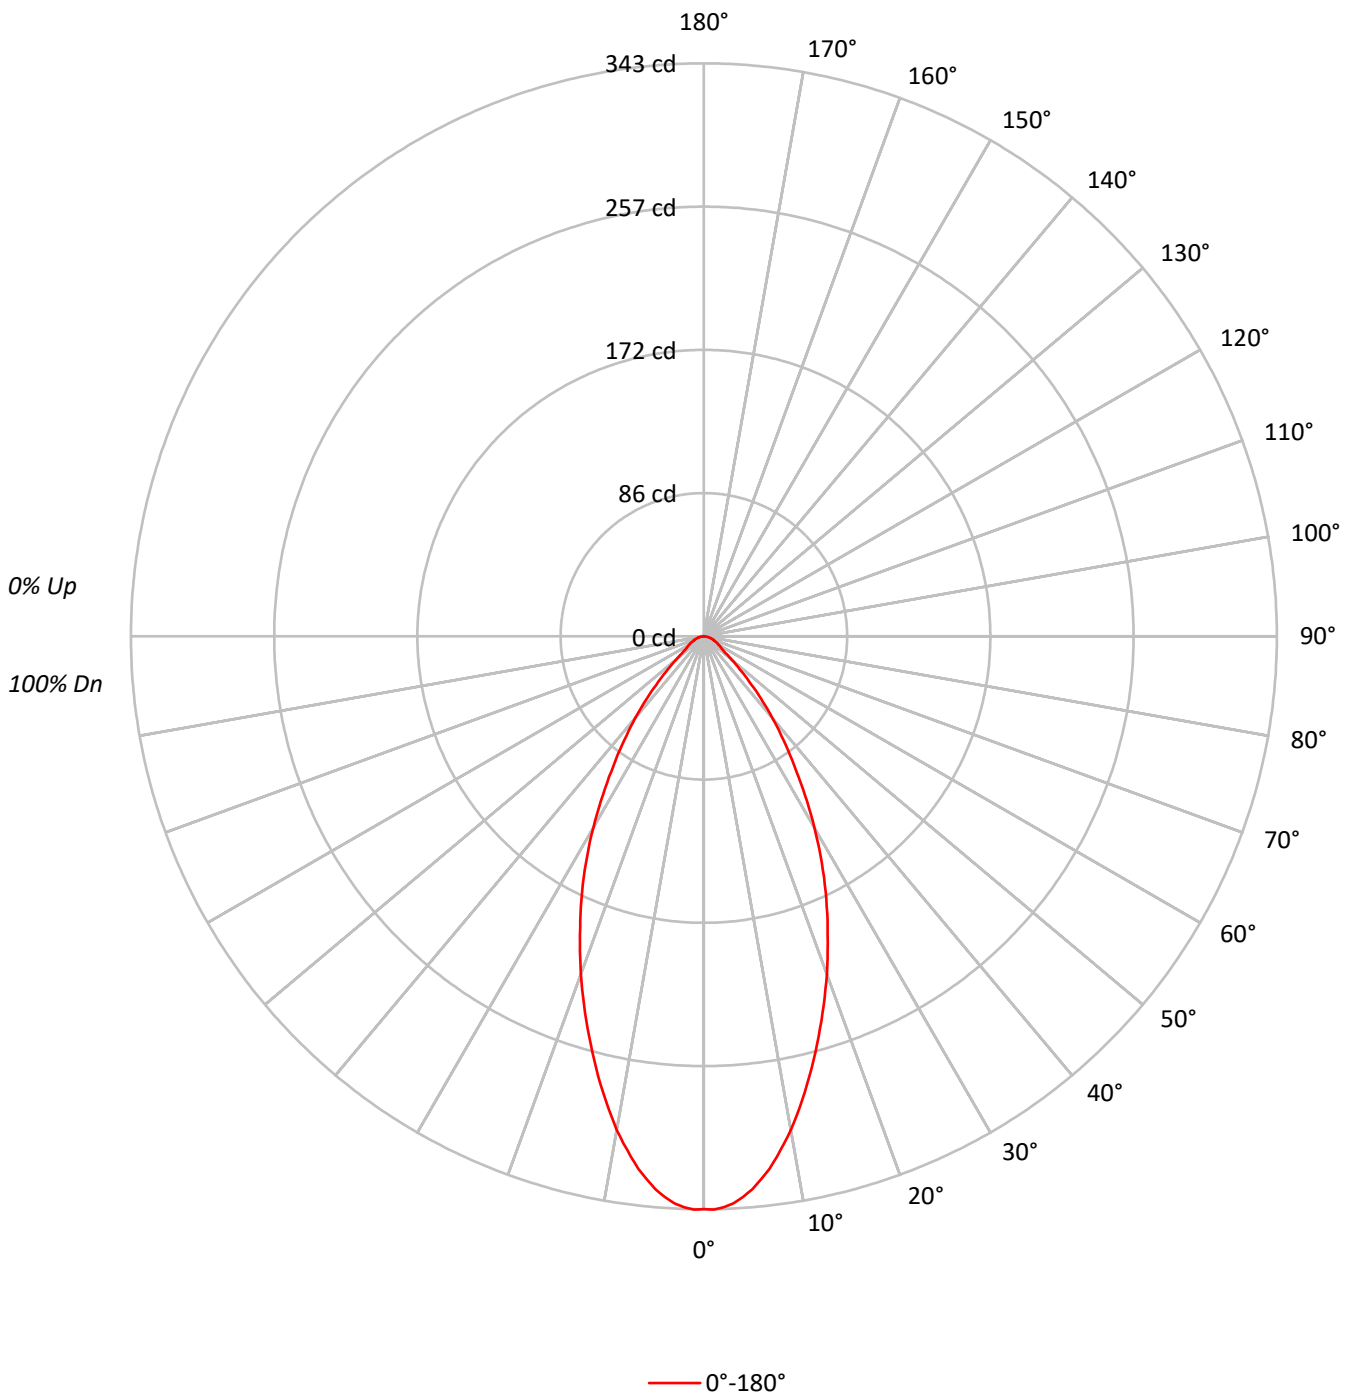





TEST NUMBER: P1295573

CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.7	10.3
10°-20°	71.8	24.1
20°-30°	79.2	26.6
30°-40°	59.3	19.9
40°-50°	30.7	10.3
50°-60°	12.7	4.3
60°-70°	7.9	2.6
70°-80°	4.4	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	181.7	61.0
0°-40°	240.9	80.9
0°-60°	284.4	95.4
0°-90°	298.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	298.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	343	
5°	332	31
15°	258	72
25°	173	79
35°	94	59
45°	38	31
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295573  
CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	342.8
1°	343.2
2°	342.0
3°	339.8
4°	336.4
5°	332.2
6°	326.9
7°	321.3
8°	314.5
9°	307.3
10°	300.1
12.5°	279.4
15°	257.8
17.5°	236.3
20°	215.2
22.5°	193.7
25°	173.3
27.5°	152.9
30°	132.5
32.5°	112.5
35°	94.0
37.5°	78.1
40°	63.8
42.5°	50.6
45°	38.5
47.5°	29.1
50°	21.9
52.5°	16.2
55°	13.2
57.5°	11.7
60°	10.2
62.5°	9.1
65°	7.9
67.5°	6.8
70°	6.0
72.5°	4.9
75°	4.2
77.5°	3.4
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4
90°	0.0

(END OF REPORT)