

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295584

Luminaire Tested: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295584  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,  
E3DLD1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 612.0 lumens  
Efficiency: N/A  
Efficacy: 49.8 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295584  
CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K

### Luminous Intensity Polar Plot

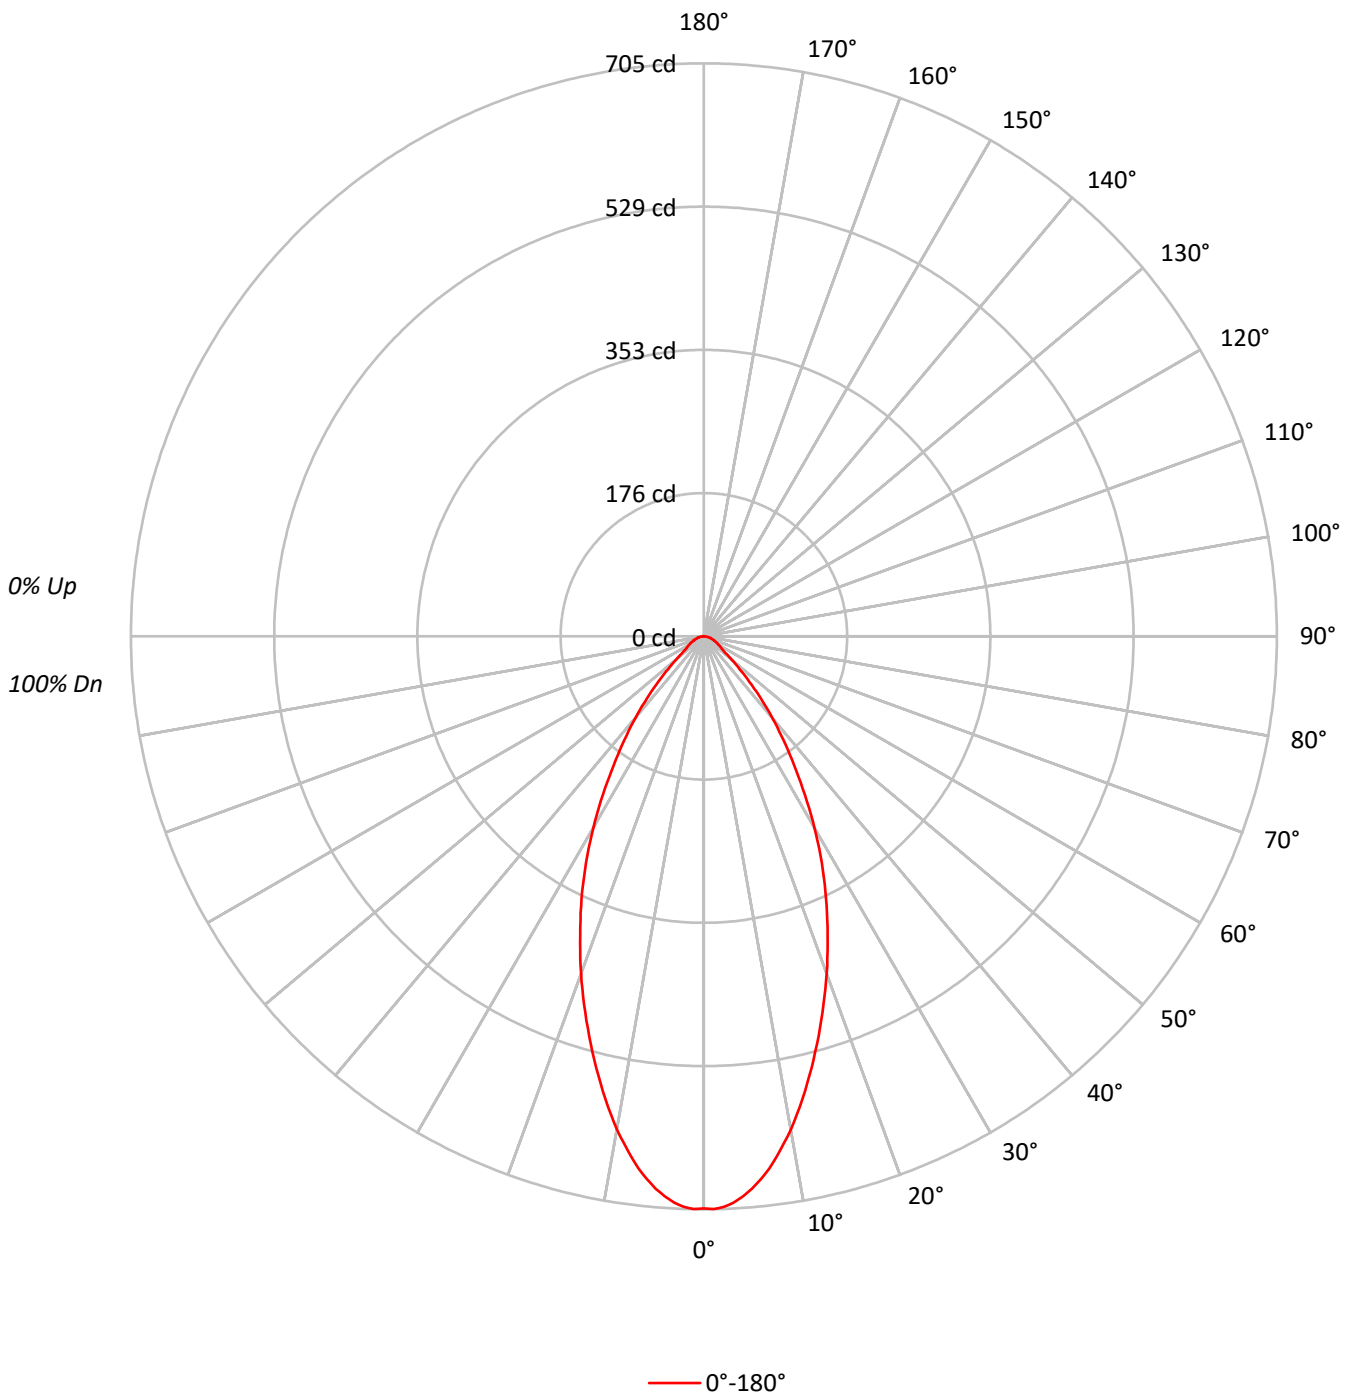



TEST NUMBER: P1295584

CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	73	68	87	79	73	68	77	72	67	75	71	67	74	69	66	65			
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60			
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56			
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52			
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49			
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	154374
5°	150187
10°	137250
15°	120205
20°	103119
25°	86110
30°	68897
35°	51691
40°	37499
45°	24530
50°	15351
55°	10360
60°	9166
65°	8457
70°	7950
75°	7202
80°	6819
85°	5787

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24530 cd/sqm



TEST NUMBER: P1295584

CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	63.0	10.3
10°-20°	147.5	24.1
20°-30°	162.6	26.6
30°-40°	121.7	19.9
40°-50°	63.1	10.3
50°-60°	26.1	4.3
60°-70°	16.2	2.6
70°-80°	9.1	1.5
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	373.1	61.0
0°-40°	494.8	80.9
0°-60°	584.0	95.4
0°-90°	612.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	612.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	704	
5°	682	63
15°	530	148
25°	356	163
35°	193	122
45°	79	63
55°	27	26
65°	16	16
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P1295584  
CATALOG NUMBER: P3AS13R15W2N902765DE010 E3DLD1LI\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	704.0
1°	704.8
2°	702.4
3°	697.8
4°	690.8
5°	682.3
6°	671.4
7°	659.8
8°	645.8
9°	631.1
10°	616.4
12.5°	573.7
15°	529.5
17.5°	485.3
20°	441.9
22.5°	397.7
25°	355.9
27.5°	314.0
30°	272.1
32.5°	231.0
35°	193.1
37.5°	160.5
40°	131.0
42.5°	103.9
45°	79.1
47.5°	59.7
50°	45.0
52.5°	33.3
55°	27.1
57.5°	24.0
60°	20.9
62.5°	18.6
65°	16.3
67.5°	14.0
70°	12.4
72.5°	10.1
75°	8.5
77.5°	7.0
80°	5.4
82.5°	3.9
85°	2.3
87.5°	0.8
90°	0.0

(END OF REPORT)