

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295664

Luminaire Tested: P3AS13R20W2N902750DE010 E3CB1MMS_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295664
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R20W2N902750DE010 E3CB1MMS_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 875.0 lumens
Efficiency: N/A
Efficacy: 71.1 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295664
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3CB1MMS_2700K

Luminous Intensity Polar Plot

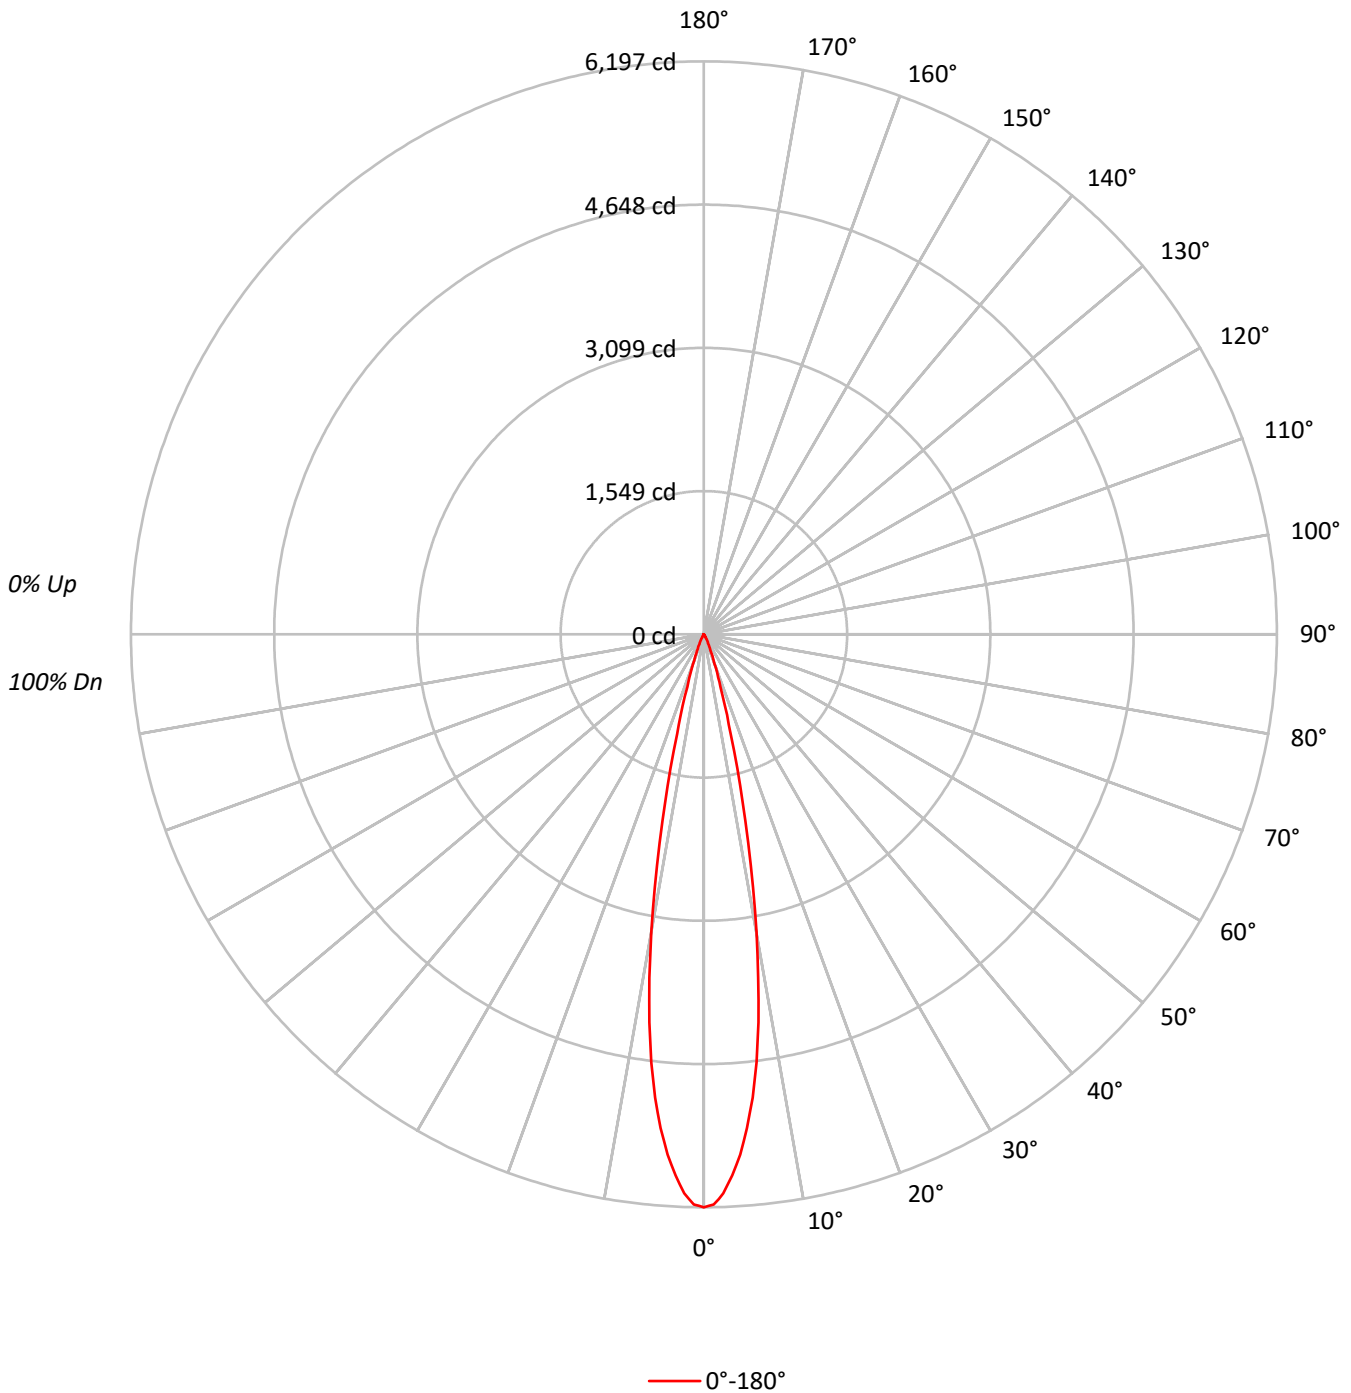



TEST NUMBER: P1295664

CATALOG NUMBER: P3AS13R20W2N902750DE010 E3CB1MMS_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 116 | 114 | 112 | 110 | 113 | 112 | 110 | 109 | 108 | 106 | 105 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 98 | 98 | 98 |
| 2 | 112 | 109 | 107 | 104 | 110 | 108 | 105 | 103 | 104 | 103 | 101 | 102 | 100 | 99 | 99 | 98 | 97 | 97 | 98 | 97 | 95 |
| 3 | 109 | 105 | 102 | 100 | 108 | 104 | 101 | 99 | 102 | 99 | 97 | 99 | 98 | 96 | 97 | 96 | 95 | 95 | 96 | 95 | 93 |
| 4 | 107 | 102 | 99 | 96 | 105 | 101 | 98 | 96 | 99 | 97 | 95 | 97 | 95 | 93 | 96 | 94 | 92 | 96 | 94 | 92 | 91 |
| 5 | 104 | 99 | 96 | 93 | 103 | 98 | 95 | 93 | 97 | 94 | 92 | 95 | 93 | 91 | 94 | 92 | 91 | 94 | 92 | 91 | 90 |
| 6 | 102 | 97 | 93 | 91 | 101 | 96 | 93 | 90 | 95 | 92 | 90 | 94 | 91 | 89 | 93 | 90 | 89 | 93 | 90 | 89 | 88 |
| 7 | 100 | 94 | 91 | 88 | 99 | 94 | 91 | 88 | 93 | 90 | 88 | 92 | 89 | 87 | 91 | 89 | 87 | 91 | 89 | 87 | 86 |
| 8 | 98 | 92 | 89 | 86 | 97 | 92 | 89 | 86 | 91 | 88 | 86 | 90 | 88 | 86 | 89 | 87 | 85 | 89 | 87 | 85 | 85 |
| 9 | 96 | 90 | 87 | 85 | 95 | 90 | 87 | 85 | 89 | 86 | 84 | 89 | 86 | 84 | 88 | 86 | 84 | 88 | 86 | 84 | 83 |
| 10 | 94 | 89 | 85 | 83 | 93 | 88 | 85 | 83 | 88 | 85 | 83 | 87 | 84 | 83 | 86 | 84 | 82 | 86 | 84 | 82 | 82 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1358970 |
| 5° | 1179548 |
| 10° | 728822 |
| 15° | 253146 |
| 20° | 77730 |
| 25° | 27485 |
| 30° | 10179 |
| 35° | 4069 |
| 40° | 2176 |
| 45° | 868 |
| 50° | 478 |
| 55° | 535 |
| 60° | 614 |
| 65° | 363 |
| 70° | 449 |
| 75° | 593 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 868 cd/sqm



TEST NUMBER: P1295664

CATALOG NUMBER: P3AS13R20W2N902750DE010 E3CB1MMS_2700K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 444.7 | 50.8 |
| 10°-20° | 352.9 | 40.3 |
| 20°-30° | 61.1 | 7.0 |
| 30°-40° | 11.1 | 1.3 |
| 40°-50° | 2.5 | 0.3 |
| 50°-60° | 1.3 | 0.1 |
| 60°-70° | 0.8 | 0.1 |
| 70°-80° | 0.6 | 0.1 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 858.7 | 98.1 |
| 0°-40° | 869.8 | 99.4 |
| 0°-60° | 873.6 | 99.8 |
| 0°-90° | 875.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 875.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6197 | |
| 5° | 5359 | 445 |
| 15° | 1115 | 353 |
| 25° | 114 | 61 |
| 35° | 15 | 11 |
| 45° | 3 | 3 |
| 55° | 1 | 1 |
| 65° | 1 | 1 |
| 75° | 1 | 1 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P1295664
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3CB1MMS_2700K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 6197.4 |
| 1° | 6167.6 |
| 2° | 6049.9 |
| 3° | 5860.8 |
| 4° | 5639.2 |
| 5° | 5358.7 |
| 6° | 5037.3 |
| 7° | 4663.3 |
| 8° | 4237.4 |
| 9° | 3758.8 |
| 10° | 3273.2 |
| 12.5° | 2064.7 |
| 15° | 1115.1 |
| 17.5° | 595.6 |
| 20° | 333.1 |
| 22.5° | 190.5 |
| 25° | 113.6 |
| 27.5° | 69.3 |
| 30° | 40.2 |
| 32.5° | 23.5 |
| 35° | 15.2 |
| 37.5° | 10.4 |
| 40° | 7.6 |
| 42.5° | 4.8 |
| 45° | 2.8 |
| 47.5° | 1.4 |
| 50° | 1.4 |
| 52.5° | 1.4 |
| 55° | 1.4 |
| 57.5° | 1.4 |
| 60° | 1.4 |
| 62.5° | 0.7 |
| 65° | 0.7 |
| 67.5° | 0.7 |
| 70° | 0.7 |
| 72.5° | 0.7 |
| 75° | 0.7 |
| 77.5° | 0.7 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)