

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295728

Luminaire Tested: P3AS13R20W2N902750DE010 E3DL1LI\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295728  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R20W2N902750DE010 E3DL1LI\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 5000K CCT AND, 90CRI ,  
E3DL1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 798.0 lumens  
Efficiency: N/A  
Efficacy: 64.9 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295728  
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DL1LI\_5000K

### Luminous Intensity Polar Plot

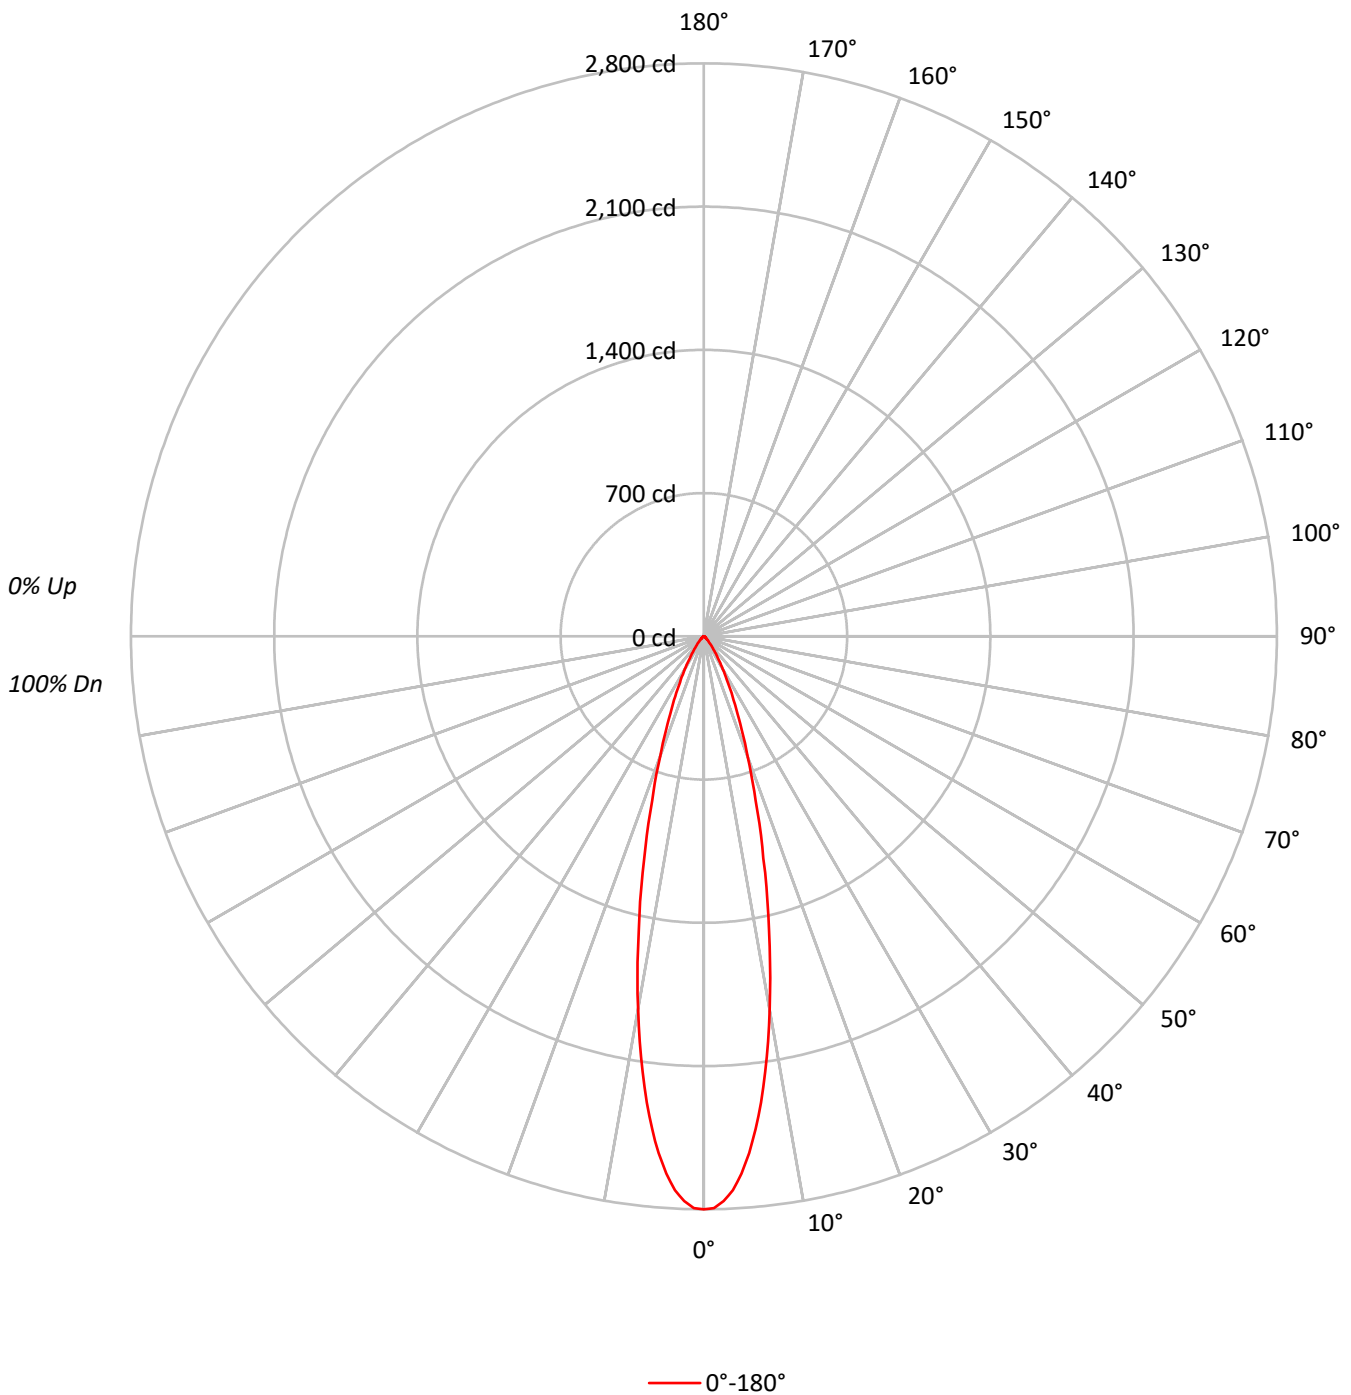





TEST NUMBER: P1295728

CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DL1LI\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	219.6	27.5
10°-20°	313.4	39.3
20°-30°	163.6	20.5
30°-40°	63.3	7.9
40°-50°	20.5	2.6
50°-60°	8.1	1.0
60°-70°	5.3	0.7
70°-80°	3.2	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	696.6	87.3
0°-40°	759.8	95.2
0°-60°	788.4	98.8
0°-90°	798.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	798.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2800	
5°	2536	220
15°	1124	313
25°	344	164
35°	95	63
45°	25	21
55°	8	8
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1295728  
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DL1LI\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2799.9
1°	2794.5
2°	2761.4
3°	2710.5
4°	2631.9
5°	2535.5
6°	2421.4
7°	2295.0
8°	2148.5
9°	2005.9
10°	1852.5
12.5°	1472.4
15°	1124.0
17.5°	841.1
20°	624.4
22.5°	462.5
25°	343.8
27.5°	253.6
30°	184.2
32.5°	133.4
35°	94.8
37.5°	68.6
40°	48.6
42.5°	34.7
45°	24.7
47.5°	17.7
50°	13.1
52.5°	10.0
55°	8.5
57.5°	7.7
60°	6.9
62.5°	6.2
65°	5.4
67.5°	4.6
70°	3.9
72.5°	3.9
75°	3.1
77.5°	2.3
80°	1.5
82.5°	1.5
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)