

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295740

Luminaire Tested: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295740  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 295.0 lumens  
Efficiency: N/A  
Efficacy: 24.0 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295740  
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K

### Luminous Intensity Polar Plot

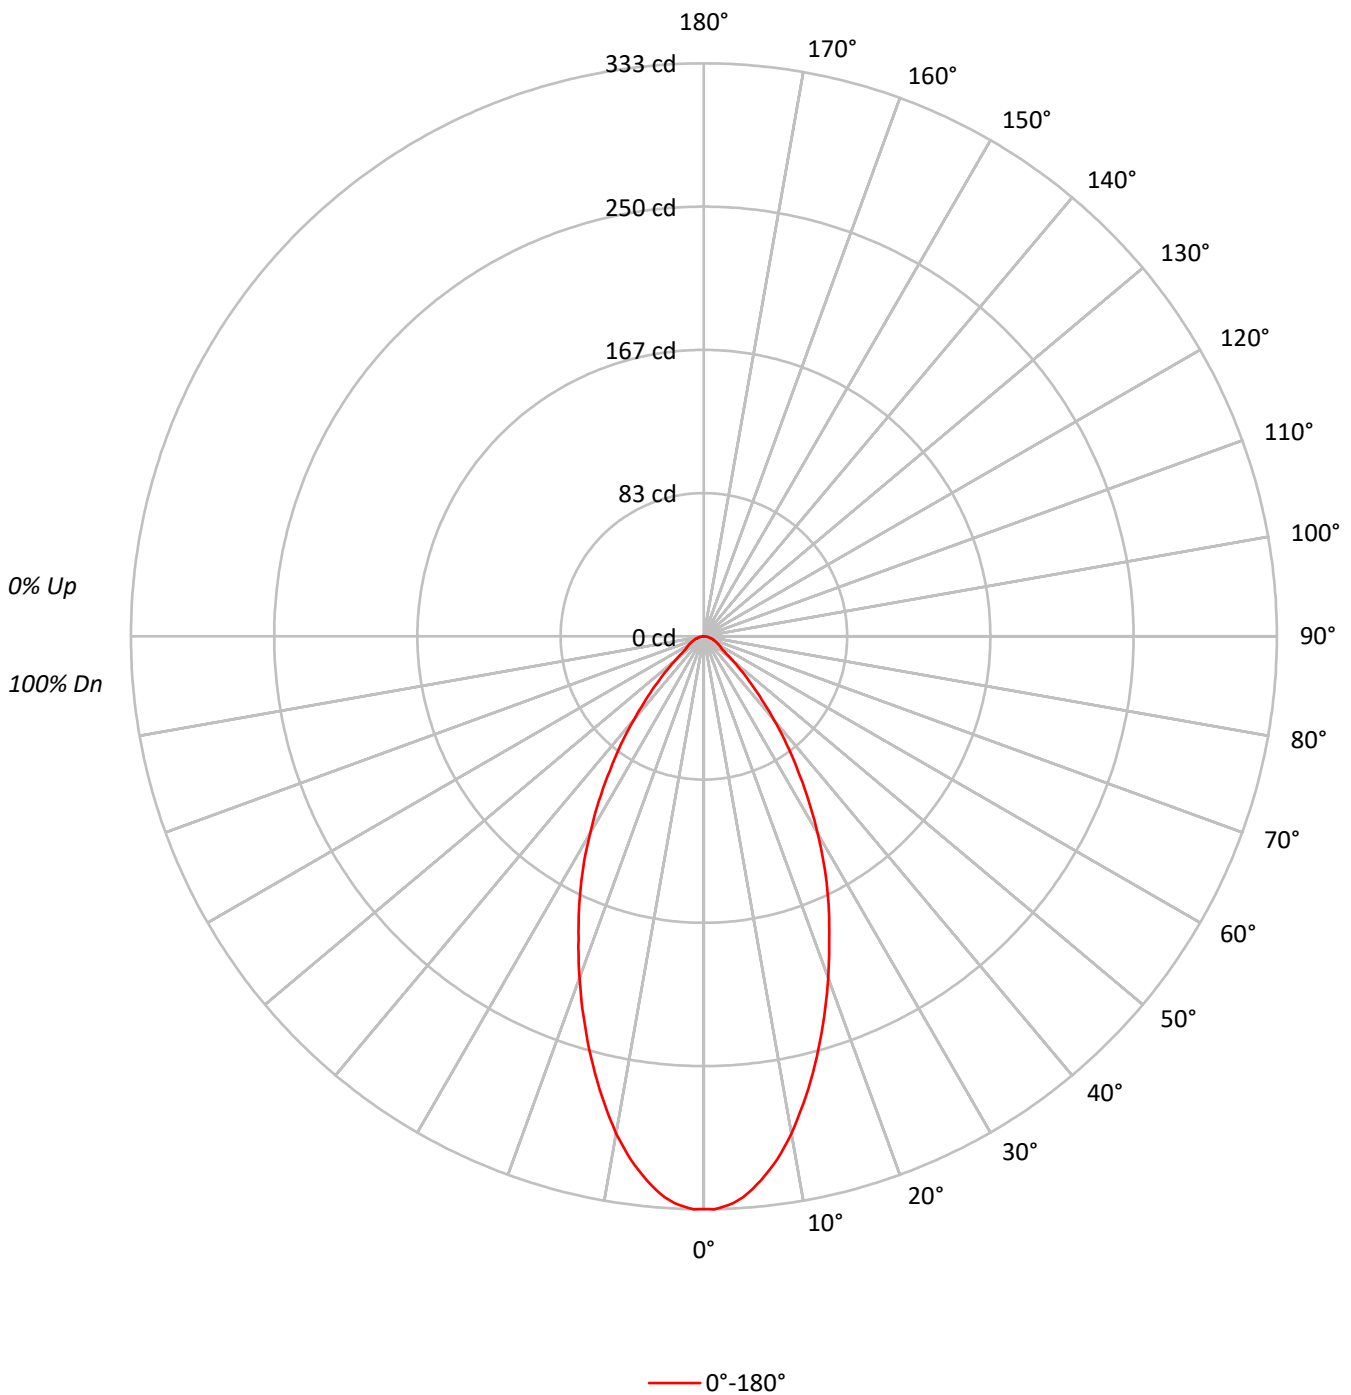



TEST NUMBER: P1295740  
 CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	72977
5°	71010
10°	65329
15°	57503
20°	49308
25°	41446
30°	33499
35°	25484
40°	18120
45°	11970
50°	7403
55°	4855
60°	4429
65°	4099
70°	3847
75°	3474
80°	3283
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11970 cd/sqm



TEST NUMBER: P1295740  
 CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	29.8	10.1
10°-20°	70.5	23.9
20°-30°	78.3	26.5
30°-40°	59.7	20.2
40°-50°	30.6	10.4
50°-60°	12.5	4.3
60°-70°	7.8	2.7
70°-80°	4.4	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	178.6	60.6
0°-40°	238.4	80.8
0°-60°	281.5	95.4
0°-90°	295.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	295.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	333	
5°	323	30
15°	253	71
25°	171	78
35°	95	60
45°	39	31
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1295740  
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1GPH\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	332.8
1°	333.1
2°	331.6
3°	329.8
4°	326.8
5°	322.6
6°	317.8
7°	312.5
8°	306.9
9°	300.2
10°	293.4
12.5°	273.9
15°	253.3
17.5°	232.3
20°	211.3
22.5°	190.4
25°	171.3
27.5°	152.1
30°	132.3
32.5°	113.5
35°	95.2
37.5°	79.1
40°	63.3
42.5°	49.8
45°	38.6
47.5°	29.2
50°	21.7
52.5°	16.1
55°	12.7
57.5°	11.6
60°	10.1
62.5°	9.0
65°	7.9
67.5°	6.7
70°	6.0
72.5°	4.9
75°	4.1
77.5°	3.4
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4
90°	0.0

(END OF REPORT)