

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295767

Luminaire Tested: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295767
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 611.0 lumens
Efficiency: N/A
Efficacy: 49.7 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295767
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K

Luminous Intensity Polar Plot

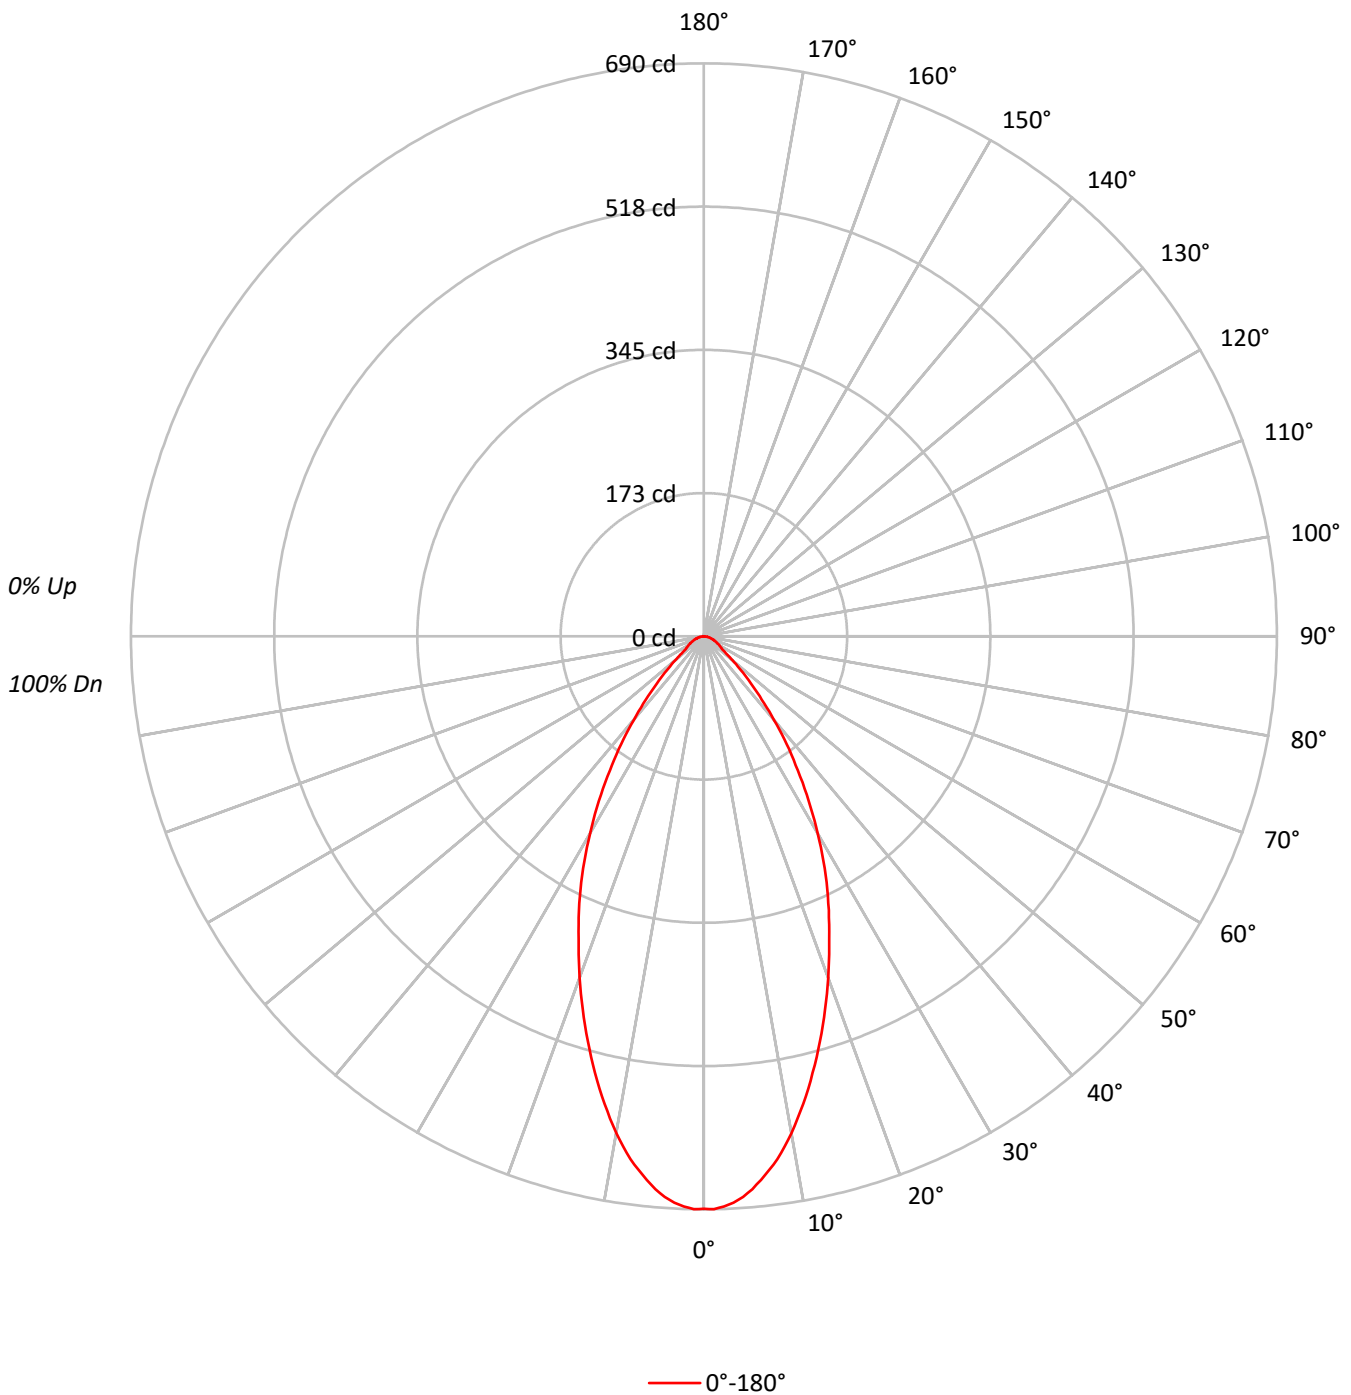



TEST NUMBER: P1295767

CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	151128
5°	147105
10°	135313
15°	119115
20°	102139
25°	85819
30°	69378
35°	52762
40°	37556
45°	24778
50°	15351
55°	10093
60°	9210
65°	8457
70°	7950
75°	7202
80°	6819
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24778 cd/sqm



TEST NUMBER: P1295767

CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.8	10.1
10°-20°	146.1	23.9
20°-30°	162.1	26.5
30°-40°	123.7	20.2
40°-50°	63.3	10.4
50°-60°	26.0	4.3
60°-70°	16.2	2.7
70°-80°	9.1	1.5
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.0	60.6
0°-40°	493.7	80.8
0°-60°	583.0	95.4
0°-90°	611.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	611.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	689	
5°	668	62
15°	525	146
25°	355	162
35°	197	124
45°	80	63
55°	26	26
65°	16	16
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P1295767
CATALOG NUMBER: P3AS13R20W2N902750DE010 E3DLD1WMH_4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	689.2
1°	690.0
2°	686.9
3°	683.0
4°	676.8
5°	668.3
6°	658.2
7°	647.3
8°	635.7
9°	621.7
10°	607.7
12.5°	567.4
15°	524.7
17.5°	481.2
20°	437.7
22.5°	394.3
25°	354.7
27.5°	315.1
30°	274.0
32.5°	235.2
35°	197.1
37.5°	163.8
40°	131.2
42.5°	103.2
45°	79.9
47.5°	60.5
50°	45.0
52.5°	33.4
55°	26.4
57.5°	24.1
60°	21.0
62.5°	18.6
65°	16.3
67.5°	14.0
70°	12.4
72.5°	10.1
75°	8.5
77.5°	7.0
80°	5.4
82.5°	3.9
85°	2.3
87.5°	0.8
90°	0.0

(END OF REPORT)