

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295848

Luminaire Tested: P3AS13R20W2N902765DE010 E3D1WH_6500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1295848
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRIS
Catalog Number: P3AS13R20W2N902765DE010 E3D1WH_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 6500K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 967.0 lumens
Efficiency: N/A
Efficacy: 78.6 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1295848
CATALOG NUMBER: P3AS13R20W2N902765DE010 E3D1WH_6500K

Luminous Intensity Polar Plot

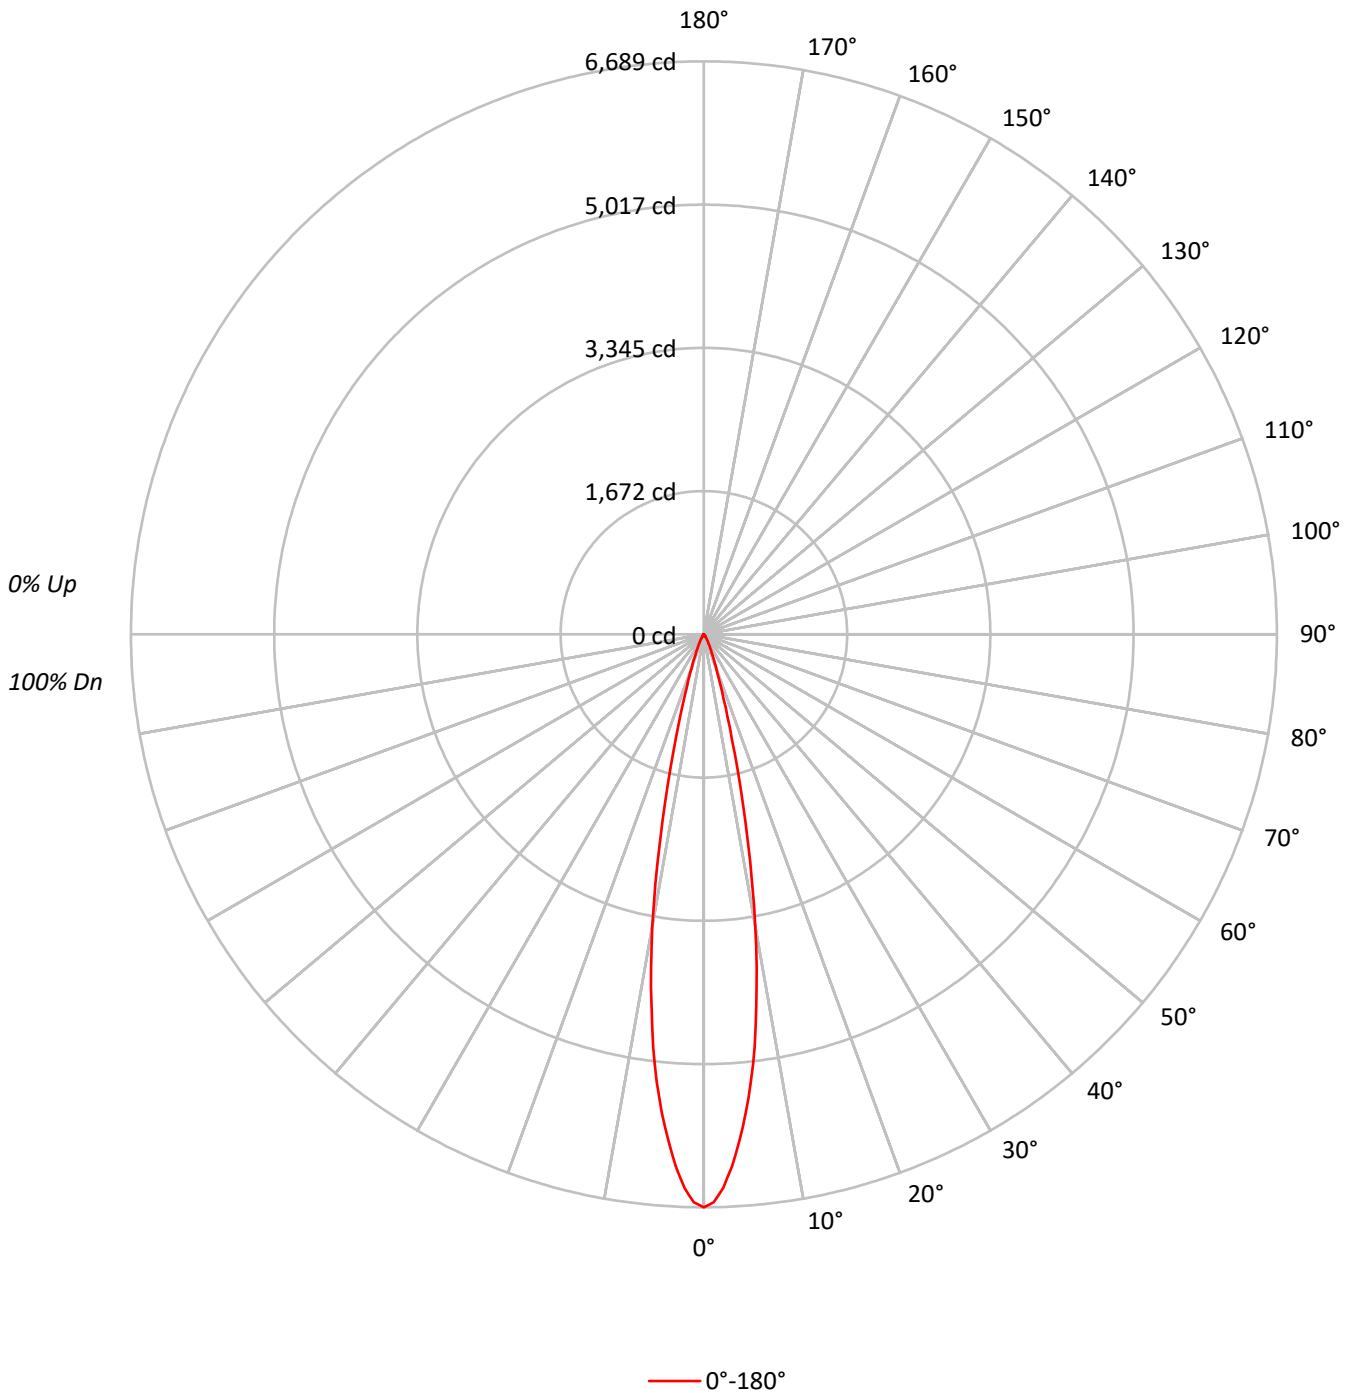



TEST NUMBER: P1295848

CATALOG NUMBER: P3AS13R20W2N902765DE010 E3D1WH_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 99 | 100 |
| 1 | 115 | 114 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99 | 97 | 97 | 97 | 97 |
| 2 | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 101 | 101 | 100 | 98 | 99 | 98 | 96 | 95 | 95 | 95 | 95 |
| 3 | 109 | 105 | 102 | 99 | 107 | 104 | 101 | 98 | 101 | 99 | 97 | 99 | 97 | 95 | 97 | 95 | 94 | 93 | 93 | 93 | 93 |
| 4 | 106 | 101 | 98 | 95 | 105 | 100 | 97 | 95 | 99 | 96 | 94 | 97 | 95 | 93 | 95 | 93 | 92 | 91 | 91 | 91 | 91 |
| 5 | 104 | 98 | 95 | 92 | 102 | 98 | 94 | 92 | 96 | 93 | 91 | 95 | 92 | 90 | 93 | 91 | 90 | 89 | 89 | 89 | 89 |
| 6 | 101 | 96 | 92 | 89 | 100 | 95 | 92 | 89 | 94 | 91 | 89 | 93 | 90 | 88 | 92 | 89 | 88 | 87 | 87 | 87 | 87 |
| 7 | 99 | 93 | 90 | 87 | 98 | 93 | 89 | 87 | 92 | 89 | 86 | 91 | 88 | 86 | 90 | 87 | 86 | 85 | 85 | 85 | 85 |
| 8 | 97 | 91 | 87 | 85 | 96 | 91 | 87 | 85 | 90 | 87 | 85 | 89 | 86 | 84 | 88 | 86 | 84 | 83 | 83 | 83 | 83 |
| 9 | 95 | 89 | 85 | 83 | 94 | 89 | 85 | 83 | 88 | 85 | 83 | 87 | 84 | 83 | 87 | 84 | 82 | 81 | 81 | 81 | 81 |
| 10 | 93 | 87 | 84 | 81 | 92 | 87 | 83 | 81 | 86 | 83 | 81 | 86 | 83 | 81 | 85 | 83 | 81 | 80 | 80 | 80 | 80 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1466856 |
| 5° | 1235040 |
| 10° | 771395 |
| 15° | 288401 |
| 20° | 98989 |
| 25° | 41252 |
| 30° | 19446 |
| 35° | 8700 |
| 40° | 4122 |
| 45° | 2109 |
| 50° | 785 |
| 55° | 153 |
| 60° | 175 |
| 65° | 208 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2109 cd/sqm



TEST NUMBER: P1295848

CATALOG NUMBER: P3AS13R20W2N902765DE010 E3D1WH_6500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 466.6 | 48.2 |
| 10°-20° | 384.3 | 39.7 |
| 20°-30° | 87.3 | 9.0 |
| 30°-40° | 22.2 | 2.3 |
| 40°-50° | 5.6 | 0.6 |
| 50°-60° | 0.7 | 0.1 |
| 60°-70° | 0.2 | 0.0 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 938.2 | 97.0 |
| 0°-40° | 960.5 | 99.3 |
| 0°-60° | 966.8 | 100.0 |
| 0°-90° | 967.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 967.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 6689 | |
| 5° | 5611 | 467 |
| 15° | 1270 | 384 |
| 25° | 170 | 87 |
| 35° | 32 | 22 |
| 45° | 7 | 6 |
| 55° | 0 | 1 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P1295848
CATALOG NUMBER: P3AS13R20W2N902765DE010 E3D1WH_6500K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 6689.4 |
| 1° | 6632.7 |
| 2° | 6465.6 |
| 3° | 6225.9 |
| 4° | 5931.7 |
| 5° | 5610.8 |
| 6° | 5253.1 |
| 7° | 4858.4 |
| 8° | 4397.9 |
| 9° | 3941.5 |
| 10° | 3464.4 |
| 11° | 2956.6 |
| 12° | 2449.6 |
| 13° | 2020.1 |
| 14° | 1609.5 |
| 15° | 1270.4 |
| 16° | 1002.7 |
| 17° | 790.9 |
| 18° | 635.6 |
| 19° | 516.8 |
| 20° | 424.2 |
| 21° | 354.6 |
| 22° | 296.0 |
| 23° | 246.1 |
| 24° | 205.3 |
| 25° | 170.5 |
| 27.5° | 111.5 |
| 30° | 76.8 |
| 32.5° | 47.3 |
| 35° | 32.5 |
| 37.5° | 20.8 |
| 40° | 14.4 |
| 42.5° | 9.8 |
| 45° | 6.8 |
| 47.5° | 4.5 |
| 50° | 2.3 |
| 52.5° | 1.1 |
| 55° | 0.4 |
| 57.5° | 0.4 |
| 60° | 0.4 |
| 62.5° | 0.4 |
| 65° | 0.4 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |



TEST NUMBER: P1295848
CATALOG NUMBER: P3AS13R20W2N902765DE010 E3D1WH_6500K

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|-----|
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)